



2025 CATALOG



OVER 1 BILLION VANES MADE!



**MADE IN
USA**



BOHNING YOUTH ARCHERY SCHOOLS AND CLUBS PROGRAM

Over our 75+ year history, Bohning has supported youth archery programs across the US and internationally. We hope to inspire lifelong interest in the sport of archery, whether that is through target archery or hunting.

We love to partner with Archery Clubs, Schools, and College Programs to promote fun, safe, and responsible habits in our youngest participants of the sport we all enjoy.

WHAT WE ARE OFFERING:

- Each approved youth archery club/school will receive entry level dealer pricing on all Bohning products purchased through the club. Members of your club can receive this same discount with proof of club membership.
- Special Packages designed for Youth or Collegiate Programs.
- Support for any questions or concerns regarding our products.
- A Bohning banner to hang at your club.
- A FREE welcome package that includes Bohning Youth Archery stickers, and one of our top-of-the-line fletching jigs.
- Opportunity to have custom vanes, wraps and decals made for your program.

WHAT WE WOULD LIKE FROM YOU:

- The club must complete the Youth Archery Club or Collegiate Archery Program Application.
- Send us a picture of the members of your club (preferably in front of our banner once you receive it).
- Notification of events and wins your club has so we can promote you through our social media.
- Send images, at least 2 times annually of events, practices, tournaments, club members or students (see application regarding photo releases).

We welcome you to fill out our online Archery Club Application. If you have any questions, please feel free to email us at info@bohning.com or call us at 231-229-4247.

Visit www.bohning.com for additional information and application.





TO ORDER:

WEBSITE: www.bohning.com

PHONE: 231-229-4247

TOLL FREE: 800-253-0136

EMAIL: info@bohning.com

FAX: 231-229-4615

ADDRESS:

Bohning
7361 N. 7 Mile Rd.
Lake City, MI 49651
USA



CONTENTS

FLETCHING JIGS	4
NOCKS	7
PREMIUM POINTS	10
WAXES	12
ADHESIVES	13
ARROW WRAPS	16
CUSTOM VANES & WRAPS	21
VANES	22
CROSSBOW PRODUCTS	33
YOUTH ARCHERY	34
QUIVERS	36
BOW CASES	38
ACCESSORIES	39
STRING ACCESSORIES	42
SERVING	45
TOOLS	46
TRADITIONAL	47
APPAREL	51
LURE PAINT	52
DISPLAYS	54
REPLACEMENT PARTS	56



WINGS, PINS, COINS,
MAGNETS, DOG TAGS,
DECALS & MORE



Bohning Creative is home to all of the custom printing and manufacturing for the Bohning Company. We produce everything from custom pilot wings to domed and printed challenge coins in metal and plastic.

Do you have a project that needs a unique custom product? Contact us!

www.bohningcreative.com




Website QR
Code

Check out the inside back cover for all of the Bohning Family of Companies!

ALPHA

AR1250 VANE MATERIAL


STEALTH + SPEED + TORQUE



ATLAS

AR1000 VANE MATERIAL

DURABILITY + FORGIVENESS + TORQUE

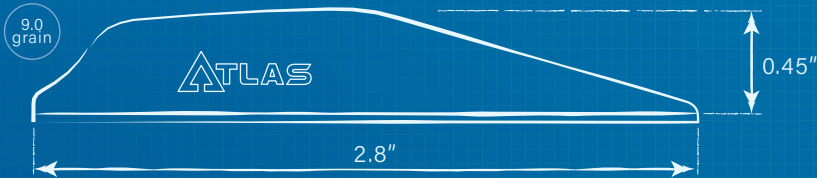


NEW VANE
PROFILE
EXPERIENCE

SEE PG. 24
FOR DETAILS

ALPHA / ATLAS PROFILE:

ADVANCED TORQUE APEX
+ GRADUAL TAPER TO TAIL
OPTIMAL BALANCE OF SPIN AND STEALTH

EXTENDED SHARP LEADING EDGE
CLEANLY CUTS THROUGH THE AIR
TO RETAIN DOWNRANGE SPEED.

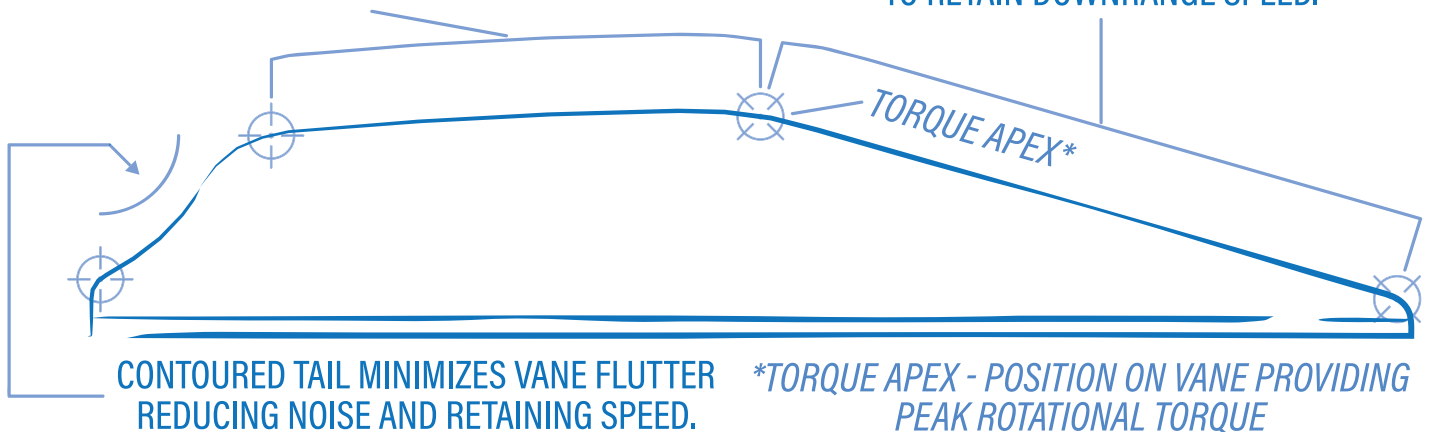

DESIGNED FOR CROSSBOW BOLTS/ARROWS

ANY DIAMETER - ANY NOCK STYLE - 3 VANES AT ONCE!

SEE PG. 5
FOR DETAILS



CROSSBOW CAULDRON
QUICK & ACCURATE 3 VANE FLETCHING

SLING QUIVER

SLING + QUIVER + HOIST ROPE
ALL IN ONE!

SEE PG. 37
FOR DETAILS



BOHNING REDESIGNED CRESTING JIG!

SEE PG. 47
FOR DETAILS



- New compact motor module
- Better spin on arrow shaft due to redistributed weight
- Improved longevity - Fewer wires
- Available with US or International Plug



NEW \$179.77 RETAIL PRICE! (was \$374.99)

FLETCHING JIGS



FRONTIER JIG

- Incorporates Bohning's clamp style inserts
- Fletch any diameter arrow or crossbow bolt
- Easy to use
- Easy to clean with Acetone
- Great for your bench, hunting camp, club, or in your pack
- Fletches with nock on for perfect indexing
- Small package size: 4"(10cm) x 3"(8cm) x 9"(22cm)
- Easy retail display

1346COMPLETE - All Inserts

1346 - 3 Deg R&L Only*

1346YOUTH - 1.5 Deg Right**

1346XB - 1 Deg Right
+ Xbow Receiver***

1346KIT - Frontier Jig Insert Kit****

601004 - Crossbow Receiver Adapter



THIS JIG WILL:

3 Fletch
(120°/120°/120°)
4 Fletch Standard
(90°/90°/90°/90°)

① **OPTIONAL:**
Crossbow Bolt
Receiver/Adapter

MADE IN
USA

FOLDS FLAT
FOR STORAGE AND PORTABILITY

INSERT INCLUDED WITH THE: **1346COMPLETE FRONTIER JIG:**

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Black	Plastic Vane	3° Right	3" (76mm)	601057
Gray	Plastic Vane	Straight	5" (127mm)	601059
Red	Plastic Vane	1° Right	5" (127mm)	601058
Yellow	Plastic Vane	1.5° Right	5" (127mm)	601064
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060

INCLUDES CROSSBOW RECEIVER

*1346 FRONTIER JIG INCLUDES:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Black	Plastic Vane	3° Right	3" (76mm)	601057
Purple	Plastic Vane	3° Left	3" (76mm)	601061

*1346YOUTH FRONTIER JIG INCLUDES:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Yellow	Plastic Vane	1.5° Right	5" (127mm)	601064

***1346XB FRONTIER JIG INCLUDES:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Red	Plastic Vane	1° Right	5" (127mm)	601057

INCLUDES CROSSBOW RECEIVER

****1346KIT FRONTIER JIG INSERT KIT:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Black	Plastic Vane	3° Right	3" (76mm)	601057
Gray	Plastic Vane	Straight	5" (127mm)	601059
Red	Plastic Vane	1° Right	5" (127mm)	601058
Yellow	Plastic Vane	1.5° Right	5" (127mm)	601064
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060

MULTI-FLETCHER®

- Incorporates Bohning's clamp style inserts
- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Easy clean up — clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles

601055 - Multi-Fletcher®

601056 - Clamp Plate

① **CROSSBOW
COMPATIBLE**



INSERTS INCLUDED WITH THE MULTI-FLETCHER:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART #
Gray	Plastic Vane	Straight	5" (127mm)	601059
Black	Plastic Vane	3° Right	3" (76mm)	601057
Red	Plastic Vane	1° Right	5" (127mm)	601058
Yellow	Plastic Vane	1.5° Right	5" (127mm)	601064
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060
Blue	Feather	2° Right	5" (127mm)	601062
Green	Feather	2° Left	5" (127mm)	601063

THIS JIG WILL:

3 Fletch
(120°/120°/120°)
4 Fletch Standard
(90°/90°/90°/90°)
4 Fletch X-Wing
(60°/120°/60°/120°)

① **INCLUDED:**
Crossbow Bolt
Receiver/Adapter



Part #: 601004



FLETCHING JIGS

3 VANE ADVANCED FLETCHING SYSTEM

CAULDRON®

- Fletches 3 vanes at once using Bohning's clamp style inserts
- Easy to switch inserts for different fletching configurations. No tools needed.
 - Straight
 - 1° Left offset
 - 1° Right offset
 - 1.5° Right offset
 - 3° Left helical
 - 3° Right helical
- Auto adjusts to fit arrows from micro to 27's.
- Fletches with nock on for perfect indexing

MADE IN
USA



601025 - Cauldron *

NEW 601025XB - Crossbow Edition**

601025HELIX - 3 Deg R&L Only***

601025YOUTH - 1.5 Deg R Only****

601026 - Adjustable Compression Ring

*INSERTS INCLUDED WITH THE CAULDRON:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/HELICAL	MAX LENGTH OF FLETCHING	PART #
Gray	Plastic Vane	Straight	5" (127mm)	601059-3
Black	Plastic Vane	3° Right	3" (76mm)	601057-3
Red	Plastic Vane	1° Right	5" (127mm)	601058-3
Yellow	Plastic Vane	1.5° Right	5" (127mm)	601064-3
Purple	Plastic Vane	3° Left	3" (76mm)	601061-3
Orange	Plastic Vane	1° Left	5" (127mm)	601060-3

** CAULDRON CROSSBOW JIG INCLUDES 1° & 3° RIGHT & LEFT INSERTS ONLY

*** CAULDRON HELIX JIG INCLUDES: 3° RIGHT & LEFT INSERTS ONLY

**** CAULDRON YOUTH JIG INCLUDES: 1.5° RIGHT ONLY

NEW

CAULDRON CROSSBOW EDITION WILL ACCEPT ANY SIZE CROSSBOW BOLTS

THIS JIG WILL:

3 Fletch
(120°/120°/120°)

CHANGE INSERTS WITH A SINGLE SNAP

PRO CLASS JIG

- Capable of 3 or 4 fletch (4 at 90° apart)
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm) long

1348 — Straight

1349 — Right Wing

1350 — Left Wing

MADE IN
USA



THIS JIG WILL:

3 Fletch
(120°/120°/120°)

4 Fletch Standard
(90°/90°/90°/90°)

PRO TIP:

HELICALS AND OFFSETS ARE THE SAME THING!

Manufacturers use different ways of classifying helicals and offsets, which can be confusing when making comparisons. First of all, let's clarify that helicals and offsets are essentially the same thing. A helical is defined as any vane angle that is not a 0° straight fletch. An offset is, quite simply, a minor helical and usually refers to anything between 0° and 2°. A vane that is fletched at greater than 2° appears more twisted due to the way it wraps around the shaft, however, a vane fletched at less than 2° still has a helical "twist", it is just less noticeable.

PRO CLASS PARTS

1351 — Straight

1352 — Right Wing

1353 — Left Wing

601020 — 1" (25mm) Vane

Fletching Clamp - Griffin Vane

601021 — 2" (50mm) Vane

Fletching Clamp - Griffin Vane

601004 - Crossbow Receiver/Adapter



① OPTIONAL:

Crossbow Bolt Receiver/Adapter




FLETCHING JIGS

MADE IN
USA

TOWER® JIGS

Tower jigs fletch 3 vanes at once and apply more pressure than standard jigs. One base with interchangeable arm options for feathers, plastic vanes, or mylar vanes.

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fletch all 3 vanes at once with precise 120° spacing
- Applies even pressure along the entire vane base
- Great for single or multiple vane repairs too!

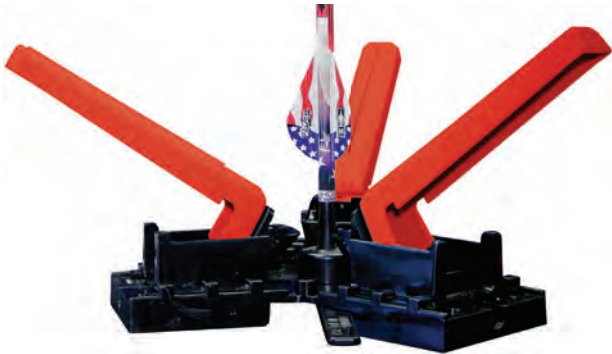

601027 - COMPLETE TOWER®

- Great for clubs and families
- All the Tower® Jig components in one purchase

12963 - TRIPLE TOWER®

- Arms: Straight, 3° Right, 1° Right
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

12962 - HELIX TOWER®

- Arms: Straight, 3° Left & Right
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

601010 - FEATHER TOWER®

- Arms: 2° Right & 2° Left Feather
- Center Posts: F Nock, Standard, Swedged

601001 - CROSSBOW TOWER®

- Arms: Straight, 1° Right
- Center Posts: Crossbow

601035 - MYLAR TOWER®

- Arms: Mylar Vane - Straight
- Center Posts: F Nock, Standard, Pin Nock

COLOR OF ARMS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART #
Gray (solid)	Plastic Vane	Straight	4" (101mm)	1201
Black	Plastic Vane	3° Right	3" (76mm)	1202
Red	Plastic Vane	1° Right	4" (102mm)	1200
Purple	Plastic Vane	3° Left	3" (76mm)	601038
Orange	Plastic Vane	1° Left	4" (102mm)	601037
Gray w/ Red Clip	Mylar Vane	Straight	3.75" (95mm)	601024
Blue	Feather	2° Right	5" (127mm)	601008R
Green	Feather	2° Left	5" (127mm)	601008L

See page 56 for other Tower® Jig replacement parts

THIS JIG WILL:

3 Fletch
(120°/120°/120°)

SOME MODELS:

1 CROSSBOW COMPATIBLE

See descriptions



NOCKS



Throat Size
.120" (3.05 mm)
6.5 grains (421 mg)

F NOCK*

● Fits **.166"** shafts

- Double-lock throat
- "Micro Diameter"

10141 — 12 pk
10142 — 100 pk
10143 — 1000 pk



Throat Size
.120" (3.05 mm)
7.0 grains (454 mg)

A NOCK*

● Fits **.204"** shafts

- Double-lock throat
- Raised index
- "Small Diameter"

10151 — 12 pk
10152 — 100 pk
10153 — 1000 pk



Throat Size
.120" (3.05 mm)
8.0 grains (518 mg)

H.E. NOCK

● Fits **.231"** shafts

- Double-lock throat
- Recessed index
- "Reduced Diameter"

401023 — 12 pk
401024 — 100 pk
401025 — 1000 pk



Throat Size
.109" (2.77 mm)
12.0 grains (778 mg)

SIGNATURE* NOCK

● Fits **.246"** shafts
(standard carbon size)

- Smooth throat
- Raised index
- "Standard Diameter"

1006 — 12 pk
1008 — 100 pk
1009 — 1000 pk



Throat Size
.120" (3.05 mm)
7.0 grains (454 mg)

SMOOTH RELEASE INSERT NOCK


● Fits **.246"** shafts
(standard carbon size)

- Single lock throat for ultimate accuracy
- Raised index
- "Standard Diameter"

401033 — 12 pk
401034 — 100 pk
401035 — 1000 pk


ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS:

TRANSLUCENT COLOR CHOICES

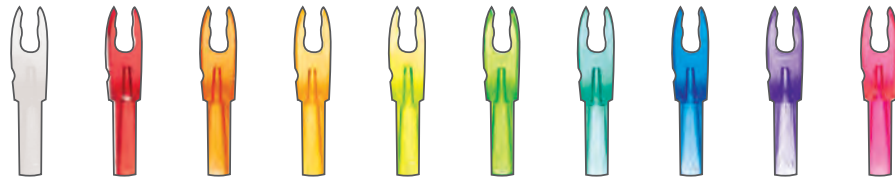

CL Clear **RU** Ruby **TG** Tangerine **AP** Apricot **LM** Lime **KW** Kiwi **TL** Teal **EB** Electric Blue **PU** Purple **RS** Rose Pink

SOLID COLOR CHOICES



WH White **BK** Black **RD** Red **NO** Neon Orange **NY** Neon Yellow **NG** Neon Green **SB** Satin Blue



Throat Size
.120" (3.05 mm)
9.0 grains (583 mg)

BLAZER* NOCK

● Fits **.246"** shafts
(standard carbon size)

- Double-lock throat
- Raised index
- "Standard Diameter"

1003 — 12 pk
1004 — 100 pk
1005 — 1000 pk

Nominal I.D.	0.166"	0.204"	0.231"	0.246"
Industry Name:	"Micro"	"Small"	"Reduced"	"Standard"
Bohning® Nocks:	F-Nock®	A-Nock®	H.E. Nock	Blazer Nock® Signature Nock® Smooth Release Nock
Easton® Nocks:	G-Nock	X-Nock	H-Nock	S-Nock
Size Family:	"4mm"	"5mm"	"6mm"	"6.5mm"

NOCKS



Small Throat Size
.106" (2.69 mm)
5.0 grains (324 mg)



Standard Throat Size
.120" (3.05 mm)
5.0 grains (324 mg)



Throat Size
.120" (3.05 mm)
5.0 grains (324 mg)

BLAZER® PIN NOCK

SMOOTH RELEASE PIN NOCK

Small Throat

- Fits most recurve bow strings
- Marked with the letter "R"
- Raised index

10161 — 12 pk

10162 — 100 pk

10163 — 1000 pk

Standard Throat

- Fits most compound bow strings
- Marked with the letter "V"
- Raised index

10071 — 12 pk

10072 — 100 pk

10073 — 1000 pk

- Fits most compound bow strings
- Marked with letter "M"
- Redesigned to fit broader range of pin sizes
- Smooth throat and short ears
- Raised index

401030 — 12 pk

401031 — 100 pk

401032 — 1000 pk



PRO TIP:

PIN NOCKS INSTALLATION:

DO NOT use excessive force to install the pin nock onto the adapter as this could cause cracks in the nock and lead to nock failure.



PRO TIP:

All Bohning Pin nocks now accommodate a broader range of pin adapter brands!

**MADE IN
USA**

ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS:

TRANSLUCENT COLOR CHOICES



CL
Clear



RU
Ruby



TG
Tangerine



AP
Apricot



LM
Lime



KW
Kiwi



TL
Teal



EB
Electric Blue



PU
Purple



RS
Rose Pink

SOLID COLOR CHOICES



WH
White



BK
Black



RD
Red



NO
Neon Orange



NY
Neon Yellow



NG
Neon Green



SB
Satin Blue

© PRO TIP: INSPECTING YOUR NOCK

The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This could harm you and damage your equipment. When in doubt, replace the nock.

NOCKS



Throat size .115" (2.92 mm)

CLASSIC NOCK

- Glue-on nock for swaged end aluminum, wood and fiberglass shafts
- Index and alignment feature


AVAILABLE SIZES:

- 5/16" (7.94 mm)
Avg. Weight: 10.0 grains (648 mg)
- 11/32" (8.73 mm)
Avg. Weight: 13.0 grains (842 mg)


- 10131** — 12 pk
- 10132** — 100 pk
- 10133** — 1000 pk



TRANSLUCENT COLOR CHOICES



SOLID COLOR CHOICES



See throat size below

T NOCK

- Glue-on nock for swaged end aluminum, wood & fiberglass shafts

AVAILABLE SIZES:

- 1/4" T Nock (6.35mm)
Throat size: 0.105" (2.67 mm) Average Weight: 6.0 grains (388 mg)
- 9/32" T Nock (7.14 mm)
Throat size: 0.115" (2.92 mm) Average Weight: 8.0 grains (519 mg)
- 5/16" T Nock (7.94 mm)
Throat size: 0.115" (2.92 mm) Average Weight: 14.0 grains (907 mg)
- 11/32" T Nock (8.73 mm)
Throat size: 0.105" (2.67 mm) Average Weight: 15.0 grains (972 mg)


- 1054T** — 12 pk
- 1055T** — 100 pk
- 1056T** — 1000 pk



SOLID COLOR CHOICES



TRANSLUCENT COLOR CHOICES



PRO TIP:
CLASSIC, T NOCK
AND LEGEND NOCK:
To install, simply
apply 3-4 drops of
Fletch-Tite Platinum,
Blazer Bond, or
Fletch-Fuse to the
tapered end of the
shaft. Use light
pressure, twist the
swaged nock on to
the tapered end one
full rotation until fully
seated.




11.0 grains (713 mg)

CROSSBOW NOCK

.300" Half Moon Nock (7.70 mm)

- 401008** — 12 pk
- 401009** — 100 pk
- 401010** — 1000 pk

SOLID COLOR CHOICES



Throat size .105" (2.67 mm)

LEGEND NOCK


- Glue-on nock for swaged end aluminum, wood and fiberglass shafts

AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm)
Average Weight 8.0 grains (519 mg)
- 5/16" Legend Nock (7.94 mm)
Average Weight: 11.0 grains (713 mg)

- 1057** — 12 pk
- 1058** — 100 pk
- 1059** — 1000 pk

SOLID COLOR TRANSLUCENT




SCREW-IN PREMIUM POINTS

AVAILABLE IN 6, 12, 120, AND 1,200 PACKS (SPECIFY PACK SIZE WHEN ORDERING)

BULLET POINTS AND CONCAVE POINTS

WHAT SCREW-IN POINT FITS MY ARROW?

PLACE YOUR SHAFT HERE
(start at largest diameter and move right until white dotted line is not visible)



(See conversion chart for metric)

SUPERIOR CONCENTRICITY
FOR A TRUE SPIN:
*GUARANTEED CONCENTRIC
WITHIN 0.001" (0.025MM)

* Points 150+
grains will have
concentricity of
0.002" or better



INDUSTRY-LEADING
WEIGHT TOLERANCES:
GUARANTEED
± 0.25 GRAINS (16.2 mg)

ENGINEERED FOR EASY
REMOVAL FROM TARGET

NOTE: CONCENTRICITY MEANS THAT THE TIP IS ACTUALLY IN THE CENTER OF YOUR POINT. IF THIS IS OFF, EVEN BY THE TINIEST AMOUNT, YOUR ARROW WILL NOT FLY TRUE.

SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	BULLET PART #	CONCAVE PART #
17/64"	85 gn (5.5 g)	0.266" (6.75 mm)	851009	851091
	100 gn (6.5 g)		851010	851092
	125 gn (8.1 g)		851011	851093
9/32"	85 gn (5.5 g)	0.281" (7.14 mm)	851012	851076
	100 gn (6.5 g)		851013	851077
	125 gn (8.1 g)		851014	851078
	150 gn (9.7 g)		8510108	Not Available
19/64"	85 gn (5.5 g)	0.297" (7.54 mm)	851015	851079
	100 gn (6.5 g)		851016	851080
	125 gn (8.1 g)		851017	851081
5/16"	85 gn (5.5 g)	0.313" (7.94 mm)	851018	851082
	100 gn (6.5 g)		851019	851083
	125 gn (8.1 g)		851020	851084
	150 gn (9.7 g)		8510105	Not Available
	200 gn (13.0 g)		8510109	Not Available
	NEW 250 gn (16.2 g)		8510116	Not Available
	NEW 300 gn (19.4 g)		8510117	Not Available
21/64" CROSSBOW COMPATIBLE	85 gn (5.5 g)	0.328" (8.33 mm)	Not Available	851085
	100 gn (6.5 g)		851021	851086
	125 gn (8.1 g)		851022	851087
	150 gn (9.7 g)		8510106	Not Available
11/32" CROSSBOW COMPATIBLE	85 gn (5.5 g)	0.344" (8.73 mm)	Not Available	851088
	100 gn (6.5 g)		851023	851089
	125 gn (8.1 g)		851024	851090
	150 gn (9.7 g)		8510107	Not Available
	200 gn (13.0 g)		8510110	Not Available

NEW

PREMIUM POINTS WITH O-RING



SIZE	WEIGHT GRAIN/GRAM	SHAFT O.D.	BULLET PART #
17/64"	100 gn (6.5 g)	0.266" (6.75 mm)	851010R
9/32"	100 gn (6.5 g)	0.281" (7.14 mm)	851013R
19/64"	100 gn (6.5 g)	0.297" (7.54 mm)	851016R
5/16"	100 gn (6.5 g)	0.313" (7.94 mm)	851019R
	125 gn (8.1 g)		851020R
11/32"	100 gn (6.5 g)	0.344" (8.73 mm)	851023R

The installed O-Ring keeps your point tight, even with left-helical fletchings. Helps align your point to the arrow insert.

CONVERSION CHART

17/64"	0.266"	6.75 mm
9/32"	0.281"	7.14 mm
19/64"	0.296"	7.54 mm
5/16"	0.313"	7.95 mm
21/64"	0.328"	8.33 mm
11/32"	0.344"	8.74 mm

GLUE-IN PREMIUM POINTS

AVAILABLE IN 12 PACKS
PIN POINTS



SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
PS23	100 gn (6.5 g)	Black Eagle®	851036
	150 gn (9.7 g)		851037
	180 gn (11.7 g)		851038
PS26	100 gn (6.5 g)	Black Eagle®	8510100
	120 gn (7.8 g)		8510101
	150 gn (9.7 g)		8510102
	180 gn (11.7 g)		8510103
PS27	120 gn (7.8 g)	Black Eagle®	851039
	180 gn (11.7 g)		851040
	210 gn (13.6 g)		851041
	250 gn (16.2 g)		851042
Tank 23D/ X Buster (350 - 500 Spine)	100 gn (6.5 g)	Carbon Express®	851030
	120 gn (7.8 g)		851031
	150 gn (9.7 g)		851032
	180 gn (11.7 g)		851075
X Buster (600 - 700 Spine)	120 gn (7.8 g)	Carbon Express®	851063
	150 gn (9.7 g)		851064
	180 gn (11.7 g)		851065
Line JammerPro	100 gn (6.5 g)	Carbon Express®	851047
	120 gn (7.8 g)		851048
	150 gn (9.7 g)		851049

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
X23 2312 <small>NEW</small>	150 gn (9.7 g)	Easton®	851001
	180 gn (11.7mg)		8510112
	200 gn (13.0 g)		851002
X23 2314 <small>NEW</small>	150 gn (9.7 g)	Easton®	851003
	180 gn (11.7mg)		8510113
	200 gn (13.0 g)		851004
X23 2315 <small>NEW</small>	150 gn (9.7 g)	Easton®	851005
	180 gn (11.7mg)		8510114
	200 gn (13.0 g)		851006
X23 2318 <small>NEW</small>	150 gn (9.7 g)	Easton®	851028
	180 gn (11.7mg)		8510116
	200 gn (13.0 g)		851029
X27 2712 <small>NEW</small>	250 gn (16.2 g)	Easton®	8510121
	200 gn (13.0 g)		851007
	300 gn (19.4 g)		851008
FatBoy	100 gn (6.5 mg)	Easton®	851094
	150 gn (9.7 mg)		851095
	180 gn (11.7mg)		851096
SuperDrive 23	100 gn (6.5 g)	Easton®	851033
	120 gn (7.8 g)		851034
	150 gn (9.7 g)		851035
SuperDrive 25	100 gn (6.5g)	Easton®	851050
	150 gn (9.7 g)		851051
	180 gn (11.7 g)		851052
SuperDrive 27	150 gn (9.7 g)	Easton®	851066
	180 gn (11.7 g)		851067

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
GT22	100 gn (6.5 g)	Gold Tip®	8510104
	120 gn (7.8g)		851097
	150 gn (9.7 g)		851098
	180 gn (11.7 g)		851099
X-Cutter	100 gn (6.5 g)	Gold Tip®	851056
	120 gn (7.8 g)		851057
Nine.3 Max <small>NEW</small>	100 gn (6.5 g)	Gold Tip®	851053
	120 gn (7.8 g)		851054
	150 gn (9.7 g)		851055
	180 gn (11.7 g)		8510119
Triple X <small>NEW</small>	200 gn (13.0 g)	Gold Tip®	8510120
	120 gn (7.8 g)		851072
	180 gn (11.7 g)		851073
	210 gn (13.6 g)		851074
V-TAC 23 NVX 23 <small>NEW</small>	250 gn (16.2 g)	Victory®	8510112
	300 gn (19.4 g)		8510123
	100 gn (6.5 g)		851060
V-TAC 25 NVX 25 <small>NEW</small>	150 gn (9.7 g)	Victory®	851061
	180 gn (11.7 g)		851062
	200 gn (13.0 g)		8510118
	100 gn (6.5 g)		851056
V-TAC 27 NVX 27	120 gn (7.8 g)	Victory®	851057
	150 gn (9.7 g)		851058
NVX 25 HV	100 gn (6.5 g)	Victory®	851059
	120 gn (7.8 g)		851043
V-TAC 27 NVX 27	180 gn (11.7 g)	Victory®	851044
	210 gn (13.6 g)		851045
	250 gn (16.2 g)		851046

**MADE IN
USA**

BREAK-OFF



SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	PART #
0.166"/4.22 mm Type I	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS UP TO 0.218" (5.54MM)	851025
0.166"/4.22 mm Type II	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS 0.219"- 0.228" (5.56 - 5.79MM)	851026
0.166"/4.22 mm Type III	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS 0.229" (5.82MM) AND UP	851027



To install glue in points use Ferr-L-Tite for aluminum arrows and Ferr-L-Tite Cool Flex for carbon or carbon hybrid arrows.

WAXES



SEAL-TITE®

- Silicone-based bowstring wax
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Vegan

1360 — 0.92 oz tube

(28 grams)

1360Box — 1 box 1.41 oz
(40 grams)

BULK OPTIONS:

1631 — 24 tubes

1631BOWL - Bowl and 24pk

35001 — 250 tubes

3500 — 500 tubes

1631Box — 24 boxes

35001Box — 250 boxes

3500Box — 500 boxes



TEX-TITE®

- Natural-based bowstring wax
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

1306 — 0.92 oz tube

(28 grams)

1306Box — 1 box 1.41 oz
(40 grams)

BULK OPTIONS:

1630 — 24 tubes

1630BOWL - Bowl and 24pk

32001 — 250 tubes

3200 — 500 tubes

1630Box — 24 boxes

32001Box — 250 boxes



XCCELERATOR WAX®

- 3200Box** — 500 boxes
- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

1365 — 0.51 oz tube

(14.5 grams)

BULK OPTIONS:

1634 — 16 tubes

1634BOWL - Bowl and 16 pk

1365-250 - 250 tubes



STRING SHIELD®

- Silicone-based liquid wax
- Sponge-top applicator
- Odorless and waterproof
- Vegan

301019 — 1.18 oz tube
(35 ml)

BULK OPTIONS:

301019-16 - 16 tubes

301019BOWL - Bowl & 16 pk

301019-250 - 250 tubes



PRO TIP:
STRING SHIELD'S™ liquid formula penetrates fibers of individual strands on string.



ZIP SNAP®

ZipSnap is a natural product that will help protect and lubricate all zippers and snaps.

301028 — 0.39 oz tube
(11.0 grams)

BULK OPTIONS:

301028-24 - 24 tubes

301028BOWL - Bowl & 24pk

301028-250 - 250 tubes



PRO TIP:

OTHER USES FOR SEAL-TITE® and TEX-TITE®

- Apply to nock shank on press-fit nocks for easier insertion and indexing.
- Apply to pin bushings for easier installation and indexing of tight-fitting pin nocks.
- Apply to point and broadhead threads to keep them from loosening and to help prevent rust.



PRO TIP:

SEAL-TITE® and TEX-TITE® are available in convenient and simple to use drop side boxes for the easiest bow string wax application on the market. No more wax melting out of a tube and all over your bow case and expensive equipment.

BOWSTRING WAX APPLICATION:

SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	SEAL-TITE BOX - TEX-TITE BOX
STEP 1 (ALL WAXES): Start with a clean string: using a rag dipped in warm water, or by wrapping a serving thread around the string and moving it up and down, remove dirt and old wax.				
SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	SEAL-TITE BOX - TEX-TITE BOX
STEP 2: Warm the tube of wax by rolling it between your hands. Remove the lid and push or twist the bottom to move the wax up in the tube. Apply wax liberally to bowstrings. Rub wax into the string fibers briskly using your fingers or a leather strip - as wax warms, it melts into the string fibers.			Step 2: Apply thin coat to bowstring using the foam applicator	Step 2: Lower the sides of the applicator box and apply wax liberally to bowstrings. Rub wax into string fibers using your fingers or leather strip - as the wax warms, it melts into the string fibers

ADHESIVES

CHOOSE YOUR ADHESIVE



FLETCH-TITE PLATINUM®

- Solvent-based glue designed for vanes, feathers and swedged nocks
- Works on carbon, aluminum, wood, fiberglass, wraps and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 53
- Industry standard for over 75 years

1301 — 3/4 oz Tube (22.1ml)

BULK OPTIONS:

301040 — 40 pk

301030 — 200 pk

301006EQ — 6 pk*

301040EQ — 40 pk*

301030EQ — 200 pk*

All come in clamshell package

1356 — Pint (473.1 ml)

1357 — Quart (946.4 ml)

1358 — Gallon (3.79 l)

*Packed to meet "Excepted Quantities" International ocean and air transportation requirements in order to reduce dangerous goods fees.

WARNING: Cancer and Reproductive Harm.
www.P65Warnings.ca.gov.



BLAZER BOND®

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 20 seconds, cure time 2 hours
- Use a very thin bead or several dots spread out for best adhesion
- Works well in humid conditions

301015 — 1/2 oz Bottle (17.2 ml)

301016 — 1 oz Bottle (29.6 ml)



FLETCH FUSE™

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 30 seconds, cure time 2 hours
- Budget-friendly

301025 — 1/2 oz Bottle (17.2 ml)

BULK OPTIONS

301025-24 - 24 Bottles

301025BOWL - Bowl and 24 pk



ARROW LOCK™

- Rubberized Instant Glue
- Designed for points and inserts
- Works on all shaft types
- Begins curing in 90 sec
- Fully cured 24 hours

301069 — .71 oz Bottle (20 g)



INSERT IRON™

- Designed for points and inserts
- Works on all shaft types
- 48 hour cure time (72 hours if air is dry)

1317 — 1 oz Bottle (29.6 ml)

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH-TITE PLATINUM	Vanes Feathers Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	5 Minutes	Minimum: 24 hours 48 hours is best

USEFUL INFORMATION:

- Flexible (non-brittle) bond - absorbs shock when shooting into a target repeatedly.
- Does not crack or become brittle.
- Along with other applications, use this glue on tip and tail of vanes or feathers for added security.
- Easy jig clean-up - simply scrape glue off. Do not use knife or any sharp instruments.
- Best in low humidity applications.
- Two year expiration on unopened tubes.
- Do NOT store solvent-based adhesives in the refrigerator.

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
BLAZER® BOND**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	20 Seconds	2 Hours

USEFUL INFORMATION:

- Fastest curing time.
- Instant, rigid-bonding glue.
- Medium viscosity (Bohning's most liquid CA glue).
- Begins curing on contact.
- Best for high humidity application.
- One year expiration on unopened bottles.

** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH FUSE**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	30 Seconds	2 Hours

USEFUL INFORMATION:

- Instant, rigid-bonding glue.
- Medium viscosity (thicker than Blazer Bond).
- Begins curing on contact.
- Best for high humidity application.
- One year expiration on unopened bottles.

** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
ARROW LOCK**	Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass	n/a	24 Hours

USEFUL INFORMATION:

- Rubberized Instant, rigid-bonding glue.
- Medium viscosity (thicker than Blazer Bond).
- Begins curing at 90 sec.
- One year expiration on unopened bottles.

** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
INSERT IRON	Points Inserts Outserts	Carbon Cedar Aluminum Fiberglass	n/a	48 Hours (72 Hours if air is dry)

USEFUL INFORMATION:

- Strongest glue.
- Insert Iron expands when curing. Hold point or insert in place while curing.
- Cures with moisture - best when applied in humid conditions.
- One year expiration on unopened bottles.
- DO NOT store in the refrigerator.

ADHESIVES

HOT MELT ADHESIVES



CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE	Points Inserts Outserts	Cedar Aluminum	n/a	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive. • Heat reversible on aluminum shafts - flame required • No expiration.				

FERR-L-TITE® FOR USE WITH ALUMINUM ARROW

- Designed for points and inserts
- Recommended for wood and aluminum shafts
- Not for carbon shafts
- Heat-reversible on aluminum shafts—high temperature required
- Melting point of 350° F (176.7° C)
- Industry standard for 75+ years (our first product)

1309 — 12 Gram Stick

BULK OPTIONS:

1339 — 1 lb. Brick (453.6 g)
1633 — 16 Sticks (Bulk)
31001 — 250 Sticks (Bulk)

COOL FLEX® FOR USE WITH CARBON ARROW

- Designed for points, inserts and bushings
- Recommended for carbon, aluminum and fiberglass shafts
- Fully cured when it reaches room temperature
- Use hot water for adjustment, replacement or removal
- Melting point of 280° F (137.8° C)

1308 — 12 Gram Stick

BULK OPTIONS:

1368 — 1 lb. Brick (453.6 g)
13081 — 16 Sticks (Bulk)
13082 — 250 Sticks (Bulk)

ALCOHOL BURNER

- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

1315 — Burner

1316 — Replacement wick

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
COOL FLEX	Points Inserts Outserts Pin Bushings	Carbon Aluminum Fiberglass	N/A	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive (low melt) • No expiration.				



PREMIUM FLETCHING TAPE

- Designed for feathers and mylar vanes
- Works on all shaft types
- Length 60' (18.3m), width 0.188" (4.8mm)
- Machine-cut without lubricant so no dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers

1649 - 60' Fletching Tape

FLETCHING TAPE DISPENSER

- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris
- Refillable; includes 1 roll of premium fletching tape
- Screw holes for easy mounting

801099 - Tape Dispenser

DISPENSER BOTTLES

- 2 oz (59.1 ml) bottle for use with Fletch-Tite Platinum
- Deluxe bottle has a smaller opening for easier/ cleaner application

1303 — Regular

1304 — 6 pk regular (red)
replacement nozzles
and caps

13031 — Deluxe

13032 — 6 pk deluxe (white)
replacement nozzles
and caps

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCHING TAPE	Feathers Mylar Vanes	All	N/A	Immediate
USEFUL INFORMATION • Pressure sensitive adhesive • No expiration				



PRO TIP:

CHOOSING AN ADHESIVE

When choosing an adhesive, it is always best practice to choose one that has been tested and proven to work best for your application. Bohning adhesives have been tested over thousands of fletches, nocks and inserts. For the best performance of your adhesives, be aware of several factors that may affect adhesion, including: humidity, application, and time required for cure.

BASIC FLETCHING INSTRUCTIONS:

NOTE: For All Bohning Vanes - Do not clean base of vane or use Primer Pen. All Bohning vanes are double pre-primed at the factory. No additional cleaning or priming is recommended.

1. Make sure that the jig is correctly set up so that the clamp/arm seats firmly to the shaft for the entire length of the vane. Test this by dry fitting shaft and vane in jig without glue.
2. Place vane at the desired height in the clamp/arm to get desired distance from the nock.
3. For Fletch-Tite Platinum apply adhesive over the entire vane base. For Blazer Bond and Fletch-Fuse apply several dots of adhesive along the vane base and then use the tip of the bottle to spread the adhesive along the length of the base.
4. Clamp the vane in the jig for 5 minutes for Fletch-Tite Platinum, 20 seconds for Blazer Bond and 30 seconds for Fletch-Fuse.
5. Carefully remove arrow from the jig and allow Fletch-Tite Platinum to cure for 24-48 hours, Blazer Bond and Fletch-Fuse for 2 hours before use.

ADHESION TROUBLE-SHOOTING:

The best prevention for adhesion problems is to properly clean your arrows using Bohning SSR Powder. ****DO NOT** clean Bohning Vanes.

Follow the correct clamp and cure time for the adhesive that you are using.

Make sure your fletching area and hands are free from spray lubricants, dust, pet hair, greasy food, chemicals or aerosol sprays.

Use the correct amount of adhesive based on the adhesive type.

Clean your jig frequently. For Bohning jigs, a short soak of the arm/clamp/insert in acetone will remove excessive adhesive.

Never use a knife to scrape off excess glue! This will cause damage to the jig.

IDENTIFYING FLETCHING ADHESION PROBLEMS:

If fletching fails with adhesive remaining on the shaft but not on the fletch, this indicates an incompatibility between the adhesive and the fletch. Ensure the adhesive you have chosen is the correct choice for your fletch.

If the fletching fails with adhesive remaining on the vanes but not the shaft, this would indicate a problem with the arrow shaft.


Start by cleaning the arrow shaft using the Bohning SSR Powder, making sure to rough up the shaft surface and then rinse with hot water and allow to dry.

If the fletching fails with the adhesive remaining on both the vane and the shaft, this could indicate a setup problem with the jig, a damaged clamp, inadequate adhesive curing or a possible contamination on the shaft or vanes.

ARROW WRAPS

WRAP SIZING AND INFO:

ARROW WRAP FIT GUIDE

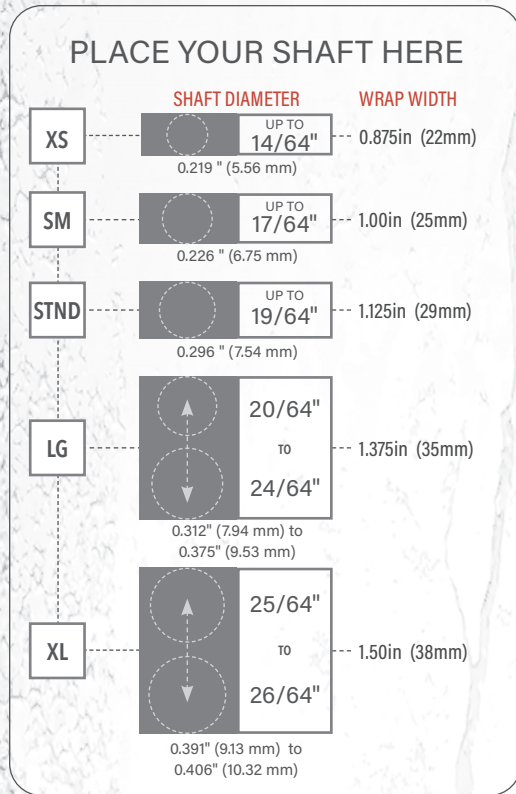

WEIGHT CODE

WEIGHT OF SINGLE WRAP
IN GRAINS

	1	2	3	4
4" WRAP				
XS	4.2 gn (272 mg)	5.4 gn (350 mg)	8.4 gn (544 mg)	
SM	4.8 gn (311 mg)	6.2 gn (402 mg)	9.5 gn (616 mg)	
STND	6.0 gn (389 mg)	7.7 gn (499 mg)	11.9 gn (771 mg)	
LG	6.5 gn (421 mg)	8.4 gn (544 mg)	13.0 gn (842 mg)	
XL	7.2 gn (467 mg)	9.2 gn (596 mg)	14.3 gn (927 mg)	
5.5" WRAP				
XS	5.8 gn (376 mg)	7.4 gn (480 mg)	11.5 gn (745 mg)	
SM	6.6 gn (428 mg)	8.5 gn (551 mg)	13.1 gn (849 mg)	
STND	8.3 gn (538 mg)	10.6 gn (687 mg)	16.4 gn (1063 mg)	
LG	9.0 gn (583 mg)	11.5 gn (745 mg)	17.8 gn (1153 mg)	
XL	9.9 gn (642 mg)	12.7 gn (823 mg)	19.7 gn (1277 mg)	
7" WRAP				
XS	7.4 gn (480 mg)	9.4 gn (609 mg)	14.6 gn (946 mg)	
SM	8.4 gn (544 mg)	10.8 gn (700 mg)	16.7 gn (1082 mg)	
STND	10.5 gn (680 mg)	13.5 gn (875 mg)	20.9 gn (1354 mg)	
LG	11.4 gn (739 mg)	14.6 gn (946 mg)	22.7 gn (1471 mg)	
XL	12.6 gn (816 mg)	16.2 gn (1050 mg)	25.1 gn (1626 mg)	


- 1 = HIGH DEFINITION MATERIAL
- 2 = NEON MATERIAL
- 3 = SOLID COLOR MATERIAL
- 4 = REFLECTIVE MATERIAL

PRO TIP:

Applying arrow wraps: Ensure your hands are clean and free of contaminants that may adversely affect adhesion. Remove wrap from backing, placing wrap adhesive side up on a mouse pad or other semi-soft surface. Align shaft with the edge of the wrap and roll with steady motion and downward pressure. Once wrap is applied, roll the arrow between your hands to fully activate the adhesive. Place the index fletching over the wrap seam to help secure the wrap.

WRAP AROUND NUMBER DECAL

- Great way to number best arrows
- 16 sets of numbers 1-12
- Fits arrows up to standard diameter : 19/64" / 0.296" (7.54mm)



0.5grains
(32 mg)

501012WA -Number Decals

VISI-WRAP

- Find arrows in poor light!
- 3 sets of 12 highly reflective decal wraps
- Fits arrows up to standard diameter: 19/64" / 0.296" (7.54mm)



1.8grains
(117 mg)

501018BL — Bohning Logo
501018TS — Tiger

CROSSBOW BOLT/ARROW WRAP

NEW

CROSSBOW
HIGH VISIBILITY & REFLECTIVE WRAPS



REFLECTIVE + 5 Other Colors

Most crossbow users do not fletch their own bolts. We have designed these high visibility and reflective wraps to be put on AFTER the arrow has been fletched! They are sized to fit large diameter bolts (can be cut to width).

501013 - 6 Pack Crossbow Bolt/Arrow Wraps



ARROW WRAPS

SOLID WRAPS

- Indicate color code when ordering
- 13 wraps per pack

4" WRAP (101.6 mm)

501031 — 4" Standard
501032 — 4" Small
501033 — 4" XS
501034 — 4" Large
501035 — 4" XL













5.5" WRAP (139.7 mm)

501071 — 5.5" Standard
501072 — 5.5" Small
501073 — 5.5" XS
501074 — 5.5" Large
501075 — 5.5" XL

7" WRAP (177.8 mm)

501051 — 7" Standard
501052 — 7" Small
501053 — 7" XS
501054 — 7" Large
501055 — 7" XL

SOLID AND REFLECTIVE WRAPS

WH White	REF Reflective	BKO Blackout	WB Black	NR Neon Red	NO Neon Orange	NY Neon Yellow	NG Neon Green	TL Teal	BL Blue	PU Purple	HP Hot Pink
											
2	4	2	2	3	3	3	3	3	3	3	3

WEIGHT CODE (SEE TABLE PG. 16)

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

501001 — 4" Standard
501002 — 4" Small
501003 — 4" XS
501004 — 4" Large
501005 — 4" XL


5.5" WRAP (139.7 mm)

501061 — 5.5" Standard
501062 — 5.5" Small
501063 — 5.5" XS
501064 — 5.5" Large
501065 — 5.5" XL

7" WRAP (177.8 mm)

501041 — 7" Standard
501042 — 7" Small
501043 — 7" XS
501044 — 7" Large
501045 — 7" XL

TIGER WRAPS

WT White Tiger	WRT White & Neon Red Tiger	GWT Green & White Tiger	WBT White & Blue Tiger	RT Red Tiger	OT Orange Tiger	YT Yellow Tiger	GT Green Tiger	TT Teal Tiger	BT Blue Tiger	PUT Purple Tiger	PT Pink Tiger
											
3	3	3	3	3	3	3	3	3	3	3	3

WEIGHT CODE (SEE TABLE PG. 16)

ARROW WRAPS

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

- 501001** — 4" Standard
- 501002** — 4" Small
- 501003** — 4" XS
- 501004** — 4" Large
- 501005** — 4" XL

5.5" WRAP (139.7 mm)

- 501061** — 5.5" Standard
- 501062** — 5.5" Small
- 501063** — 5.5" XS
- 501064** — 5.5" Large
- 501065** — 5.5" XL

7" WRAP (177.8 mm)

- 501041** — 7" Standard
- 501042** — 7" Small
- 501043** — 7" XS
- 501044** — 7" Large
- 501045** — 7" XL



WEIGHT CODE (SEE TABLE PG. 16)

WRAP WIDTH: See pg. 16 for fitting guide

XS

0.875in (22mm)

SMALL

1.00in (25mm)

STANDARD

1.125in (29mm)

LARGE

1.375in (35mm)

XL

1.50in (38mm)



WEIGHT CODE (SEE TABLE PG. 16)

MORE PATTERNS AND DESIGNS AVAILABLE ONLINE:



ARROW WRAPS

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

501001 — 4" Standard

501002 — 4" Small

501003 — 4" XS

501004 — 4" Large

501005 — 4" XL

5.5" WRAP (139.7 mm)

501061 — 5.5" Standard

501062 — 5.5" Small

501063 — 5.5" XS

501064 — 5.5" Large

501065 — 5.5" XL

7" WRAP (177.8 mm)


501041 — 7" Standard

501042 — 7" Small

501043 — 7" XS

501044 — 7" Large

501045 — 7" XL

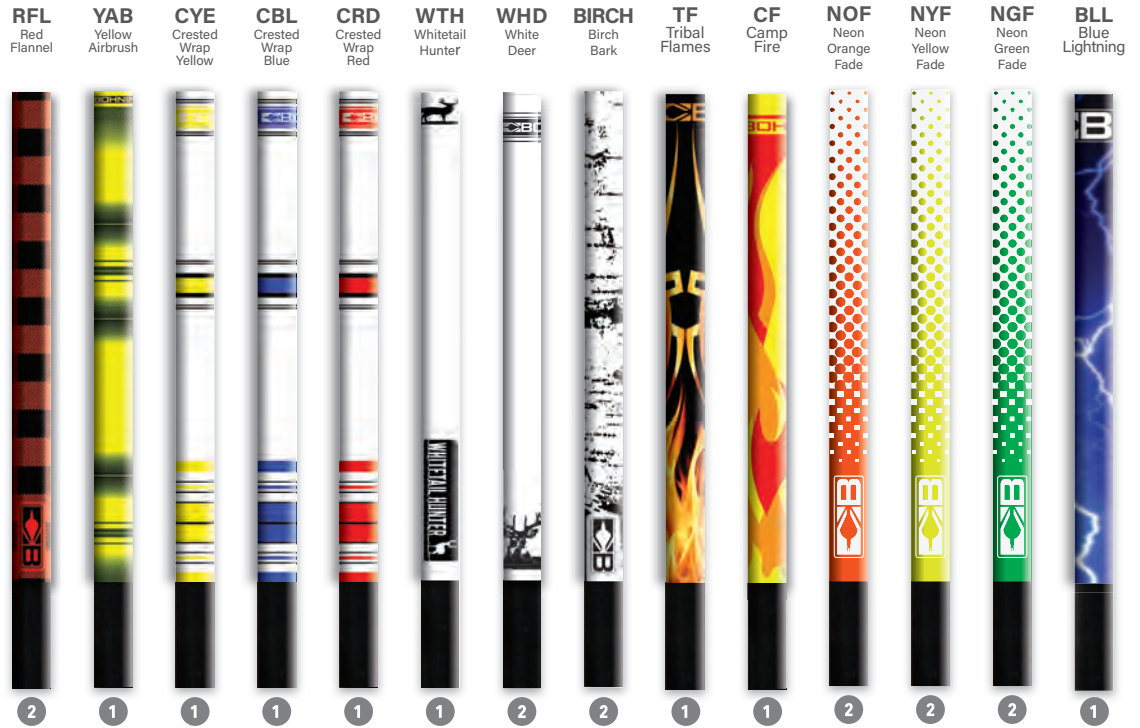

WEIGHT CODE (SEE TABLE PG. 16)

WRAP WIDTH:

See pg. 16 for fitting guide

XS

0.875in (22mm)

SMALL

1.00in (25mm)

STANDARD

1.125in (29mm)

LARGE

1.375in (35mm)

XL

1.50in (38mm)




WEIGHT CODE (SEE TABLE PG. 16)

The Lace wrap has a clear background with white ink.
The shaft color will show through.

MORE PATTERNS AND DESIGNS AVAILABLE ONLINE:



ARROW WRAPS



Bohning supports many archery initiatives throughout the world including youth archery, archery tournaments, archery organizations and many charities.

Again in 2025, Bohning will be taking a portion of the sales from the following projects and donating it to a local charity. If you want to help support these wonderful organizations please consider buying one of the following products. We will announce the organization we will donate to in December of 2025.

If you have an organization you would like to support contact us, we can work with you to produce custom stickers, wraps, and vanes.

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)


- 501031** — 4" Standard
- 501032** — 4" Small
- 501033** — 4" XS
- 501034** — 4" Large
- 501035** — 4" XL

5.5" WRAP (139.7 mm)


- 501071** — 5.5" Standard
- 501072** — 5.5" Small
- 501073** — 5.5" XS
- 501074** — 5.5" Large
- 501075** — 5.5" XL

7" WRAP (177.8 mm)

- 501051** — 7" Standard
- 501052** — 7" Small
- 501053** — 7" XS
- 501054** — 7" Large
- 501055** — 7" XL

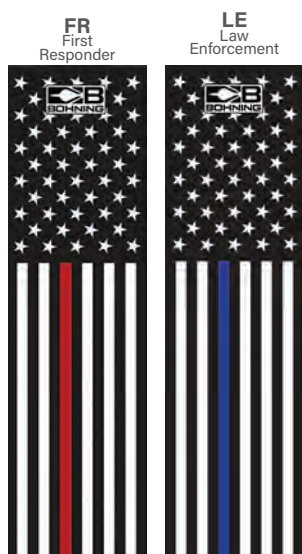


BOHNING CARES WRAP

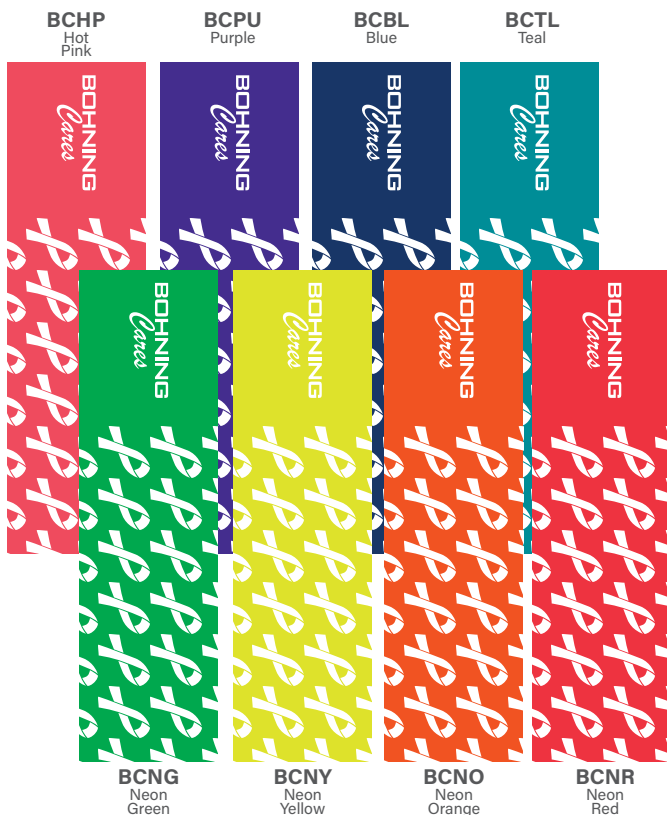


BLAZER VANE

- All Bohning Vanes are pre-primed. No vane prep needed.

- 10831** — 36 pk
- 10832** — 100 pk
- 10833** — 1000 pk




STIFFNESS: 6.0

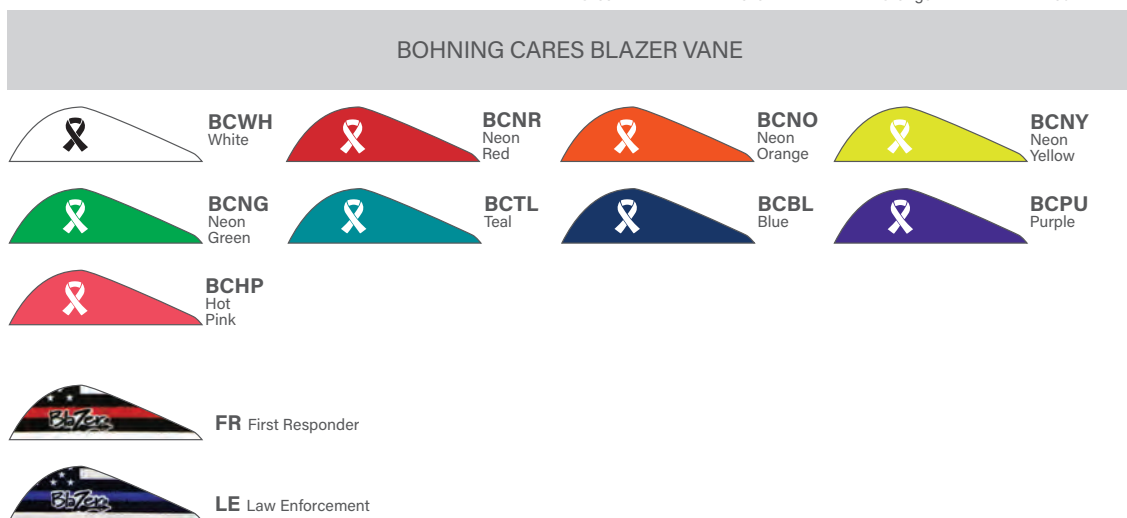

CUSTOM VANES AND WRAPS

TO ORDER OR FOR MORE INFO CALL: 231-229-4247 - email: custom@bohning.com

YOUR LOGO



CUSTOM VANES

YOUR LOGO



CUSTOM ARROW WRAPS

- Color options:
Any Profile Vane:- Solid colors only
- Order 1,000 vanes minimum (must be single color & vane profile)

- Color options:
— Wraps: All colors including patterns
- Order 50 wraps minimum



ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!

CUSTOM LOGO STICKERS

- Custom stickers with your logo or shop name
- Great for give-aways or for sale

CHOOSE YOUR STYLE and QUANTITY

- 8 Styles
- 100 Custom Stickers
- 300 Custom Stickers

HAVE A CUSTOM DESIGN? Call Us!
231-229-4247

STYLE 1 (CD1)



STYLE 2 (CD2)



NEW

STYLE 5 (CD5)



NEW

STYLE 6 (CD6)



STYLE 3 (CD3)



STYLE 4 (CD4)



NEW

STYLE 7 (CD7)



NEW

STYLE 8 (CD8)



Please email logo's for custom vanes, wraps, and decals in vector format files such as .ai – Adobe Illustrator files or .eps – Encapsulated Post Script Files . You must have permission to use the artwork given to Bohning for custom products. Bohning will not take responsibility for artwork that is copyrighted. Fees and fines could result from using imagery you do not have the proper license for.

We are happy to provide a quote upon request as long as the vane style and quantity, wrap size and quantity, custom decals and size are known.

** Bohning reserves the right to charge a \$36.00 design fee for vane logos or wraps that take an excessive amount of design time. This would never be charged without first informing the customer **

VANES

VANE MATERIAL, WHICH IS BETTER?

There is a lot of discussion on the type of vane material used in vane manufacturing today. At Bohning, we have two distinct vane materials for all of our vanes, AR1000 and AR1250. There are advantages to each.

The AR1000 is our original vane material that has been used on some of our most popular vanes of all time, like the Blazer. This material is our most durable, and forgiving, and will give you the most choices when deciding what glues to use to attach your vanes to your arrows. You can use either solvent-based glues like Fletch-Tite Platinum or instant glues like Blazer Bond and Fletch Fuse.

The AR1250 vane material is ultra stiff and many people will tell you they are the quietest vanes on the market. We recommend them for long distance shooting and for use in high-speed bows and crossbows. Vanes made out of AR1250 MUST use instant style glues for maximum adhesion. Solvent-based glues are not recommended for this material.

Every Bohning vane produced, in either material, is pre-primed and ready to adhere to your arrow. No cleaning or priming is needed, or wanted. Just clean your arrow and they will stick! #bohningvanesstick

AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever



AIR® VANE



ATLAS



BLAZER® VANE



BRONCO® VANE



X VANE®



ZEN® VANE

RECOMMENDED GLUE:

Fletch-Tite Platinum, Blazer Bond or Fletch Fuse

AR1250 Vane Material

Ultra Stiff - Quiet - Best for Long Distance & High Speed



ALPHA



BLACK SKY 2.0



HEAT VANE



X3® VANE

RECOMMENDED GLUE:
Blazer Bond or Fletch Fuse



NO PRIMER PEN IS NEEDED
FOR ANY BOHNING VANE! WE
DOUBLE-PRIME ALL OF OUR
VANES AT THE FACTORY.

WHICH WILL YOU CHOOSE?

WHAT VANE SHOULD I USE?

With all the Bohning vane styles available, it is sometimes difficult to decide which is the best for you. Bohning offers 20+ unique vane styles and profiles. We have created the table below to help you in your decision making. Our recommendations are based on aerodynamic properties of each vane and the arrow diameter used in the event listed. Keep in mind not everyone uses the same set-ups so the following should be used as a general guideline. Feel free to try out vanes for what you feel will work for your specific set-up. The choice is up to you! All Bohning vanes are the highest quality and come from our factory in Northern Michigan pre-primed twice, so there is no need to do anything to the vane prior to fletching them. All of our vanes are extensively tested for their specific uses and durability.

BOHNING VANE USAGE TABLE

BASED OFF OF ARROW DIAMETER TYPICALLY USED IN EVENT

Vane	Length	Material	Hunting	3D	Indoor	Fita/Field	Xbow	Recurve	Height	Weight	Stiffness
Air	2.0"	AR1000				🎯		🏹	0.30"	4.5gn	7.0
Alpha	2.8"	AR1250	🦌	3D	🏠		🏹		0.45"	8.5gn	8.6
Atlas	2.8"	AR1000	🦌	3D	🏠				0.45"	9.0gn	6.1
Black Sky 2.0	2.0"	AR1250	🦌	3D			🏹		0.53"	6.1gn	8.5
Blazer	2.0"	AR1000	🦌	3D			🏹		0.53"	6.1gn	6.0
Bronco	3.0"	AR1000	🦌		🏠			🏹	0.45"	8.5gn	6.2
Bronco	4.0"	AR1000			🏠			🏹	0.52"	12.5gn	5.7
Griffin	1.0"	AR1400						🏹	0.21"	1.2gn	3.5
Griffin 2"	2.0"	AR1400		3D		🎯			0.46"	6.2gn	4.5
Heat	2.5"	AR1250	🦌	3D					0.44"	6.1gn	9.0
X Vane	1.5"	AR1000		3D	🏠	🎯			0.35"	3.3gn	6.8
X Vane	1.75"	AR1000		3D	🏠	🎯			0.40"	4.3gn	6.6
X Vane	2.25"	AR1000		3D	🏠	🎯			0.36"	5.8gn	6.7
X Vane	3.0"	AR1000	🦌	3D	🏠		🏹		0.48"	10.0gn	6.1
X Vane	3.5"	AR1000	🦌	3D	🏠		🏹		0.49"	11.6gn	5.8
X3 Vane	1.5"	AR1250		3D	🏠	🎯			0.35"	3.3gn	9.3
X3 Vane	1.75"	AR1250		3D	🏠	🎯			0.40"	4.3gn	9.0
X3 Vane	2.25"	AR1250		3D	🏠	🎯			0.36"	5.8gn	9.0
X3 Vane	3.0"	AR1250	🦌	3D	🏠		🏹		0.48"	10.0gn	8.6
X3 Vane	3.5"	AR1250	🦌	3D	🏠		🏹		0.49"	11.6gn	8.8
Zen	4.0"	AR1000			🏠				0.37"	12.5gn	6.5

VANE SYMBOL LEGEND



HUNTING



3D



INDOOR



FITA/FIELD



CROSSBOW



RECURVE




WHY USE THIS VANE? (HUNTING, 3D, CROSSBOW, TARGET) The Alpha vane by Bohning is a design that combines stealth, speed and torque. The vane is made from our AR1250 material which is the stiffest and quietest material on the market. The unique profile with it's Advanced Torque Apex combined with the gradual taper of the vane towards the tail makes for an optimal balance of spin and stealth. We designed the rear of the vane to minimize vane flutter which has reduced noise and helped retain speed downrange. This new vane is perfect for hunting with either mechanical or fixed blade broadheads, 3D archery, crossbows, and indoor target events.

STEALTH + SPEED + TORQUE



- All Bohning Vanes are pre-primed. No vane prep needed.

101061 — 36 pk
101062 — 100 pk
101063 — 1000 pk

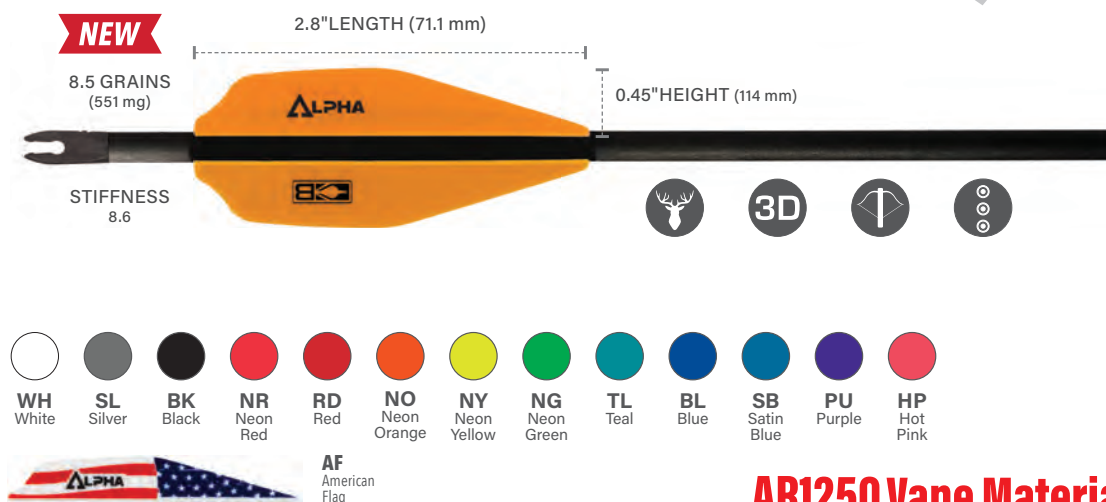

AR1250 Vane Material
Ultra Stiff - Quiet - Best for Long Distance & High Speed


WHY USE THIS VANE? (HUNTING, 3D, TARGET) The Atlas vane by Bohning is a design that combines maximum forgiveness, from the vane material, with excellent rotational torque, from our newest profile. If you love the Blazer vane, give this vane a try! You will be amazed at how well it performs. This vane will be taking trophy bucks and trophies in 3D and indoor target events for years to come! This vane is also our recommendation for NASP® competition arrows and youth set-ups.

DURABILITY + FORGIVENESS + TORQUE



- All Bohning Vanes are pre-primed. No vane prep needed.

101071 — 36 pk
101072 — 100 pk
101073 — 1000 pk

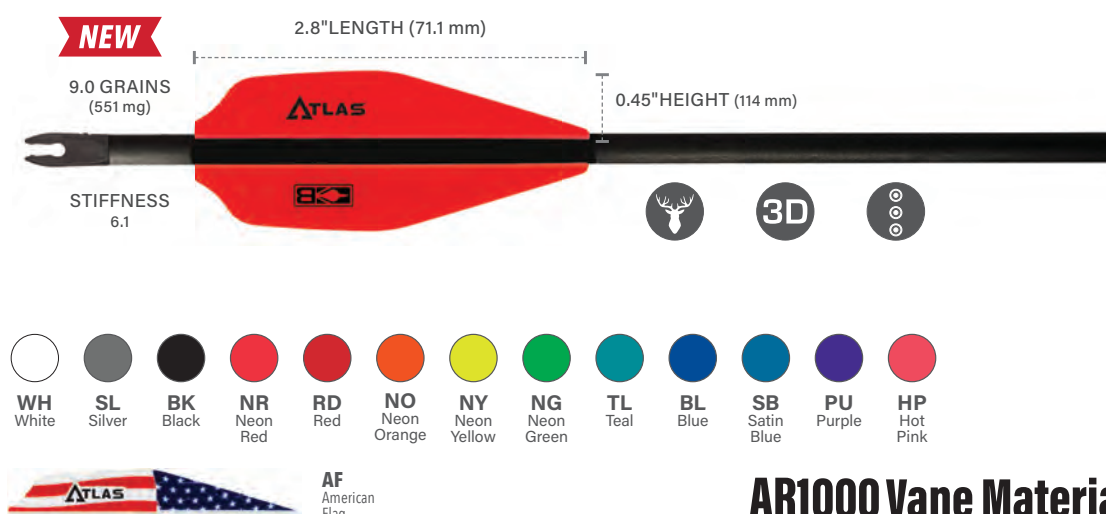

AR1000 Vane Material
Durable - Best Adhesion - Best Selling Vane Material Ever




WHY USE THIS VANE? (HUNTING, 3D, CROSSBOW) The Blazer vane has the perfect combination of the ability to steer an arrow, durability, and adhesion. This vane allows you to switch from your target point to a broadhead with no adjustments needed. This vane is built from our original AR1000 material which offers the highest level of durability and adhesion of any of our vanes. These are the reasons this vane is the **#1 sold vane in the world** and has been since 2005.

Blazer®

BLAZER® VANE

- All Bohning Vanes are pre-primed. No vane prep needed.

10831 — 36 pk
10832 — 100 pk
10833 — 1000 pk

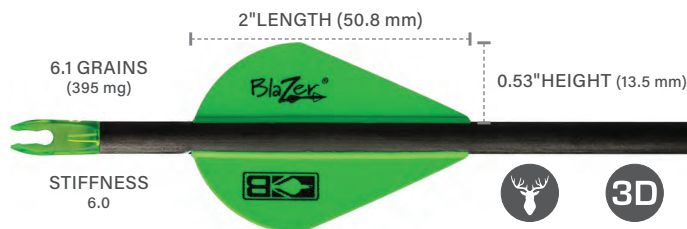


AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever

PRO TIP:


Made out of the ultra-durable AR1000 vane material. No Primer Pen Needed!



TRUE COLOR
BLAZER® VANE

- All Bohning Vanes are pre-primed. No vane prep needed.

10831 — 36 pk
10832 — 100 pk
10833 — 1000 pk

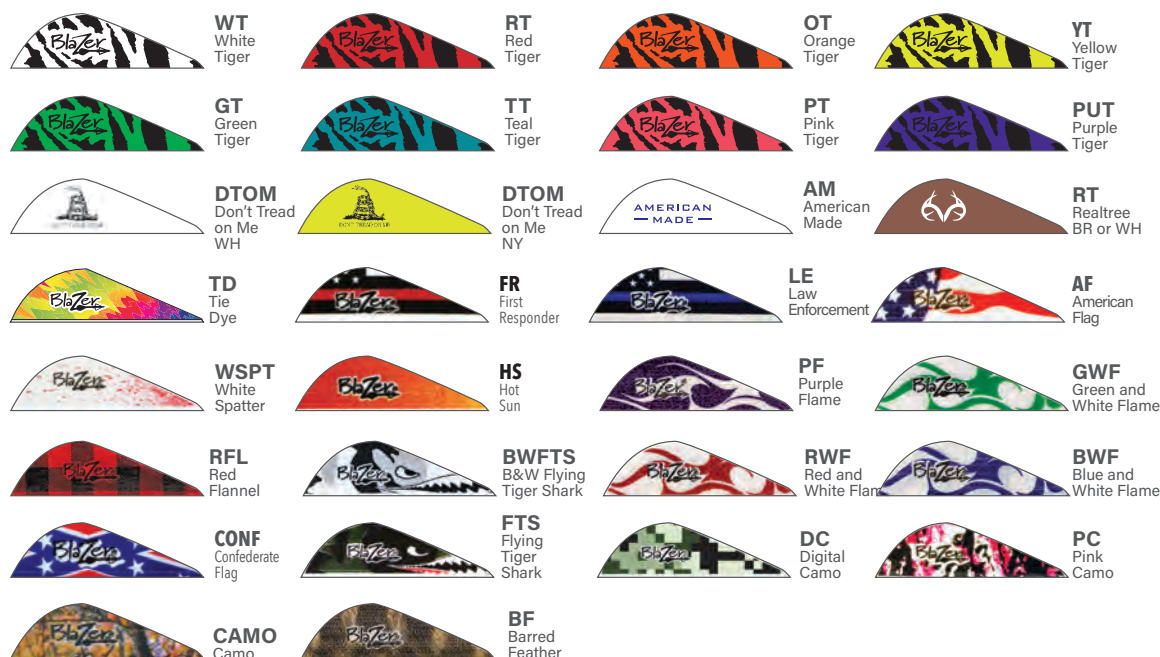

BLAZER®
COMBO PACK

- Includes:
 - 12 white Blazer® vanes
 - 24 color Blazer® vanes
- All Bohning Vanes are pre-primed. No vane prep needed.

101050 — 36 pk






BLAZER®
TRUEFLETCH

- Shrinks to Fit shafts 0.219" - 0.375"
(5.56 mm - 9.525 mm)
- Store in a cool place until use
- 5" in length (127 mm)
- Average weight: 27 grains (1.7 g)

101001 — 6 pk
101003 — 50 pk




STIFFNESS: 6.0



BLACK SKY
TRUEFLETCH

- Shrinks to Fit shafts 0.219" - 0.375"
(5.56 mm - 9.525 mm)
- Store in a cool place until use
- 5" in length (127 mm)
- Average weight: 36 grains (2.3 g)
- Low profile vane
- Stiffer and quieter vane material
- Ideal for high-speed crossbows & high-speed vertical bows

101002RD — 6 pk



STIFFNESS: 8.6

APPLY USING BOILING WATER!



TRUEFLETCH

WHY USE THIS PRODUCT?: Blazer TrueFetch is easy to install for emergency purposes in the backcountry or for everyday fletching! Slide TrueFetch over your prepared arrow shaft and submerge in boiling water. If you want your vanes to have a left or right helical, just rotate clockwise or counterclockwise in the boiling water when the arrow is submerged. Whether it is on your stove at home, over your campfire, or camp stove while hunting, you can have consistent easy to install vanes and wraps on your arrows.



101001WT

101001NO

101001NG

101001AF

101002RD

AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever

AR1250 Vane Material

Ultra Stiff - Quiet - Best for Long Distance & High Speed



WHY USE THIS VANE? (HUNTING, 3D, CROSSBOW) The Black Sky 2.0 vane is designed with high-speed bows and crossbows in mind. It has the same legendary profile as the Blazer vane but is manufactured with our ultra-stiff AR1250 material. This combination will give you unmatched ability to steer an arrow while being more rigid and quieter in flight. Try this vane out in your high-speed compound or crossbow and see for yourself.



BLACK SKY 2.0

- Blazer Vane profile
- Stiffer and quieter AR1250 vane material
- Ideal for high-speed rail-less crossbows
- All Bohning Vanes are pre-primed. No vane prep needed.

10901 — 36 pk
10902 — 100 pk
10903 — 1000 pk



NO PRIMER PEN NEEDED!

PRO TIP:
Blazer Bond or
Fletch-Fuse glues are
recommended for
this vane.

AF
American
Flag

AR1250 Vane Material

Ultra Stiff - Quiet - Best for Long Distance & High Speed



HEAT VANE

- Made out of the ultra-stiff AR1250 vane material for maximum arrow stabilization, arrow control, and quiet flight
- All Bohning Vanes are pre-primed. No vane prep needed.

101036 — 36 pk
101037 — 100 pk
101038 — 1000 pk



NO PRIMER PEN NEEDED!

PRO TIP:
Blazer Bond or
Fletch-Fuse glues are
recommended for
this vane.

AF
American
Flag

AR1250 Vane Material

Ultra Stiff - Quiet - Best for Long Distance & High Speed



X VANE®

- Made of AR1000 vane material
- All Bohning Vanes are pre-primed. No vane prep needed.

10771* — 36 pk

10772* — 100 pk

10773* — 1000 pk

*Specify length when ordering

WHY USE THIS VANE? The 3.0" and 3.5" X Vanes are excellent for Hunting, 3D, and Crossbow applications. Its .49" height allows for greater rotational torque and faster correction than lower profile vanes. This vane has become a mainstay at IBO, ASA, and TAC events. If durability and forgiveness are top on your list of things needed for a vane, these vanes are perfect for you. The 3.0" X Vane is also a great choice for Youth Competitions.



PRO TIP:
The 3.0" X Vane meets the requirements for NASP® Arrows.


NO PRIMER PEN NEEDED!



ALL BOHNING
VANES ARE:

**MADE IN
USA**

WHY USE THIS VANE? The Bohning X-Vane 2.25" is a perfect vane for hunting with mechanical broadheads, 3D, and various target applications. This vane is used in many situations in archery; small diameter vanes in hunting and 3D, FITA/Field Events, and indoor spots. The AR1000 material makes this an extremely durable vane that is easy to attach to any arrow.

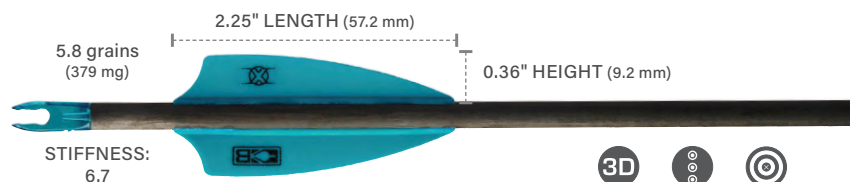

WHY USE THIS VANE? The 1.5" & 1.75" are sized for small diameter arrow shafts. Its low profile allows for optimal performance with crosswinds while maintaining a flatter trajectory over varied distances. This is a benefit for unknown distance competitions. The low profiles also provide for optimal clearance for recurve and traditional setups.



AF
American
Flag

AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever



X3® VANE

- Made out of the ultra-stiff AR1250 vane material for maximum arrow stabilization, arrow control, and quiet flight
- All Bohning Vanes are pre-primed. No vane prep needed.

101051* — 36 pk

101052* — 100 pk

101053* — 1000 pk

*Specify length when ordering

**PRO TIP:**


Blazer Bond or
Fletcher-Fuse glues are
recommended for
this vane.

NO PRIMER PEN NEEDED!ALL BOHNING
VANES ARE:**MADE IN
USA**

WHY USE THIS VANE? Born out of the need for stiffer material due to high-powered vertical and crossbows, the Bohning X3 3" & 3.5" vane is a perfect vane for Hunting, 3D, and Crossbow applications. Its .49" height allows for superior correction while maintaining a flatter trajectory over long distances. Because of the stiffer material, you will have less vane flutter and a quieter flight with the X3 vane and its AR1250 material.



WHY USE THIS VANE? This vane maintains an ultra-flat trajectory at high speeds, the Bohning X3 2.25" vane is a perfect vane for Hunting with mechanical broadheads, 3D, and various target applications. The AR1250 material ensures the quietest flight and least amount of vane flutter to keep your arrow at its highest velocity at the longest distances.

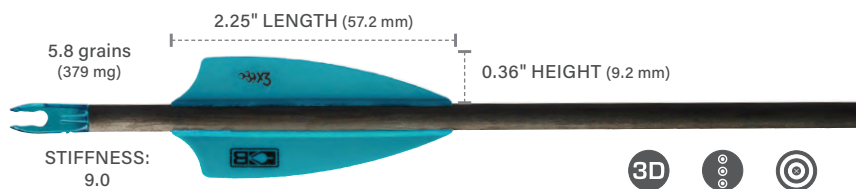

WHY USE THIS VANE? The 1.5" & 1.75" X Vane maintain an ultra-flat trajectory along with high speeds. Its low profile allows for optimal performance with crosswinds while maintaining a flatter trajectory over varied distances. This is a benefit for unknown distance competitions. The AR1250 material allows for less vane flutter which helps maintain downrange speed.

WH
WhiteSL
SilverBK
BlackNR
Neon
RedRD
RedNO
Neon
OrangeNY
Neon
YellowNG
Neon
GreenTL
TealBL
BlueSB
Satin
BluePU
PurpleHP
Hot
PinkAF
American
Flag**AR1250 Vane Material**

Ultra Stiff - Quiet - Best for Long Distance & High Speed



IT'S IN OUR VANES



STAFF SHOOTER
PEDRO AMPUERO
KAMCHATKA, RUSSIA




ZEN[®] VANE

- Made of AR1000 vane material
- Solves clearance issues when using large diameter shafts
- All Bohning Vanes are pre-primed. No vane prep needed.

101047 — 36 pk
101048 — 100 pk
101049 — 1000 pk

WHY USE THIS VANE? (INDOOR TARGET) The Bohning Zen Vane was developed specifically for Indoor Target Archery. Its low clearance height (.37") allows for clearance on tight setups with larger shafts (.25 and .27). This vane is 4 inches long providing the preferred surface area to stabilize large diameter arrows in short distances.

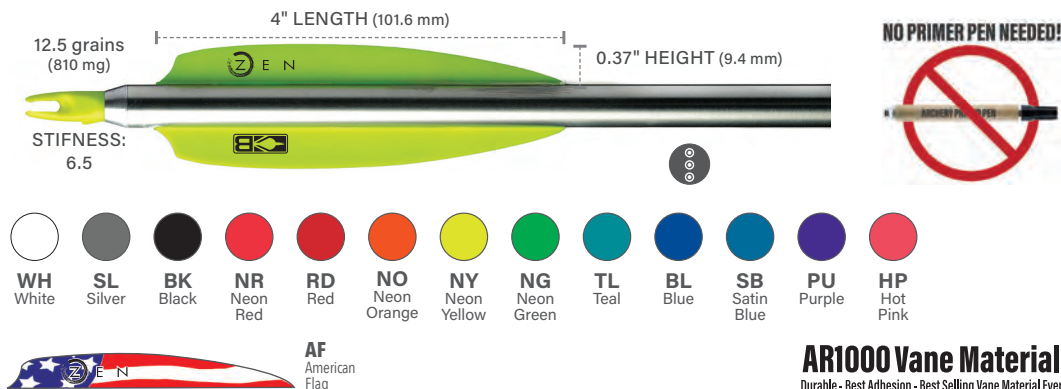


BRONCO[®] VANE

- Made of AR1000 vane material
- All Bohning Vanes are pre-primed. No vane prep needed.

10501* — 36 pk
10502* — 100 pk
10503* — 1000 pk

*Specify length when ordering

WHY USE THIS VANE? (HUNTING, INDOOR TARGET, RECURVE) The Bronco vane's long profile is similar to traditional feathers but with superior durability due to it being made from Bohning's AR1000 Vane Material. The 3" Bronco is usable in all youth competitions.

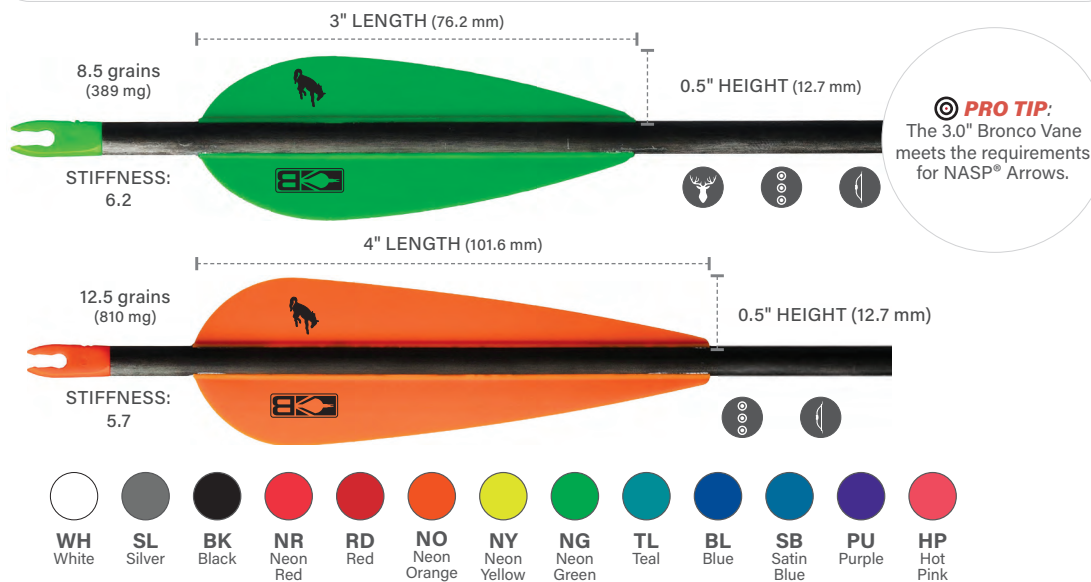

AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever


NO PRIMER PEN NEEDED!

AIR[™] VANE

- Made of AR1000 vane material
- All Bohning Vanes are pre-primed. No vane prep needed.

101026 — 36 pk
101027 — 100 pk
101028 — 1000 pk

WHY USE THIS VANE? (FITA/FIELD, RECURVE) The Bohning AIR Vane was developed with input from some of the best long-distance shooters in the world for FITA & Field. Its low clearance height (.3") and reduced surface area are ideal for minimizing crosswind drift. The aerodynamic leading edge provides a smooth profile resulting in low turbulence while maximizing speed retention.

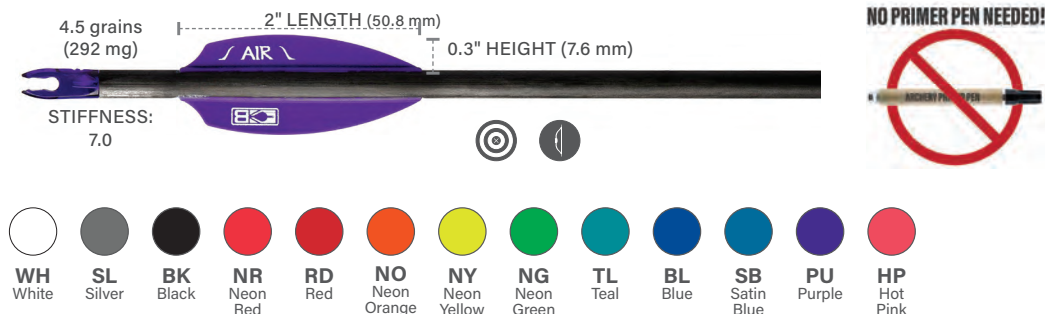

AR1000 Vane Material

Durable - Best Adhesion - Best Selling Vane Material Ever

VANES



GRIFFIN

MORE TIME SHOOTING, LESS TIME RE-FLETCHING

ENGINEERED FOR GREATNESS

1" GRIFFIN VANE

- For Olympic recurve and compound using micro-diameter arrows
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation — spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs
- All Bohning Vanes are pre-primed. No vane prep needed.

101055* — 40 pk

*Specify length when ordering




2" GRIFFIN VANE

- Twisted ribbon design for compound bows
- The most innovative vane since the Blazer Vane!
- Designed to set you apart from the crowd
- Built in Helical - Allows for straight fletching
- Provides superior rotation of the arrow
- Durable injection molded vane
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs
- All Bohning Vanes are pre-primed. No vane prep needed.

101055* — 40 pk

*Specify length when ordering

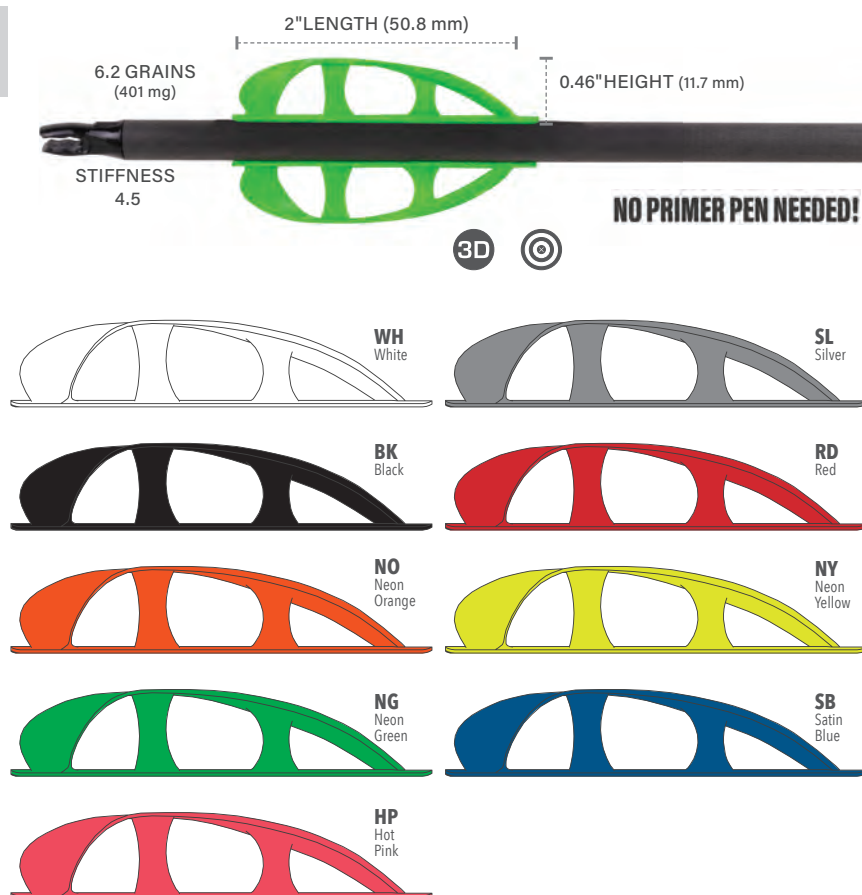

CROSSBOW PRODUCTS

BRUIN AND LYNX® QUIVERS Details on page 36



TOP MOUNT



- Parallel quiver mounting system
- Installs easily to the right or left side of the sight rail without removing the scope
- Slim and adjustable design allows for easy access to arrows and reduction in forward weight of crossbow
- Includes both allen head and thumb screw

801012 - Crossbow Top Mount

MULTI-FLETCHER®



- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Capable of fletching crossbow bolts up to 0.42" (10.7 mm) OD
- Can fletch 1° to 3° right, 1° to 3° left, or straight
- See page 5 for more information

601055 — Multi-Fletcher®


CROSSBOW NOCK



11.0 grains (713 mg)

Fits .300" Shaft
Half Moon Nock (7.70 mm)

- 401008 — 12 pk
- 401009 — 100 pk
- 401010 — 1000 pk



WH White BK Black RD Red NO Neon Orange NY Neon Yellow NG Neon Green

CROSSBOW BOLT/ARROW WRAP



Most crossbow users do not fletch their own bolts. We have designed these reflective wraps to be put on after the arrow has been fletched! They are sized to fit the standard large diameter bolts.

501013 - 6 Pack Crossbow Bolt/Arrow Wraps



XCCELERATOR WAX®



- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

1365 — 0.51 oz tube (14.5 grams)

BULK OPTIONS:

- 1634 — 16 tubes
- 1634BOWL - Bowl & 16 pk
- 1365-250 - 250 tubes

LIGHTNING LUBE™



- Silicone-based, odorless rail lube
- No-mess foam applicator
- Provides a protective film for reduced friction and increased velocity

1363 — 1.18 oz (35 ml) tube

- 941019 — 16 pk bulk
- 941019BOWL - Bowl and 16 pk
- 1363-250 - 250 Tubes

CROSSBOW LUBE KIT

- Includes:
 - 1 tube of Lightning Lube — 1.18 oz (35 ml)
 - 1 tube of Xccelerator Wax — 0.51 oz (14.5 grams)

801005

CROSSBOW SERVING THREAD



- Designed for high performance crossbow strings
- 0.030" (0.76mm)
- Contains 45 yards (41.1 m)

801011BK— 0.030" (0.76mm)

YOUTH ARCHERY

🎯 **PRO TIP:** Archery is a game of inches. Give your youth archer the best chance for consistency and repetition with Bohning's jigs, vanes, and points. Bohning's Fletching jigs and adhesives will make fletching and re-fletching easy and repeatable. The Bohning 2.8" Atlas Vane, 3.0" X Vane and 3.0" Bronco Vane are Bohning's recommendation for all youth tournament competitors, including NASP® and S3DA®. All of these vanes are made with Bohning's exclusive AR1000 material which is soft enough not to affect simple arrow rests, and is pre-primed for easy installation and maximum adhesion.

YOUTH COACH TOOL KIT

Everything a coach needs to fletch and refletch youth arrows. We have included our 3-vane advanced fletching jig, the Cauldron. We also include our best-in-class Strip Pro vane and wrap remover along with SSR which cleans oils and adhesives from your arrow to ensure the best possible adhesion of vanes. We include our bow square for bow set-up, and Ferr-L-Tite to attach points, and 1 oz Blazer Bond to attach vanes. With this package you will be ready for the season!

- Cauldron Student Edition (1.5 degree right insert only)
- Strip Pro
- Bottle of SSR
- Bow Square
- Ferr-L-Tite Hot Melt
- Blazer Bond 1oz

🎯 **PRO TIP:**
The Cauldron Jig fletches 3 vanes at once with perfect indexing.



COACHKIT - Youth Coach Tool Kit

YOUTH/PARENTS TOOL KIT

Everything a youth archer or parent needs to fletch and refletch youth arrows. We have included compact, foldable fletching jig, the Frontier Jig. We also include our best-in-class Strip Pro vane and wrap remover along with SSR which cleans oils and adhesives from your arrow to ensure the best possible adhesion of vanes. We include Ferr-L-Tite to attach points and 0.5 oz Fletch Fuse to attach your vanes. With this package any parent or youth archer can fletch or repair their own arrow!

- Frontier Student Edition (1.5 degree right insert only) (Easy to use)
- Strip Pro
- Bottle of SSR
- Ferr-L-Tite Hot Melt
- Fletch Fuse 0.5 oz

🎯 **PRO TIP:**
The Frontier Jig fletches 1 vane at a time but folds flat for easy re-fletching at tournaments.



PARENTKIT - Youth/Parent Tool Kit

🎯 **PRO TIP:**

Want to have custom vanes and wraps for your youth archery team? Contact us for more information!
info@bohning.com

🎯 **PRO TIP:**

Want an easy fundraising project for your team? See our Arrow Pen Kits on Page 41.

YOUTH ARCHERY



2.8" ATLAS VANE




3" X VANE




3" BRONCO VANE


After extensive testing Bohning is recommending the 2.8" Atlas Vane for youth archery set-ups. Fletched at 1.5 degree this vane will fly true even at low speeds. The AR1000 material is soft enough to not damage rests and is resilient enough to perform for a complete season. Other vane options that comply with NASP® rules are the 3" X Vane and 3" Bronco Vane.

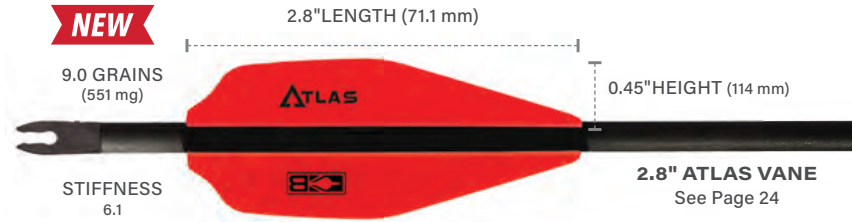

2.8" ATLAS VANE
See Page 24

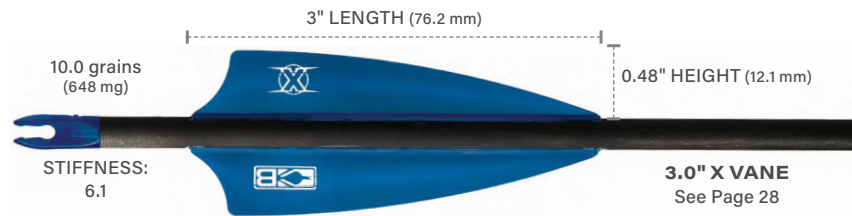

3.0" X VANE
See Page 28

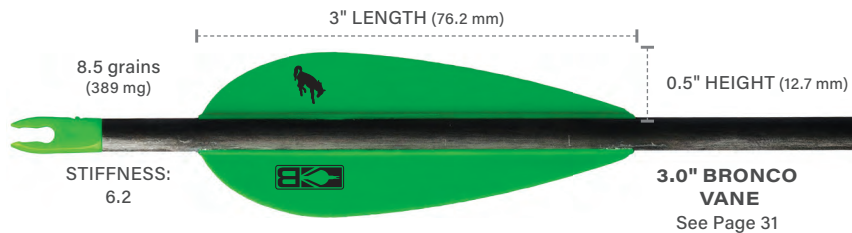


3.0" BRONCO VANE
See Page 31



THE STRIP-PRO

- Strips your arrow shaft of all fletchings, glue and arrow wrap
- See Page 46 for details

1524 — Strip-Pro
801026 — Blades: 3pk



BOW SQUARE

- See Page 46 for details

801028



SSR

- See Page 46 for details

801052 — Single-use pk
- 1 tsp (4.9 ml)
801053 — Shaker bottle -
2.65 oz (78.4 ml)




SLIP-ON ARMGUARD

- Durable, yet flexible, and soft compression-fit material
- Easy on and off; protects the entire forearm
- Internal wear guard for a sleek design.

801009

COLOR CHOICES



SLIP-ON ARMGUARD SIZING (APPROXIMATE)

SIZE	LENGTH	SMALL END RELAXED	LARGE END RELAXED	SMALL END STRETCHED	LARGE END STRETCHED
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)
M	9" (22.9 cm)	7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)



BLACK SKY™
ACCESSORY POUCH

- See Page 38 for details

701040BK



BLACK SKY™
YOUTH TUBE
QUIVER

- See Page 38 for details

701029BK



BLACK SKY™

YOUTH BOW CASE

- See Page 38 for details

701036BK

QUIVERS

BRUIN

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with the Lever-Lock mounting system
- 2" (5 cm) vertical adjustment to fit your bow/crossbow perfectly

201030 — Indicate hood and liner color

HOOD COLOR CHOICES



BK
Black



CF
Carbon
Fiber



MOC
Mossy Oak®
Break-up
Country



KH
Kryptek®
Highlander



RE
Realtree®
Edge

LINER COLOR CHOICES



BK
Black



RD*
Red


* Red liner available only
with black or carbon
fiber hoods

**MADE IN
USA**

FITS ALL
ARROW
SIZES

2" (5 CM)
ADJUSTMENT

201030KH

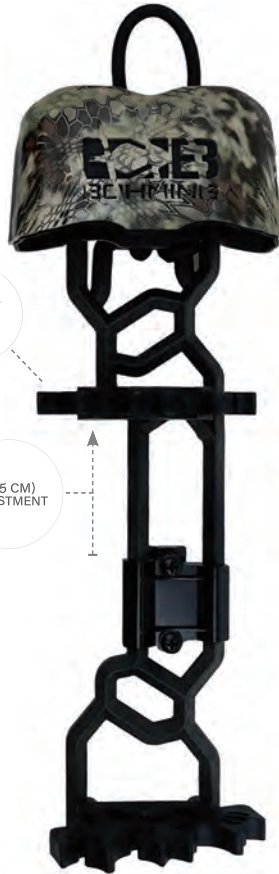

**CROSSBOW
COMPATIBLE**

201030BKRD



201030BKBK



201030CFRD



201030CFBK



201030MOC



201030RE



LYNX®

- Dual-retainer quiver
- Molded hood and liner for quiet storage of any broadhead style
- Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

1038 — Black

201013RE — Realtree Edge®

201013MOC — Mossy Oak® Break-Up Country

HOOD COLOR CHOICES



BK
Black



RE
Realtree®
Edge



MOC
Mossy Oak®
Break-up Country

**MADE IN
USA**

201013MOC



**CROSSBOW
COMPATIBLE**

1038



201013RE



LEVER LOCK

- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click)

1073 — Lever Lock

QUIVERS

3-IN-1 SLING QUIVER

- Protects bow, arrows, strings, cables, and sight
- Fits bows from 28" to 40.5" total length (not ATA)
- Waterproof and quiet materials
- Includes 4 arrow Bruin Quiver attached to the Sling
- Includes a heavy-duty hoist rope and handle
- Arrow restraint to keep arrows safe
- Multiple storage pockets

701080BK - Sling Quiver

The new, patent-pending **3-in-1 Sling Quiver** is designed to get your equipment from the vehicle to the stand while protecting your strings, cams, cables and sight. The sling has our **Bruin Quiver** mounted to it. Once you are at your stand, the hoist rope allows you to get your equipment into the stand with a minimum of fuss.



Protects bow, cams, strings, cables, and sight from the car to the stand. Waterproof, silent, neoprene bow sling makes carrying your bow through the roughest terrain easy.



Includes a heavy-duty hoist rope and handle to get your bow into the stand. Hoist rope can be used to tie off the sling to the tree once in your stand for easy access to your arrows.



Our 4 arrow quiver mounts on the sling so there is no need to attach to your bow or remove it once in your stand.

POCKET QUIVER

- Dimensions: 3.75" x 5.125" x 1.25" (95 mm x 130 mm x 32 mm)
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Made in USA

201035BK - Pocket Quiver
201035BK-10 - 10 Pack

Replacement Parts
201036BK - Body
201037BK - Clip
201038 - Retainer Cap

MADE IN USA



Securely holds 6 arrows or bolts

POCKET QUIVER SNAPFIT DISPLAY

Order 12 Pocket Quivers and receive a free SNAPFIT table top display. Great for impulse point of purchase buying

201035BK-12SF



BOW CASES



ADULT BOW CASE

- Dimensions: 44.5" (113 cm) x 19.5" (50 cm)
- Fits bows up to 37" (94cm) axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura® Nylon



Large zippered interior mesh pocket

ADULT BOW CASE INTERIOR - COLOR MAY VARY

Interior dimensions: 43.5" x 18" (110.5 cm x 45.7 cm)

701037BK



YOUTH BOW CASE

- Dimensions: 40" (102 cm) x 15.8" (40cm)
- Fits most youth bows (including Genesis™)
- Outer arrow storage pocket and 3 zippered interior pockets



YOUTH BOW CASE INTERIOR

Interior dimensions: 38" x 15" (96.5 cm x 38.1 cm)

701036BK



ADULT TARGET QUIVER

- 4 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 standard sized arrows
- 2 zippered storage compartments:
- Easy to access mesh and pencil storage areas
- Constructed with premium Cordura® and Ripstop nylons
- Superior durability and water repellent
- Fits up to 3" (7.5 cm) belt



ACCESSORY POUCH

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant
- Strong and comfortable belt Loop - Fits up to 2.5" (6 cm) belt



TUBE QUIVER

- Dimensions: 19" (48 mm)
- 2 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 STD sized arrows
- Ambidextrous
- Mesh storage pocket

701029BK

701041BK



Arrow Tubes: 17" (43 cm) long - 1.2" (3 cm) I.D.
Main Pocket: 1" (28 cm) x 5" (13 cm)
Upper Pocket: 4.5" (11 cm) x 5" (13 cm)



Dimensions:
6.25" (16 cm) Width
5.75" (15 cm) Height
3.5" (9 cm) Depth






(2) Arrow Tubes: 18"+ (457 cm) long - 1.2" (30 cm) I.D.

**8 COLORS AVAILABLE
TO MATCH ANY BLIND**

COVERTECH

HD WINDOW CAMO

**YOU CAN SEE THEM
THEY CAN'T SEE YOU!**



**NOW
AVAILABLE IN
24" X 59" SHEETS**

CoverTech is made with a new, micro-perforated, and high definition material that is like looking through a screen or tinted window. It no longer strains the eyes like the old style material. CoverTech is printed on one side in High Definition Graphics which helps to break up your silhouette inside your blind.

- High Definition printed/pattern exterior
- Black micro-perforated backing
- One-way graphics

502099 - (1 pc.) 24"x59"
502000 - (1 pc.) 14"x36"
502000-3 - (3 pc.) 14"x36"

**MADE IN
USA**



SHOOTER STOOL

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

701058BK — Stool with arrow tubes/umbrella holder

701055BK — Stool only



PRO TIP:

**STOOL CAPACITY:
300 pounds
(136 kg)**



ACCESSORIES

3-STRAP ARMGUARD



- Made of heavy-duty Cordura — double stitched to prevent fraying
- Protects arm and holds loose clothing away from bow strings
- Adjustable quick disconnect buckle straps

1689



SLIP-ON ARMGUARD

- Durable yet flexible and soft compression-fit material
- Internal wear guard for a sleeker design.
- Easy on and off; protects the entire forearm

801009

COLOR CHOICES




PU Purple **HP** Hot Pink **RD** Red **BL** Blue **BK** Black **CAMO** Camo

SLIP-ON ARMGUARD SIZING (APPROXIMATE)

SIZE	LENGTH	SMALL END RELAXED	LARGE END RELAXED	SMALL END STRETCHED	LARGE END STRETCHED
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)
M	9" (22.9 cm)	7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)

D-FLECTOR ARMGUARD

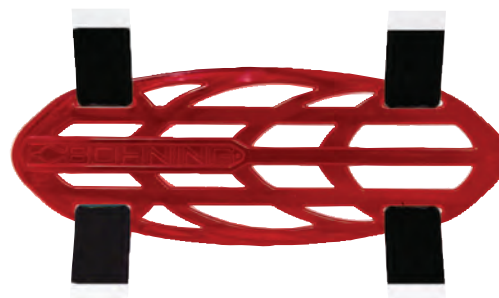

- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center

801092

SOLID COLOR CHOICES



NY
Neon
Yellow

WH
White

BK
Black

TRANSLUCENT COLOR CHOICES



TL
Teal

PU
Purple

RU
Ruby

TG
Tangerine



KW
Kiwi



EB
Electric
Blue



RS
Rose
Pink

WIND CHECK

BOW GRIP/SIGHT WINDOW PAD



- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy one-hand use

1612 — 0.21 oz (6 grams)

- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak® Break-Up Infinity

1602 — 2 Pads

ACCESSORIES

BROADHEAD WRENCH



- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point
- Color may vary

1619



ARROW LUBE



- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based
- Available in a fishbowl display

301023 — 1.18 oz (35 ml)

BULK OPTIONS:

301023-16 - 16 Tubes

301023-250 - 250 Tubes

301023BOWL - Bowl + 16 pk

UNIVERSAL ARROW BOX



- Each box holds 12 arrows, up to 36" (91 cm)
- Dimensions: 36.5" x 6" x 2.5" (93 cm x 15 cm x 6 cm)

1623 — 50 pk


CUSTOM STICKERS FOR ARROW BOX



- 50 Custom stickers, with your logo that fit on the universal arrow bow.
- 50 End Sticker for arrow information.

1623STICKER — 50 pk

"BOA" AND "PYTHON" ARROW PADS



- Boa holds 12 arrows of any size
- Python holds 12 arrows Sizes .219" (5.56 mm) to .359" (9.12 mm)

16092 — Boa (1 Pad)

801047 — Python (1 Pad)

ARROW PEN FERRULES



PRO TIP:

Our Arrow Pen Ferrules easily turn a broken arrow piece into a product you can sell or an advertising tool.



- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to Bic® Cristal (not included)

990004BK

ARROW PEN KITS

AVAILABLE TO SCHOOLS AND CLUBS ONLY!

GREAT FOR FUNDRAISING!



APKIT1 - Arrow Pen Kit 1 Includes:

- 110 pk black ferrules
- 100 pk Bic® Pens to match our ferrules
- 100 Standard width 8" Arrow shafts.
- 1 - 0.50 oz bottle of Fletch Fuse instant adhesive

Vanes, Wraps, & Nocks Included to Complete:

- 40 American Flag Pens
- 30 Green Fade Pens
- 30 Hot Sun Pens

APKIT1 - Arrow Pen Kit 1



APKIT2 - Arrow Pen Kit 2 Includes:

- 110 pk black ferrules
- 100 pk Bic® Pens to match our ferrules
- 100 Standard width 8" Arrow shafts.
- 1 - 0.50 oz bottle of Fletch Fuse instant adhesive

Vanes, Wraps, & Nocks Included to Complete:

- 40 Tie Dye Pens
- 30 Purple Flame Pens
- 30 Orange Tiger Pens

APKIT2 - Arrow Pen Kit 2

Want these with custom vanes and custom wraps? Contact us at custom@bohning.com

STRING ACCESSORIES

BOHNING PEEPIT PRO⁺ PROFESSIONAL PEEP SITE / CLARIFIER KIT

- Get the clearest site picture possible
- Easy to use serve-less design eliminates the need to serve in the peep
- Saves time and money
- 3 optically perfected clarifier lenses
- Kit comes with:
 - Peep It Pro
 - 6 Apertures
 - 3 Clarifier Lens
 - 2 Set-Screws
 - Set Screw Tool
 - Plunger Suction Cup (for installation)
- Available in 3 colors
- Available in 37° or 45° (see table below)
- Made in the USA

802050BK37 — Black Peep It 37°

802050BK45 — Black Peep It 45°

802050BL37 — Blue Peep It 37°

802050BL45 — Blue Peep It 45°

802050RD37 — Red Peep It 37°

802050RD45 — Red Peep It 45°

PEEP IT PRO CLARIFIER KIT REPLACEMENT PARTS AND ADDITIONAL LENSES

PART #	DESCRIPTION
802052-1/32	Biasing Aperture 1/32
802052-3/64	Biasing Aperture 3/64
802052-1/16	Biasing Aperture 1/16
802052-3/32	Biasing Aperture 3/32
802052-1/8	Biasing Aperture 1/8
802052-5/32	Biasing Aperture 5/32
802053GD05	Clarifier Lens Gold 0.5
802053YE10	Clarifier Lens Yellow 1.0
802053BL15	Clarifier Lens Blue 1.5
802053GR20	Clarifier Lens Green 2.0
802053RD30	Clarifier Lens Red 3.0
802054	Peep it Plunger Suction cup
802055	Peep It Plunger .130" Set Screw
802056	Peep It Plunger .200" Set Screw
802060	Peep It Pro Set Screw Tool



PRO TIP: WHAT IS A CLARIFIER?


A clarifier lens is used in your peep when using a magnification lens in your front sight. This "clears up" the target while minimizing the fuzziness on the pin at full draw giving you the sharpest site picture possible.



COLOR CHOICES



USE THIS TABLE TO CHOOSE 37° OR 45° PEEP IT

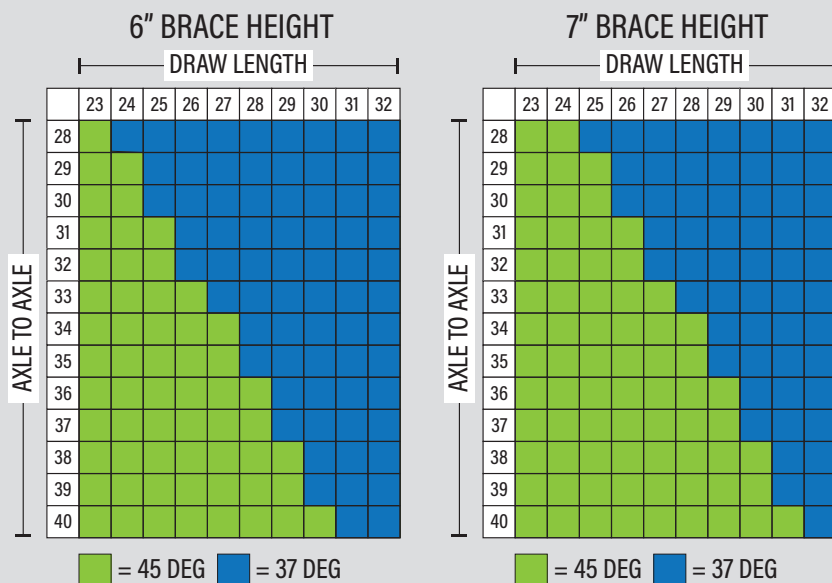

STRING ACCESSORIES

SERVE-LESS PEEP IT®

- Serve-less peep site
- Time saver installs without serving
- Durable construction
- Made in USA

SERVE-LESS PEEP IT

802002 — 1/8"*
802003 — 3/16"
802004 — 7/32"
802005 — 1/4"

WITH ALIGNER*

802006 — 3/16"
802007 — 7/32"
802008 — 1/4"

THREADED*

802009 — 1/8"
802010 — 1/4"

SERVE-LESS PEEP IT 24 PACK

802012 — 1/8"*
802016 — 3/16"
802014 — 7/32"
802015 — 1/4"

WITH ALIGNER - 24 PACK*

802026 — 3/16"
802027 — 7/32"
802018 — 1/4"

THREADED - 24 PACK*

802019 — 1/8"
802011 — 1/4"

* available in black (BK) only

CONVERSION CHART

1/8"	0.125"	3.18 mm
3/16"	0.187"	4.76 mm
7/32"	0.218"	5.54 mm
1/4"	0.250"	6.35 mm

COLOR CHOICES



BK
Black



RD
Red



OR
Orange



LM
Lime
Green



BL
Blue



PU
Purple



PK
Pink

WITH ALIGNER



BK
Black

THREADED



BK
Black



PRO TIP:

PERFECTLY ALIGNED FOR A CLEAR SIGHT PICTURE.
 The Peep It® stays in place even better than a standard tied-in peep sight. It is also available as a Threaded Peep It, which accepts clarifiers, verifiers, and Peep It with aligner.

SERVE-LESS ANCHOR KNOT

- Serve-less cable attachment for drop away rest cord
- Time Saver
- Durable construction
- Made in USA

802001 — Anchor Knot

802017 — 24 Anchor Knots



BK
Black



RD
Red



BL
Blue



PK
Pink

color choices



PRO TIP:

INSTALL A PEEP SIGHT IN 10 SEC
 Bohning's Serve-less Peep It® and Anchor Knot are huge time savers because you don't need to serve them.
 No more accidentally cutting or burning your bowstring during the peep removal process!

STRING ACCESSORIES



SOFT-FLEX KISSER BUTTON

The new Soft-Flex Kisser button by Bohning is a split ring design that is made out of a durable yet flexible material that is comfortable to shoot. You do not need to remove your string to install the kisser button up. The softer material helps eliminate string noise and vibration. Available in a variety of colors to match your bow.

- Helps maintain a consistent anchor point every shot
- Flexible yet durable material. 0.5" (12.7 mm) diameter
- Split design for easy installation with 2 enclosed clips

1665 — Kisser w/ clips



KISSER BUTTON

- Helps maintain a consistent anchor point for every shot
- Lightweight and durable, 0.5" (12.7 mm) diameter
- Easy installation with 2 enclosed clips

1664 — Kisser w/ clips
801081 — 100 pk



"SLIM" PEEP

- Durable, high-impact and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm) tubing, bulk peeps do not

1668 — Peep with tube
1640 — 50 pk (peep only)
1641 — 50 pk (tube only)
1' pieces (305mm)



STRING WHISKERS

- Two pieces per package, 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

1051 — 1 Pair
1635 — 50 Pair



PRO TIP:

String Whiskers reduce vibration in your bow's string, reducing the noise created when shooting your bow. They can also be used as a way to judge wind speed and direction!



STRING NOCKS

- Creates a positive nocking point for consistent shots
- Quick and easy to install

Hunter (black liner):
for 12-14 strand strings
—5.4 grains (350 mg)

Cam (red liner):
for 16-18 strand strings
—7.4 grains (480 mg)

Cam String Nocks
1065 — 6 pk
1068 — 100 pk
1071 — 1000 pk

Hunter String Nocks
1064 — 6 pk
1067 — 100 pk
1070 — 1000 pk



STRING SEPARATOR

- Fast and easy installation of serving, peeps, silencers, etc.
- Easily inserts into strands without damaging, twist into separate strings
- 2" (50.8mm) x .625" (15.87mm) x 1" (25.4mm)

1601 — Separator



SERVING



POWERGRIP

- A blend of tightly braided Spectra and nylon yarn
- Resin coated for durability and good grip
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)
Contains 50 yards (45.7 m)

801034 — 0.021" (0.53mm)

801035 — 0.025" (0.64mm)



NYLON SERVING THREAD

- Traditional nylon serving thread
- Use for end serving, peeps and nocks
- 0.018" (0.46mm)
Contains 90 yards (82.4 m)

1616 — 0.018" (0.46mm)



CROSSBOW SERVING THREAD

- Designed for high performance crossbow strings
- 0.030" (0.76mm)
Contains 45 yards (41.1 m)

801011BK — 0.030" (0.76mm)



#62 BRAID SERVING THREAD

- Braided for superior grip and durability
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)
Contains 60 yards (54.9 m)

1626 — 0.021" (0.53mm)

1627 — 0.025" (0.64mm)



HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" (0.36mm) white turns clear when served tightly
- 0.014" (0.53mm)
Contains 120 yards (109.7 m)
- 0.021" (0.64mm)
Contains 75 yards (68.6 m)
- 0.024" (0.64mm)
Contains 45 yards (41.1 m)

801031 — 0.014" (0.36mm)

801032 — 0.021" (0.53mm)

801033 — 0.024" (0.61mm)

COLOR CHOICES



WH
White

NO
Neon
Orange

NG
Neon
Green



BL
Blue

RD
Red

BK
Black




#62 XS SERVING THREAD

- 20% stronger than regular serving thread
- 0.018" (0.46mm)
Contains 100 yards (91.4 m)
- 0.021" (0.53mm)
Contains 75 yards (68.6 m)

801001 — 0.021" (0.53mm)

801010 — 0.018" (0.46mm)

COLOR CHOICES



BK
Black

RD
Red

NG
Neon
Green



LOOP ROPE

- 0.196" (2.0 mm) BCY #24 polyester D-loop rope

801002 — 39" (1m)

801003 — 100 ft (30.5m)

COLOR CHOICES



BK
Black

RD
Red

NG
Neon
Green



SERVE-TITE

- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- No thread included

16150 — Tool Only



TOOLS



THE STRIP-PRO

- Strips your arrow shaft of all fletchings, glue and arrow wrap
- New and improved handle for better grip/ease of use.
- Safe for all arrows/diameters
- Extra blade storage in Handle
- Replacement blades available



1524 — Strip-Pro

801026 — Blades: 3pk



SSR

- Concentrated cleaning powder removes dirt, grease, residue and contaminants
- For carbon, aluminum and fiberglass shafts
- Use on a scour pad with hot water to scrub, then rinse

801052 — Single-use pk - 1 tsp (4.9 ml)

801053 — Shaker bottle - 2.65 oz (78.4 ml)

🎯 PRO TIP

TO REMOVE FLETCHINGS:


Use the "Strip-Pro" by Bohning to strip the fletchings from arrow shafts. Clean with SSR powder on a scour pad to prepare for new fletching.

🎯 PRO TIP:

3 WAYS TO REMOVE WRAPS:

1. Use the "Strip-Pro" to remove the wrap.
2. Use a hair dryer to soften the adhesive and peel the wrap.
3. Use boiling water to soak the wrapped arrow shafts in and peel the wrap off once softened.

To remove remaining wrap adhesive, use SSR powder on a scour pad in hot water to scrub off.

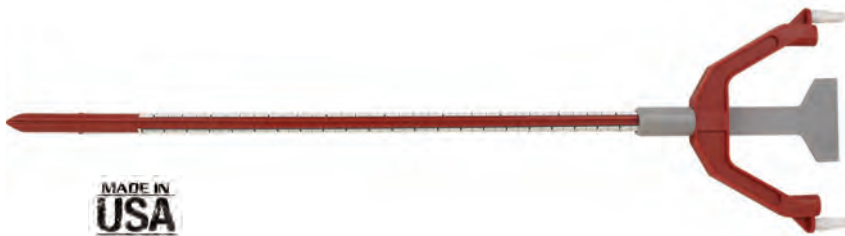


BOW SQUARE

- No more having to guess or clip and unclip the bow square continuously to ensure the loop is in the correct place! Simply slide the indicator back and forth as needed to start and finish your D-loop or nock sets.
- Easy to read brace height measurements
- Use your own nocks for the most accurate fit possible
- Use the flat side to check cam lean of your bow

801028



MEASURE BRACE HEIGHT



CAM ALIGNMENT



D-LOOP SET-UP



CAM MEASUREMENT

REVOLUTION ARROW CRESTER

NEW

- The kit includes:
 - One crester (made with wood base)
 - Four paint brushes:
 - Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with English and metric doubles as pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V



801080 — Cresters with Brushes

801080INT — Cresters with Brushes - International

REDESIGNED FOR 2025!

New compact motor module. Better spin on arrow shaft due to redistributed weight.
Improved longevity - Fewer wires

CRESTING BRUSHES



These fine grade brushes have a varnished handle, aluminum ferrules, made by Andrew Mack & Son Brush Co.

1400 — Hairline, 1/8" (3.18 mm) - red sable bristle

1401 — 1/8" (3.18 mm) pony & goat hair

1402 — 1/4" (6.35 mm) pony & goat hair

1403 — 1/2" (12.7 mm) pony & goat hair

DIP KIT

- Includes:
 - 1 glass dip tube
 - 1 arrow hanger
 - 2 pints (946 ml) of white Crest-Lac
 - 2 pints (946 ml) of clear Crest-Lac
 - 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

801094 — Dip Kit

801085 — Cresting Kit and Dip Kit Combo

801095 — Dip Tube

801098 — Arrow Hanger

801100 — Dip'n Plug Ring

CRESTING STARTER KIT PAINT SET

NEW



- Six 1 oz jars of Crest-Lac paint:
 - Black, Red, Yellow, Blue, Silver, and Gold

301011KIT



TRADITIONAL



FLETCH-LAC

- Industry standard for over 75 years — top choice of custom arrow shops worldwide!
- Solvent-based crestring paints that dry to a hard, chip-resistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

1412 — 1 oz Jar (17.2 ml)
 1105 — Pint (473.1 ml)
 1106 — Quart (946.4 ml)
 1107 — Gallon (3.79 L)

GLOSS COLOR CHOICES



FLORESCENT COLOR CHOICES



MATTE color



METALLIC COLOR CHOICES



PRO TIP:

Fletch-Lac:

If thinning is desired,
use Fletch-Lac Thinner
sold on pg 49



CREST-LAC

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

301011 — 1 oz Jar (17.2 ml)
 301014 — Pint (473.1 ml)
 301012 — Quart (946.4 ml)
 301013 — Gallon (3.79 L)

GLOSS COLOR CHOICES



FLORESCENT COLOR CHOICES



METALLIC COLOR CHOICES



clear



PRO TIP:

Crest-Lac

If thinning is desired,
use distilled water **NOT**
paint thinner

FLETCH-LAC SEALANTS



CLEAR & BLUE CLEAR

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

1124 — BC/CL Pint (473 ml)

1125 — BC/CL Quart (946.4)

1126 — BC/CL Gallon (3.79 l)

SUPERCOAT

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

1120 — Supercoat Pint (473 ml)

1121 — Supercoat Quart (946.4)

1122 — Supercoat Gallon (3.79 l)

FLETCH-LAC THINNER



- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

1131 — Pint (473 mL)

1132 — Quart (946.4mL)

1133 — Gallon (3.79 L)



🎯 **PRO TIP:**

- All Bohning clearcoats can be used to seal wooden arrows.
- DO NOT apply Fletch-Lac Clearcoat, Blue Clear, or Supercoat on top of crestring.
- All clearcoats can be used over white crown-dipped arrows.
- Always allow the first coat of paint to dry before applying another.
- Clearcoat and Blue Clear are the same formula and thickness.
- Clearcoat and Blue Clear will seal arrows.
- Blue Clear has an additional bluing agent added to it.
- Bluing is added to make what is underneath it brighter/whiter.
- Supercoat is slightly thicker and leaves more protective film behind when dry.
- Supercoat is applied the same as the others and dries in a similar time.

All Bohning Clearcoats can be used interchangeably.

TRADITIONAL



ARROW HOLDER

- Innovative design holds securely but easily releases when your arrow is drawn
- Recurve arrow holder molded from TPE for the best combination of durability and ease of use
- Vented Arrow Retainer optimized for traditional shaft sizes 9/32, 5/16 and 11/32. Functional on all shafts from .166 to .27s
- Easy Installation with double sided adhesive foam (2 included) Peel off and press to fit

1527 — 1 Arrow Holder



2 HOLE REST

- Recurve Arrow Rest made of medium hard material for the best combination of strength and forgiveness.
- Available in either right or left handed.
- Easy Installation with double sided adhesive foam. Peel off and press fit your new rest.
- Two holes to allow for adjustability when installing around Berger button hole
- Accurate: Take more accurate shots with a traditional setup

1526R - (1) 2-Hole Rest Right

1526L - (1) 2-Hole Rest Left

Bulk:

1526R-50 - (50) 2-Hole Rest Right

1526L-50 - (50) 2-Hole Rest Left



STRING WHISKERS

- Two pieces per package, 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

1051 — 1Pair

1635 — 50 Pair



PRO TIP:

String Whiskers reduce vibration in your bow's string, reducing the noise created when shooting your bow. They can also be used as a way to judge wind speed and direction!

STRING NOCKS



- Creates a positive nocking point for consistent shots
- Quick and easy to install

Hunter (black liner):

for 12-14 strand strings —5.4 grains (350 mg)

Cam (red liner):

for 16-18 strand strings —7.4 grains (480 mg)

Cam String Nocks

1065 — 6 pk

1068 — 100 pk

1071 — 1000 pk

Hunter String Nocks

1064 — 6 pk

1067 — 100 pk

1070 — 1000 pk

FEATHER-DRI



- Protect your feather fletchings from the weather
- Colorless, odorless, water-repellent powder
- Includes bag to shake powder onto fletched feathers
- Environmentally safe

1611 - 250 mL Feather Dry Water Repellent

FEATHER TOWER®



- See page 6 for more information

601010 - Feather Tower Fletching Jig



COLLARLESS REVERSIBLE SHOOTER JERSEY

- Teal design and white design in one jersey
- Fabric Content - 100% polyester, 3 oz
- Moisture management/antimicrobial performance fabric
- SM-3XL (sizes tend to run large)

701075



BOHNING LONG SLEEVE TEE SHIRT

- 50/25/25 Long Sleeve Tee
- Lightweight Cotton Poly Blend
- SM-3XL

701001

Visit www.shop.bohning.com for additional apparel.



REALTREE®

- RealTree® Camo hat with distressed Bohning patch
- Hook and loop closure

701004RT



LEATHER PATCH

- Leather Bohning patch
- Mesh back
- Adjustable snap back

701043LTH



DISTRESSED BROWN

- Bohning's best seller
- Mesh back
- Adjustable snap back

701043TR



FRONT



BACK

WOMEN'S CRISS CROSS PONYTAIL CAP

- Charcoal Grey criss cross back design allows for high messy bun or high ponytail to fit comfortably through the back.
- Buckle Closure

701043WM

LURE PAINT



Our Surface Steel is a water-based, brilliantly colored, durable, low VOC paint especially developed for air spraying, brushing and dipping of wood, metal or plastic lures and jigs. It is user friendly, easily thinned with distilled water and clean-up is a snap. 22 colors available.

Extensive heat, humidity, and temperature testing. Developed and made in the USA. Coats and seals for a durable finish!

SURFACE STEEL: Indicate Color Code and Size:

F650 SURFACE STEEL Paints:

2 Ounce (2OZ) / Pint (PT) / Quart (QT) / Gallon (GA)


F651 SURFACE STEEL Clear Coat (CC):

2 Ounce (2OZ) / Pint (PT) / Quart (QT) / Gallon (GA)

F652 SURFACE STEEL THINNER/CLEANER: Pint (PT) / Quart (QT)



AIRBRUSH/BRUSH/DIP

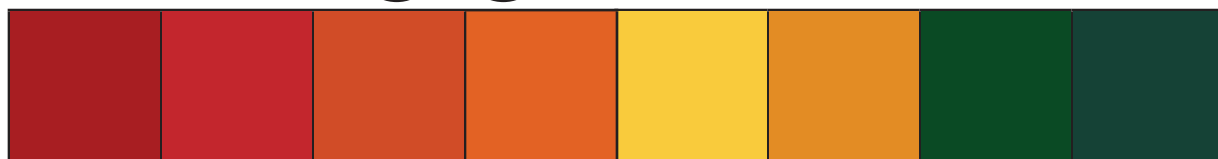


Red (RD) Cadmium Free Red	Light Red (LR) Pyrrole Red	Orange (OR) Cadmium Free Orange	Yellow Orange (YO) Pyrrole Orange	Yellow (YE) Cadmium Free Yellow	Dark Yellow (DY) Azo Yellow Orange	Bright Green (BG) Phthalo Green	Green (GR) Cobalt Green
-------------------------------------	--------------------------------------	---	---	---	--	---	-----------------------------------



Olive Drab (OD) Green Gold	Teal (TL) Cobalt Turquoise	Blue (BL) Ultramarine Blue	Navy Blue (NB) Phthalo Blue	Magenta (MG) Quinacridone Magenta	Purple (PU) Diozazine Purple	Brown (BR) Burnt Umber	Red Brown (RB) Burnt Sienna
--------------------------------------	--------------------------------------	--------------------------------------	---------------------------------------	---	--	----------------------------------	---------------------------------------



Tan (TN) Raw Umber	Rocket Red™ (RR)	Blaze Orange™ (BO)	Saturn Yellow™ (SY)	Chartreuse (CH)	Signal Green™ (SG)	Aurora Pink™ (HP)	Gold Metallic (GO)
------------------------------	-------------------------	---------------------------	----------------------------	------------------------	---------------------------	--------------------------	---------------------------

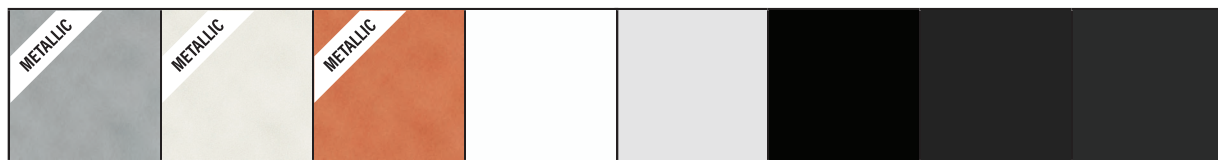

Silver Metallic (SL)	Pearl Metallic (PL)	Copper Metallic (CO)	White (WH) Titanium White	Translucent White (TW) Mixing White	Black (BK) Mars Black	Dark Gray (DG) Payne's Gray	Light Gray (LG) Graphite Gray
-----------------------------	----------------------------	-----------------------------	-------------------------------------	---	---------------------------------	---------------------------------------	---



**SOLVENT BASED
FAST DRYING
HIGH IMPACT
DESIGNED FOR PAINTING LURES
TESTED FOR FRESH AND SALT WATER**



Lure-Lac paint is a fast drying lacquer with high impact, flexible polymers that bond to a variety of surfaces including lead and lead-free jigs, plastic lure bodies, metal lures and spoons, wood lure bodies and cork.

Lure-Lac has been formulated for salt water and fresh water use. It has been shown to be resistant to salt water exposure equal to 24 hours a day for an entire year. Lure-Lac is easily applied with either an air brush or dipping by thinning with Lure-Lac Thinner. Dry to the touch in about 10 minutes!


LURE LAC: Indicate Color Code and Size:

F600 LURE-LAC Paints: 2 Ounce (2OZ) / Pint (PT) / Quart (QT) / Gallon (GA)

F601 LURE-LAC Clear Coat (CC):
2 Ounce (2OZ) / Pint (PT) / Quart (QT) / Gallon (GA)

F602 LURE-LAC THINNER/CLEANER - Pint (PT) / Quart (QT)

GLOSS	
Gloss White	(WH)
Gloss Black	(BK)
Gloss Red	(RD)
Gloss Orange	(OR)
Gloss Yellow	(YE)
Gloss Green	(GR)
Gloss Blue	(BL)
METALLIC	
Metallic Gold	(GO)
Metallic Silver	(SL)
Metallic Pearl	(PL)
Metallic Copper	(CO)
FLUORESCENT	
*Rocket Red TM	(RR)
*Blaze Orange TM	(BO)
*Saturn Yellow TM	(SY)
Chartreuse	(CH)
*Signal Green TM	(SG)
*Aurora Pink TM	(AP)
FLAT	
Earth Brown	(EB)
Olive Drab	(OD)
White Primer	(MWH)

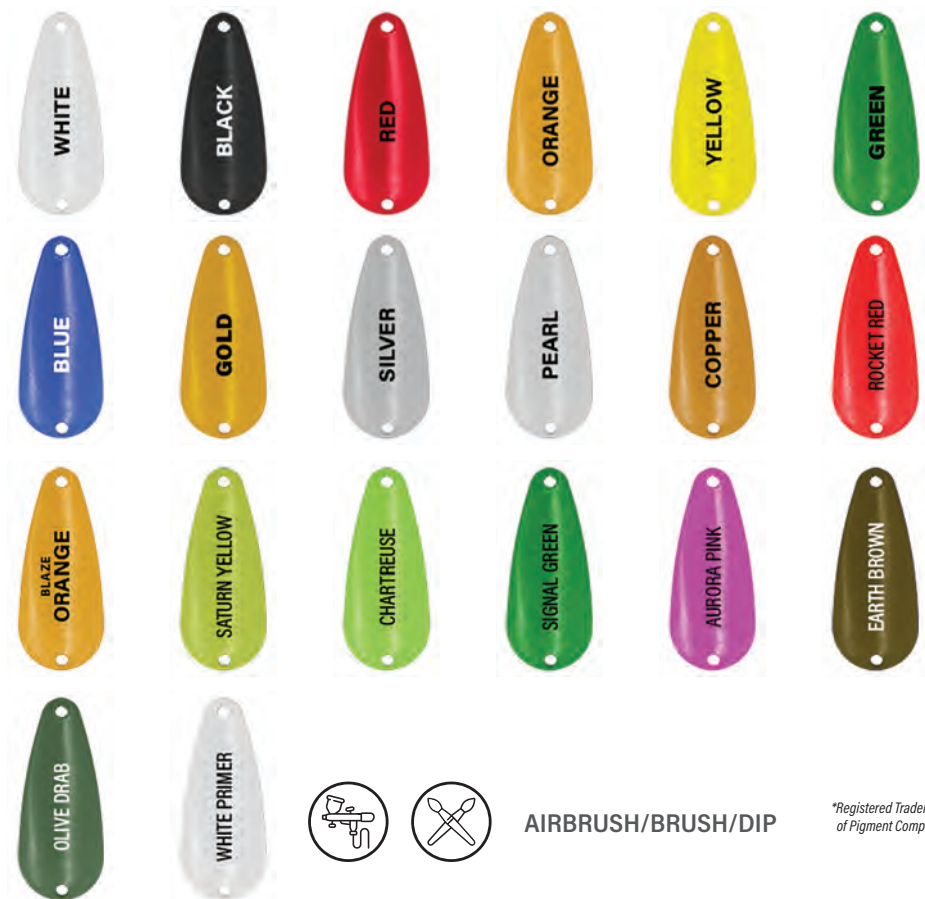

*Registered Trademark
of Pigment Company

DISPLAYS

FISHBOWL DISPLAY



1630BOWL
Tex-Tite - 24 pk



1631BOWL
Seal-Tite - 24 pk



941019BOWL
Lightning Lube - 16 pk



1634BOWL
Xccelerator Wax - 16 pk



301023BOWL
Arrow Lube - 16 pk



301025BOWL
Fletch Fuse - 24 pk



301019BOWL
String Shield - 16 pk



301028BOWL
ZipSnap Wax - 24 pk

IMPROVE POINT OF PURCHASE SALES

Stock our most popular adhesives and waxes in these handy fishbowl displays. Put them near your cash register. Every archer needs these products, so make it easy for them to find and purchase. Save money on packaging and restocking these with bulk purchases!



STOCKED SNAPFIT™ DISPLAY

- Shelf capacity: 5 lbs (2.3 kg) per 4" panel
- Hook capacity: 1 lb (.45 kg) per hook
- Made from engineering-grade, recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for non-marring stability
- Slots in column caps accommodate standard foam board signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays

CALL BOHNING FOR MORE DETAILS AND ORDERING: 231 - 229 - 4247

ALL DISPLAYS:



BK
Black



NEW

CUSTOM LOGO STICKERS

- Custom stickers with your logo or shop name
- Great for give-aways or for sale

CHOOSE YOUR STYLE and QUANTITY

- 8 Styles
- 100 Custom Stickers
- 300 Custom Stickers

STYLE 1 (CD1)



STYLE 2 (CD2)



NEW

STYLE 5 (CD5)



NEW

STYLE 6 (CD6)



STYLE 3 (CD3)



STYLE 4 (CD4)



NEW

STYLE 7 (CD7)



NEW

STYLE 8 (CD8)



1.

CHOOSE YOUR DESIGN

Choose one of our Custom Sticker Designs.

2.

SEND US YOUR LOGO

Email your logo to custom@bohning.com
Preferred Logo Formats:
.png / .ai / .eps / .pdf / .jpg

3.

CHOOSE YOUR QUANTITY

100 or 300 Custom Stickers

THAT'S IT!

We will send you Custom Stickers you can use as give-aways or sell

Have an idea for other custom stickers or banners?
Contact us at custom@bohning.com

BANNER-USA



POCKET QUIVER SNAPFIT DISPLAY

- Order 12 Pocket Quivers and receive a free SNAPFIT table top display. Great for impulse point of purchase buying
- Refill with a 10 pack

201035BK-12SF
201035BK-10 - 10 Pack



BOHNING BANNER

- 24" x 48" Vinyl Banner
- 61cm x 122cm Vinyl Banner
- Show off your Bohning Pride
- Great for your shop, range or garage

BANNER-USA - USA Flag
Bohning Banner

BANNER-RD - Red Bohning
Banner

BANNER-RD



REPLACEMENT PARTS

ADHESIVES

1304 — Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)
13032 — Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)
1316 — Alcohol Burner Replacement Wick
1134 — Platinum Thinner* - 1 Pint (473.1 ml)

**PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING.
ONLY USE PLATINUM THINNER WITH PINT, QUART, OR GALLON SIZES OF
PLATINUM THAT HAVE THICKENED WITH TIME.*

CRESTING AND DIPPING

1400 — Hair Line Cresting Brush
1401 — 1/8" Cresting Brush (3.18 cm)
1402 — 1/4" Cresting Brush (6.35 cm)
1403 — 1/2" Cresting Brush (12.7 cm)

801095 — Dip Tube
801098 — Arrow Hanger
801100 — Dip'n Plug Ring

FLETCHING JIGS

Blazer® Jigs and The Big Jig

1319 — Clamp Release Tape, 3 pieces
13192 — Clamp Release Tape Bulk Pack, 21 Pieces
8250 — Blazer Straight Clamp
8251 — Blazer 3° Right Helical Clamp
8361 — Big Jig 3° Right Helical Clamp
8362 — Big Jig 1° Right Offset Clamp
601004 — Crossbow Receiver / Adapter
601009 — 4 Fletch Disk Adapter

Multi-Fletcher®

601056 — Multi-Fletcher Clamp
601057 — Insert, 3° Right Helical
601058 — Insert, 1° Right offset
601064 — Insert, 1.5° Right offset
601059 — Insert, Straight
601060 — Insert, 1° Left Offset
601061 — Insert, 3° Left Helical
601062 — Insert, Feather 2° Right Offset
601063 — Insert, Feather 2° Left Offset

Frontier Jig

601056 — Frontier Clamp
601057 — Insert, 3° Right Helical
601058 — Insert, 1° Right offset
601064 — Insert, 1.5° Right offset
601059 — Insert, Straight
601060 — Insert, 1° Left Offset
601061 — Insert, 3° Left Helical
601004 — Crossbow Receiver / Adapter

Tower® Jigs

601011 — Center Post for .246 (6.25 cm) ID
(Standard size)
601012 — Center Post for Pin Adapter
601013 — Center Post for .167" (5.50 cm) ID (F Nock size)
601014 — Center Post for .204" (5.18 cm) ID (A Nock size)
601015 — Center Post for Crossbow Bolts
601016 — Center Post for Swedged-end Arrows
601030 — Center Post for .231" (5.87 cm) ID
(H.E. Nock size)
1200 — Arms, 1° Right Offset (red), set of 3
1201 — Arms, Straight (gray), set of 3
1202 — Arms, 3° Helical (black), set of 3
601007 — Arms, Impulse Straight (yellow), set of 3
601024 — Arms, Mylar Straight (gray w/ red clip), set of 3
601037 — Arms, 1° Left Offset (orange), set of 3
601038 — Arms, 3° Left Helical (purple), set of 3
601008L — Arms, Feather Left Wing (green), set of 3
601008R — Arms, Feather Right Wing (blue), set of 3
80211 — Tower Spacers, set of 3
601017 — Pressure Ring, Small (red)
601018 — Pressure Ring, Large (lime)
601036 — Pressure Ring, X-Large (orange)
1319 — Clamp Release Tape, 3 pieces
13192 — Clamp Release Tape, Bulk Pack (21 Pieces)

Pro Class Jig

1351 — Straight Clamp
1352 — Right Clamp
1353 — Left Clamp
601020 — 1" (25cm) Griffin Vane Clamp
601004 — Crossbow Receiver-Adapter

Cauldron Jig

601026 — Adjustable Compression Ring
601057-3 — (3) Inserts, 3° Right Helical
601058-3 — (3) Inserts, 1° Right offset
601064-3 — (3) Inserts, 1.5° Right offset
601059-3 — (3) Inserts, Straight
601060-3 — (3) Inserts, 1° Left Offset
601061-3 — (3) Inserts, 3° Left Helical
601028 — Cauldron Insert Positioning
Clip - 3 pk

Cauldron Jig Crossbow Edition

800-XB — Cauldron XBow Center Post
(Only works with Crossbow Cauldron)
601026 — Adjustable Compression Ring
601057-3 — (3) Inserts, 3° Right Helical
601058-3 — (3) Inserts, 1° Right offset
601060-3 — (3) Inserts, 1° Left Offset
601061-3 — (3) Inserts, 3° Left Helical
601028 — Cauldron Insert Positioning
Clip - 3 pk

QUIVERS

Bruin Quiver

201031 — Retainer Set
201032 — Tree Hanging Loop
1073 — Lever Lock

Pocket Quiver

201036BK - Body
201037BK - Clip
201038 - Retainer Cap

Lynx® Quiver

1045 — Retainer Set for
small .166" (4.22 cm)
and .204" (5.18 cm)
arrows
10382 — Retainer Set for
standard-size
arrows

STRIPPER TOOLS

15240 — The Stripper Blades, 3 pk (for original red stripper)
801026 — The Strip-Pro Blades, 3 pk (for new black stripper)

SHOOTER STOOL

701057 — Arrow tubes with clips



NORTH PLANT



Proudly manufacturing products that are sold world-wide from our location in Northern Michigan since 1946.



Bohning is an industry leader in innovative archery accessories that has been creating products in Northern Michigan since 1946.

www.bohning.com

Website QR Code



BOHNING USA FISHING SUPPLY sells fishing products, paints, adhesives, and waxes. 7361 N 7 Mile Rd. Lake City, MI 49651

www.usafishingsupply.com

Website QR Code



Bohning Golf Products takes pride in producing a wide variety of Ferrules for both Irons and Metalwoods. Bohning has served the golf industry for over 30 years. Golf Ferrules not only provide a decorative element to a golf club, they also provide a smooth transition from the shaft to the hosel, covering any rough edges.

www.bohninggolf.com

Website QR Code



ADK Rescue manufactures and sells the ADK - 3 in 1 Ice Rescue tool to first responders and Ice Rescue Teams. The tool allows the first responder to spud, measure, and rescue victims that have fallen through the ice.

www.ADKRescue.com

Website QR Code



Bohning AG develops, engineers, and produces innovative products for the agricultural industry. The Bohning Block is a revolutionary hoof block. Durable, with no heating necessary to install, this block stays put, reducing the need for reapplication.

www.bohningag.com

Website QR Code



Bohning Precision Products can get your machining or tooling projects off the ground and in your hands quickly and efficiently. 50+years of experience in machining and molding. We will get your project done. Don't send your tooling needs out of the country.

www.bohningprecisionproducts.com

Website QR Code



MAKING INNOVATIVE ARCHERY PRODUCTS IN NORTHERN MICHIGAN SINCE 1946

JANUARY

Su	Mo	Tu	We	Th	Fr	Sa
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

FEBRUARY

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	

MARCH

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

APRIL

Su	Mo	Tu	We	Th	Fr	Sa
		1	2	3	4	5
6	7	8	9	10	11	12
13	14	15	16	17	18	19
20	21	22	23	24	25	26
27	28	29	30			

MAY

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

JUNE

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

JULY

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

AUGUST

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

SEPTEMBER

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

OCTOBER

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

NOVEMBER

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30						

DECEMBER

Su	Mo	Tu	We	Th	Fr	Sa
						1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31					

BOHNING - 7361 N 7 Mile Rd., Lake City MI 49651 USA
info@bohning.com | 231.229.4247 | www.bohning.com