



# 2021 CATALOG



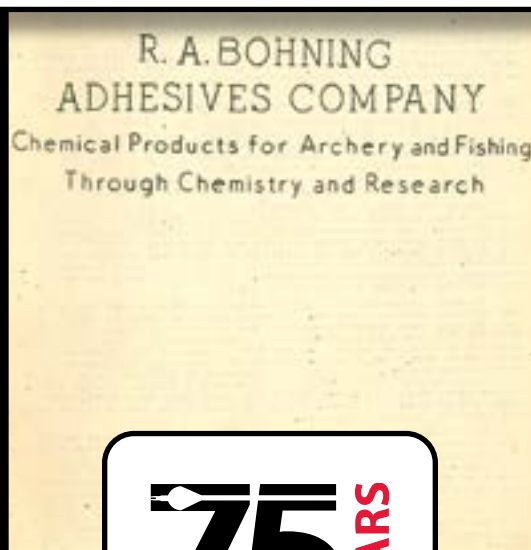

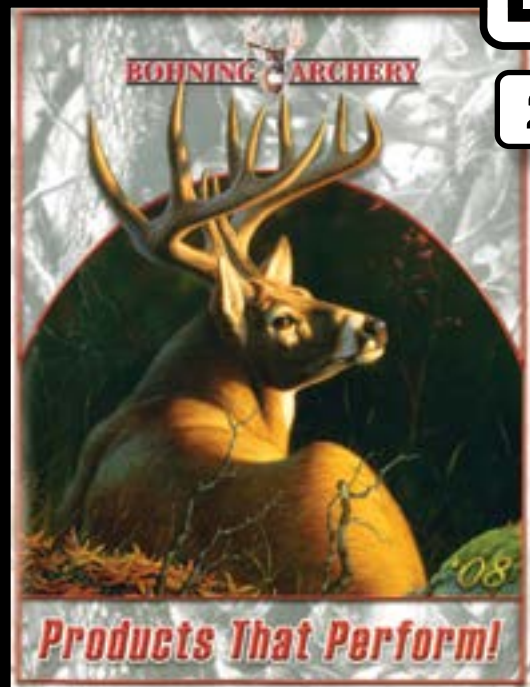

Bohning Manufacturing Facilities  
*Over 42,000 sq ft in the heart  
of the northern Michigan woods*





Since 1946, the **Bohning Company LTD®** has proudly designed and manufactured some of the most innovative and successful arrow accessories from the same location in Lake City, Michigan. As we enter our 75th year of operation, the passion to continue the tradition remains stronger than ever. We stand proudly with our customers, distributors, and sales partners, while supporting archery organizations world-wide. This milestone anniversary is made possible by **you**; the archer, dealer, distributor, media and sales partners, who have graced us with your trust for 75 years.

The Bohning story started when Rollin Bohning, a chemist, family man, and archer sought to solve the issue of broadhead to arrow adhesion in 1946. That same year Ferr-L-Tite® was created and, after extensive work with Fred Bear and Doug Easton, it was perfected. Seventy-five years later, Ferr-L-Tite remains the industry standard.

We are a privately owned and operated company, manufacturing products which have earned the title "most successful and widely used in the world". Throughout the past seven decades, we have produced items for the archery, Christmas tree, fishing, and agricultural industries.

Here at Bohning innovation is expected, delivered, and driven by a team of dedicated people who live and work in a place of natural beauty, where wildlife is abundant and peace of mind is just a dirt road away. Our everyday commitment to archery is evident in our continued and enthusiastic support of many local, regional, and national organizations. We've contributed to the mission of many these organizations, even in trying economic times, and we are a recognized leader in customer service, quality, and innovation because of our close contact, involvement, and support of the industry.

Our desire and ability to take a product from conception to launch in a short time frame, react to customer demands, and constantly improve products sets us apart from all others. Quality and performance keeps Bohning products on the arrow, on the fletching table, and in the photo after the hunt. The memories earned from those adventures live in the very products we make.



## CONTENTS

2	Featured Products
6	Vanes
14	Wraps
16	Nocks
18	Fletching Jigs
20	Premium Points
24	String Care
29	Adhesives
31	Accessories
40	Crossbow
42	Traditional
48	Apparel
49	Replacement Parts

## TO ORDER

[www.bohning.com](http://www.bohning.com)

231.229.4247

[info@bohning.com](mailto:info@bohning.com)


7361 N 7 Mile Rd  
Lake City, MI 49651 - USA






## GRIFFIN® VANE - PG. 9

In 2021 the Summer Olympics will be held in Tokyo, Japan. Bohning is featuring our one of a kind Olympic recurve vane, the Griffin. This scientifically designed vane is perfect for Olympic recurve and 3D compound shooters. The twisted ribbon design delivers two times the rotation as mylar vanes and is super durable.

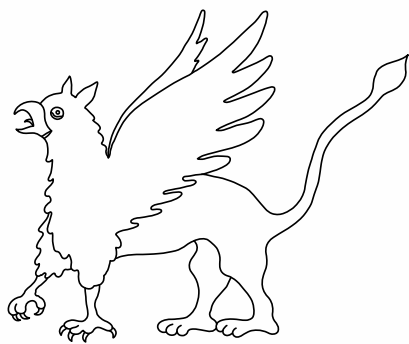

**GRIFFIN®**

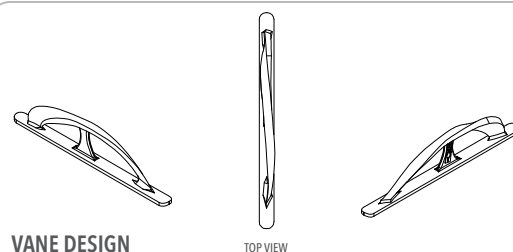


VANE DESIGN

TOP VIEW

- For Olympic recurve and 3D compound
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation — spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs



**PRO TIP:**  
Can be fletched using glue or tape



**WH**  
White



**SL**  
Silver




**BK**  
Black



**RD**  
Red



**NO**  
Neon  
Orange



**NY**  
Neon  
Yellow



**NG**  
Neon  
Green



**SB**  
Satin  
Blue



**HP**  
Hot  
Pink





## SHOOTER STOOL- PG. 32

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

This rugged shooting stool is designed for hunters, campers, and competitive shooters. It features a built in cooler and has arrow tubes for your convenience. Be comfortable this season with the Shooters Stool!



## MULTI-FLETCHER®- PG. 19

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including bolts and micro arrows
- Easy clean up — clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles

Bring your arrow fletching game to the next level. The Multi-Fletcher allows you to fletch every type of arrow imaginable. Everything is included to accurately place your plastic vanes straight, 1° right and left, or 3° right and left. It even comes with a split insert to work with your feathers. Are you ready to become a fletching expert? Try out the Multi-Fletcher this season!







# HUNTER'S E D I T I O N

WRAPS - PG. 14  
BLAZER VANES - PG. 6



**NEW**  
Kryptek Highlander (KH) - Wrap  
White (WH) and Brown (BR) - Blazer Vane



**NEW**  
Kryptek Mandrake (KM) - Wrap  
Black (BK) and Neon Orange (NO) - Blazer Vane



**NEW**  
Kryptek Pontus (KP) - Wrap  
Teal (TL) and Silver (SL) - Blazer Vane



Real Tree Edge® (RE) - Wrap  
White (WH) - Blazer Vane



Fred Bear Camo (FBC) - Wrap  
Fred Bear Signature (FB) - Blazer Vane

## POCKET QUIVER™: *Available Spring 2021!*

**NEW**



PG. 37







# BLACK SKY™

**NEW**



PG.36

**BLACK SKY™  
RELEASE POUCH**

701040BK



**BLACK SKY™  
FIELD QUIVER**

701042BK

PG. 36



PG.36

**BLACK SKY™  
TARGET QUIVER**

701041BK



**BLACK SKY™  
ADULT BOW CASE**

701037BK

PG. 34



**BLACK SKY™**






# Blazer®

**PRO TIP:** Introduced in 2004, the Blazer Vane was designed for hunters and target shooters alike. The Blazer vane allows you to switch from field points to broadheads with minimal adjustment. This revolutionary product is still the #1 vane in the world.

## Blazer®

**BLAZER® VANE**  
THE WORLD'S #1 VANE!


**10831** - 36 pk  
**10832** - 100 pk  
**10833** - 1000 pk



**STIFFNESS: 6.0**



**PRO TIP:**  
Reader's Choice Gold  
Best Fletching  
since 2005.  
- **Bowhunting  
World**

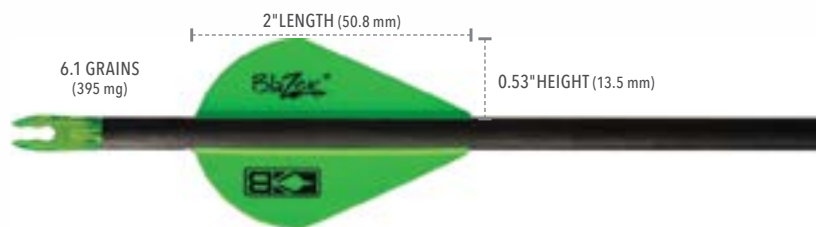

**PRO TIP:**  
Made out of  
the ultra-durable  
Blazer vane material.  
Time-tested,  
performance  
proven.

	<b>WH</b> White		<b>SL</b> Silver		<b>BK</b> Black		<b>BKO</b> Blackout
	<b>NR</b> Neon Red		<b>RD</b> Red		<b>NO</b> Neon Orange		<b>NY</b> Neon Yellow
	<b>NG</b> Neon Green		<b>KW</b> Kiwi		<b>TL</b> Teal		<b>BL</b> Blue
	<b>SB</b> Satin Blue		<b>PU</b> Purple		<b>HP</b> Hot Pink		<b>BR</b> Brown
	<b>WT</b> White Tiger		<b>RT</b> Red Tiger		<b>OT</b> Orange Tiger		<b>YT</b> Yellow Tiger
	<b>GT</b> Green Tiger		<b>TT</b> Teal Tiger		<b>PT</b> Pink Tiger		<b>PUT</b> Purple Tiger
	<b>DTOM</b> Don't Tread on Me NY, or WH		<b>AM</b> American Made WH		<b>FB</b> Fred Bear Made WH		<b>RT</b> Realtree® BR or WH

## Blazer®

**ALL COLOR  
VANE AND WRAP  
COMBO PACKS**

- Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

**101042**

- Includes:
  - 12 arrow wraps (standard size)
  - 36 True Color Blazer® vanes




**NEW**  
**101042BS**  
Blue Sky  
Combo



**NEW**  
**101042CT**  
Caution Tape  
Combo



**NEW**  
**101042FR**  
First Responder  
Combo

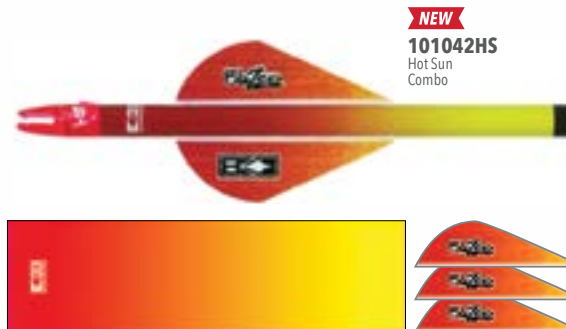


**NEW**  
**101042HS**  
Hot Sun  
Combo





🎯 **PRO TIP:** One factor in choosing a vane is its stiffness. Bohning has developed a stiffness scale to help you dial in your perfect arrow setup. On a 1 to 10 scale, 1 is the most flexible and 10 is the stiffest.



**STIFFNESS: 5.0**


**Blazer®**

**TRUE COLOR  
BLAZER® VANE**

**10831** – 36 pk  
**10832** – 100 pk  
**10833** – 1000 pk



3D



**STIFFNESS: 6.0**



🎯 **PRO TIP:**  
Same great  
Blazer vane with  
enhanced  
graphics



**Blazer®**

**TRUE COLOR  
VANE AND WRAP  
COMBO PACKS**


- Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps

#### 101040

- Includes:
  - 12 arrow wraps (standard size)
  - 24 True Color Blazer® vanes
  - 12 white Blazer® vanes



**101040AF**  
American Flag  
Combo

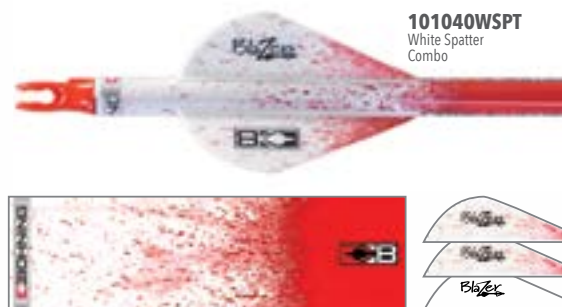

**101040WSPT**  
White Spatter  
Combo

No other vane manufacturer does color like Bohning. Our 4 color printing process gives us the ability to make you stand out in the crowd. With over 50 color choices of Blazer Vanes, you can make your arrow set-up unique. Remember at Bohning: "It's In Our Vanes!®"





## Blazer®

### BLAZER® COMBO PACK

- Includes:
  - 12 white Blazer® vanes
  - 24 color Blazer® vanes

**101050** – 36 pk



**WH/RD**  
White and Red



**WH/NY**  
White and Neon Yellow



**WH/HP**  
White and Hot Pink



**WH/NO**  
White and Neon Orange



**WH/NG**  
White and Neon Green



**WH/AF**  
White and American Flag



## Blazer®

### BLAZER® TRUEFLETCH®

- Shrinks to fit shafts  
0.219" - 0.375"  
(5.56 mm - 9.525 mm)
- Store in a cool place until use
- 5" in length (127 mm)
- Average weight: 27 grains (1.7 g)

**101001** – 6 pk

**101003** – 50 pk



**BO**  
Bright Orange & White



**TL**  
Teal & White



**AF**  
American Flag & Red



**BY**  
Bright Yellow & White



**WT**  
White Tiger & White



**BWF**  
Blue Flame & White



**BG**  
Bright Green & White



**CF**  
Bright Orange & Bright Yellow



#### PRO TIP:

Shrinks to fit arrow shafts in boiling water. Lightly rough up shaft surface prior to applying.

### CUSTOM ARROW WRAPS AND BLAZER VANES

- Color options:
  - Wraps: All colors including patterns
  - Blazer Vanes: Solid colors only
- Order 50 wraps minimum
- Order 1,000 vanes minimum
- Call 231-229-4247 for more info or email [info@bohning.com](mailto:info@bohning.com)

ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!







**Blazer<sup>®</sup> X2**

**BLAZER X2<sup>®</sup>**

**10762** – 100 pk  
**10763** – 1000 pk



**STIFFNESS: 6.5**



**WH**  
White



**NO**  
Neon Orange



**SB**  
Satin Blue



**BK**  
Black



**NY**  
Neon Yellow



**PU**  
Purple



**NR**  
Neon Red



**NG**  
Neon Green




**HP**  
Hot Pink



**RD**  
Red



**BL**  
Blue

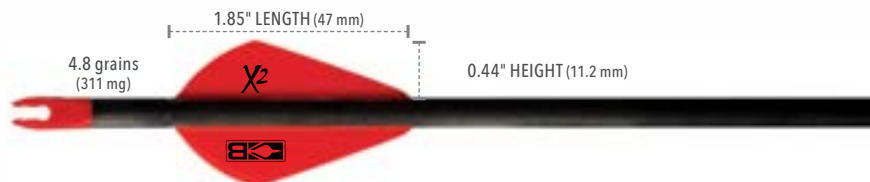


**PRO TIP:**  
Made of Blazer  
Vane material.

**Blazer<sup>®</sup>**

**MINI BLAZER<sup>®</sup>**

**10842** – 100 pk  
**10843** – 1000 pk



**STIFFNESS: 6.2**



**WH**  
White



**NY**  
Neon Yellow



**BK**  
Black



**NG**  
Neon Green



**RD**  
Red



**SB**  
Satin Blue



**NO**  
Neon Orange



**HP**  
Hot Pink




**PRO TIP:**  
Made of Blazer  
Vane material.



**GRIFFIN<sup>®</sup> VANE**

- For Olympic recurve and 3D compound
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation – spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs

**101055** – 40 pk



**STIFFNESS: 3.5**



**WH**  
White



**SL**  
Silver



**BK**  
Black



**RD**  
Red



**NO**  
Neon Orange



**NY**  
Neon Yellow



**NG**  
Neon Green




**SB**  
Satin Blue



**HP**  
Hot Pink

**VANE DESIGN**

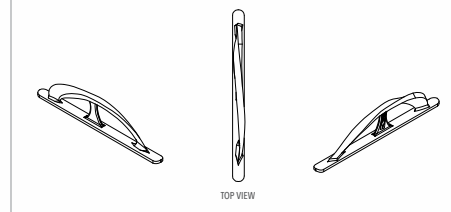

**PRO TIP:**  
Can be fletched  
using glue or  
tape






## HEAT VANE

- Made out of the ultra-stiff Heat<sup>®</sup> vane material for maximum arrow stabilization, arrow control, and quiet flight

101036 – 36 pk

101037 – 100 pk

101038 – 1000 pk



STIFFNESS: 9.0



**PRO TIP:**  
Blazer Bond or  
Fletcher-Fuse are  
recommended  
for this vane.



WH  
White



SL  
Silver



BK  
Black



BKO  
Blackout



NR  
Neon  
Red



RD  
Red



NO  
Bright  
Orange



NY  
Bright  
Yellow



NG  
Neon  
Green



TL  
Teal



BL  
Blue



SB  
Satin  
Blue



PU  
Purple



HP  
Hot  
Pink



AF  
American  
Flag



## X3<sup>™</sup> VANE

- Made out of the ultra-stiff Heat<sup>®</sup> vane material for maximum arrow stabilization, arrow control, and quiet flight


101051 – 36 pk

101052 – 100 pk


101053 – 1000 pk




1.75" AND 2.25" VANE  
(44.5 mm and 57.2 mm)



STIFFNESS: 9.0

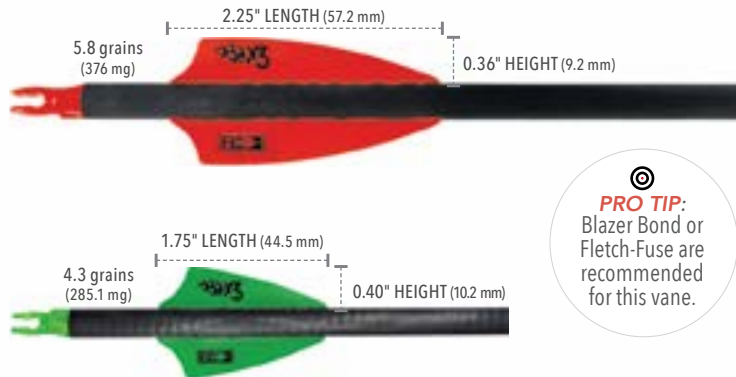

**PRO TIP:**  
Blazer Bond or  
Fletcher-Fuse are  
recommended  
for this vane.



WH  
White



SL  
Silver



BK  
Black



NR  
Neon  
Red



RD  
Red



NO  
Neon  
Orange



NY  
Neon  
Yellow



NG  
Neon  
Green



TL  
Teal



BL  
Blue




SB  
Satin  
Blue



PU  
Purple



HP  
Hot  
Pink



AF  
American  
Flag





X VANE®

• Made of Blazer® vane material

10771 – 36 pk


10772 – 100 pk

10773 – 1000 pk



3.5" VANE

(88.9 mm)




STIFFNESS: 5.8



3" VANE

(76.2 mm)




STIFFNESS: 6.1



2.25" VANE

(57.2 mm)




STIFFNESS: 6.7






1.5" AND 1.75" VANE

(38.1 mm and 44.5 mm)



STIFFNESS: 6.7

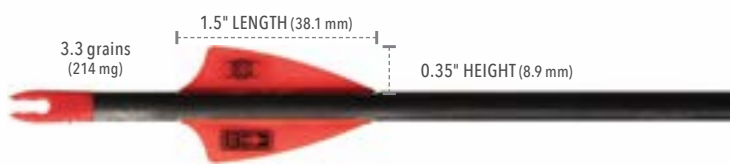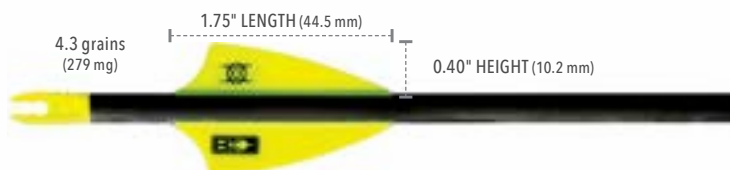WH  
WhiteRD  
RedTL  
TealHP  
Hot  
PinkSL  
SilverNO  
Neon  
OrangeBL  
BlueAF  
American  
FlagBK  
BlackNY  
Neon  
YellowSB  
Satin  
BlueUKF  
Union Jack  
(1.75" only)NR  
Neon  
RedNG  
Neon  
GreenPU  
Purple






## ZEN® VANE

- Made of **Blazer®** vane material
- Solves clearance issues when using large diameter shafts

**101047** – 36 pk  
**101048** – 100 pk  
**101049** – 1000 pk



**STIFFNESS: 6.5**

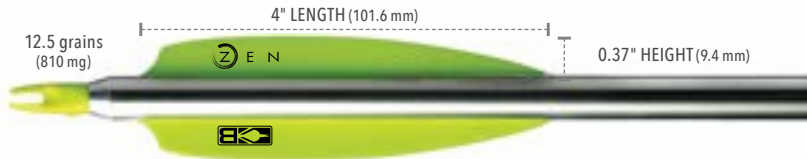

**WH**  
White



**SL**  
Silver



**BK**  
Black



**NR**  
Neon Red



**RD**  
Red



**NO**  
Neon Orange



**NY**  
Neon Yellow



**NG**  
Bright Green



**TL**  
Teal



**BL**  
Blue



**SB**  
Satin Blue



**PU**  
Purple



**HP**  
Hot Pink



**UKF**  
Union Jack



**AF**  
American Flag





## AIR™ VANE

- Made of **Blazer®** vane material
- Great for long distances and smaller diameter shafts
- Ideal for minimizing crosswind drift

**101026** – 36 pk  
**101027** – 100 pk  
**101028** – 1000 pk



**STIFFNESS: 7.0**



**WH**  
White



**SL**  
Silver



**BK**  
Black



**NR**  
Neon Red



**RD**  
Red



**NO**  
Neon Orange



**NY**  
Neon Yellow



**NG**  
Neon Green



**TL**  
Teal



**BL**  
Blue



**SB**  
Satin Blue



**PU**  
Purple



**HP**  
Hot Pink



**AF**  
American Flag



**UKF**  
Union Jack



**CF**  
Camp Fire



## ICE VANE

- Made of **Blazer®** vane material
- Ideal for minimizing crosswind drift

**101021** – 36 pk  
**101022** – 100 pk  
**101023** – 1000 pk



**STIFFNESS: 7.0**



**WH**  
White



**SL**  
Silver



**BK**  
Black



**NR**  
Neon Red



**RD**  
Red



**NO**  
Neon Orange



**NY**  
Neon Yellow



**NG**  
Neon Green



**TL**  
Teal



**BL**  
Blue



**SB**  
Satin Blue



**PU**  
Purple



**HP**  
Hot Pink





**AF**  
American Flag




**IMPULSE™ VANE**



- Minimizes crosswind drift and the effects of wind gusts

**101008** – 3" 40 pk**101007** – 3" 100 pk**101006** – 3" 1000 pk**101011** – 4" 40 pk**101010** – 4" 100 pk**101009** – 4" 1000 pk**3" VANE**  
(76.2 mm)**STIFFNESS: 2.9****4" VANE**  
(76.2 mm)**STIFFNESS: 3.0****BOLT™ VANE**


- Made of ultra-stiff vane material

**101033** – 36 pk**101034** – 100 pk**101035** – 1000 pk**STIFFNESS: 8.4****BRONCO® VANE**



- Made of Blazer® vane material

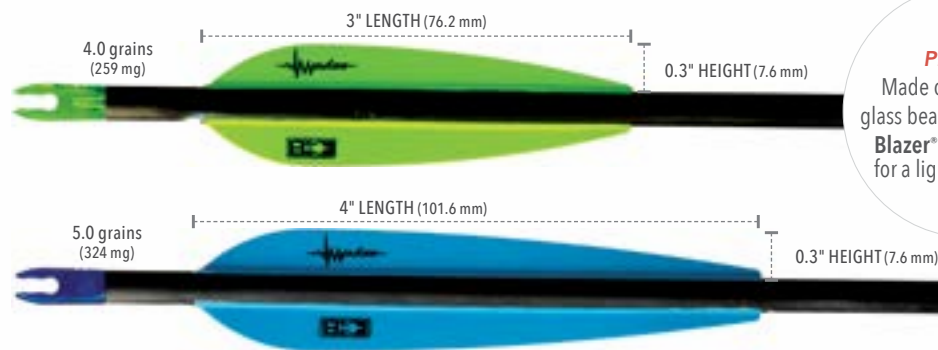**10501** – 36 pk**10502** – 100 pk**10503** – 1000 pk**3" VANE**  
(76.2 mm)**STIFFNESS: 6.2****4" VANE**  
(101.6 mm)**STIFFNESS: 5.7****PRO TIP:**


Made of microscopic glass beads embedded in **Blazer®** vane material for a light weight vane



**PRO TIP:**  
Blazer Bond or Fletch-Fuse glues are recommended for this vane.

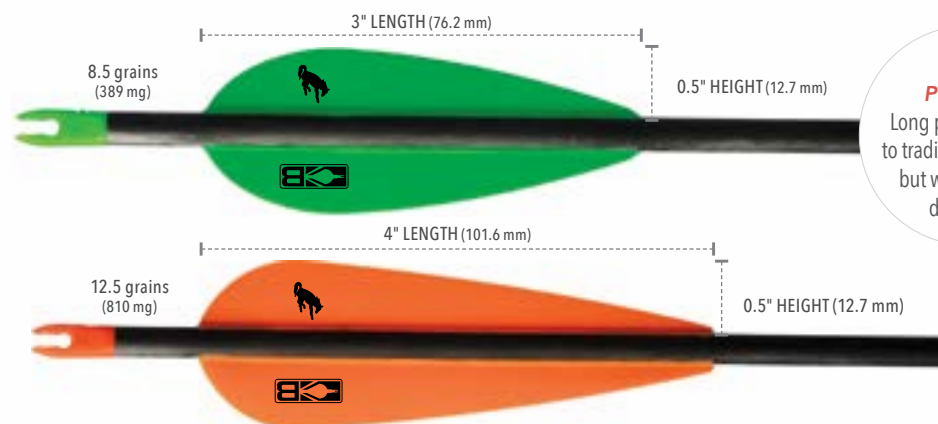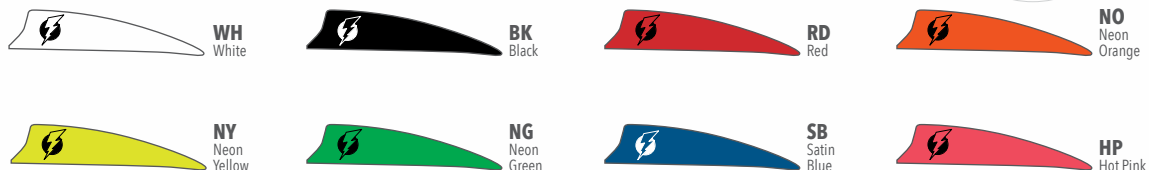

**PRO TIP:**  
Long profile similar to traditional feathers but with superior durability

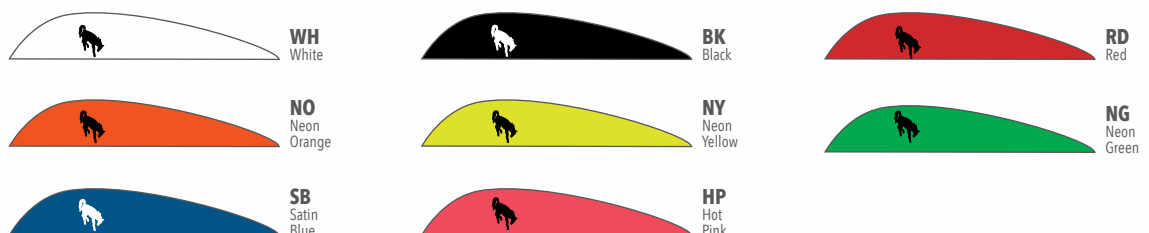



## SOLID WRAPS

- Indicate color code when ordering
- 13 wraps per pack

4" WRAP (101.6 mm)

- 501031** – 4" Standard
- 501032** – 4" Small
- 501033** – 4" XS
- 501034** – 4" Large
- 501035** – 4" XL

5.5" WRAP (139.7 mm)

- 501071** – 5.5" Standard
- 501072** – 5.5" Small
- 501073** – 5.5" XS
- 501074** – 5.5" Large
- 501075** – 5.5" XL

7" WRAP (177.8 mm)


- 501051** – 7" Standard
- 501052** – 7" Small
- 501053** – 7" XS
- 501054** – 7" Large
- 501055** – 7" XL

## SOLID AND REFLECTIVE WRAPS



WEIGHT CODE (SEE TABLE PG. 13)

## ARROW WRAP FIT GUIDE

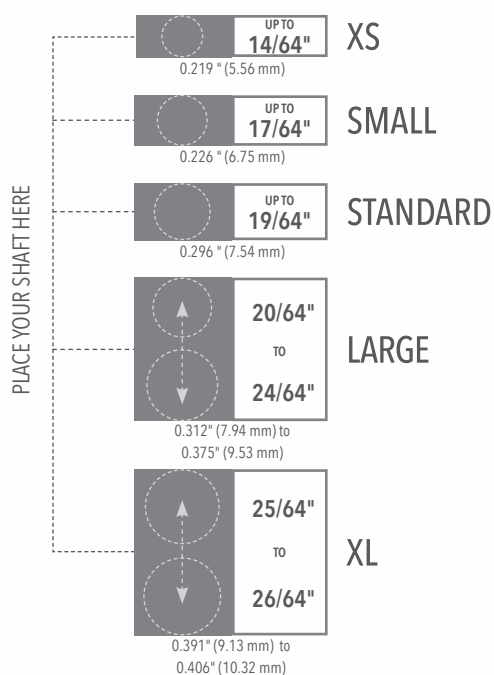

## PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

- 501001** – 4" Standard
- 501002** – 4" Small
- 501003** – 4" XS
- 501004** – 4" Large
- 501005** – 4" XL


5.5" WRAP (139.7 mm)

- 501061** – 5.5" Standard
- 501062** – 5.5" Small
- 501063** – 5.5" XS
- 501064** – 5.5" Large
- 501065** – 5.5" XL

7" WRAP (177.8 mm)

- 501041** – 7" Standard
- 501042** – 7" Small
- 501043** – 7" XS
- 501044** – 7" Large
- 501045** – 7" XL

## NEW HIGH DEFINITION WRAPS

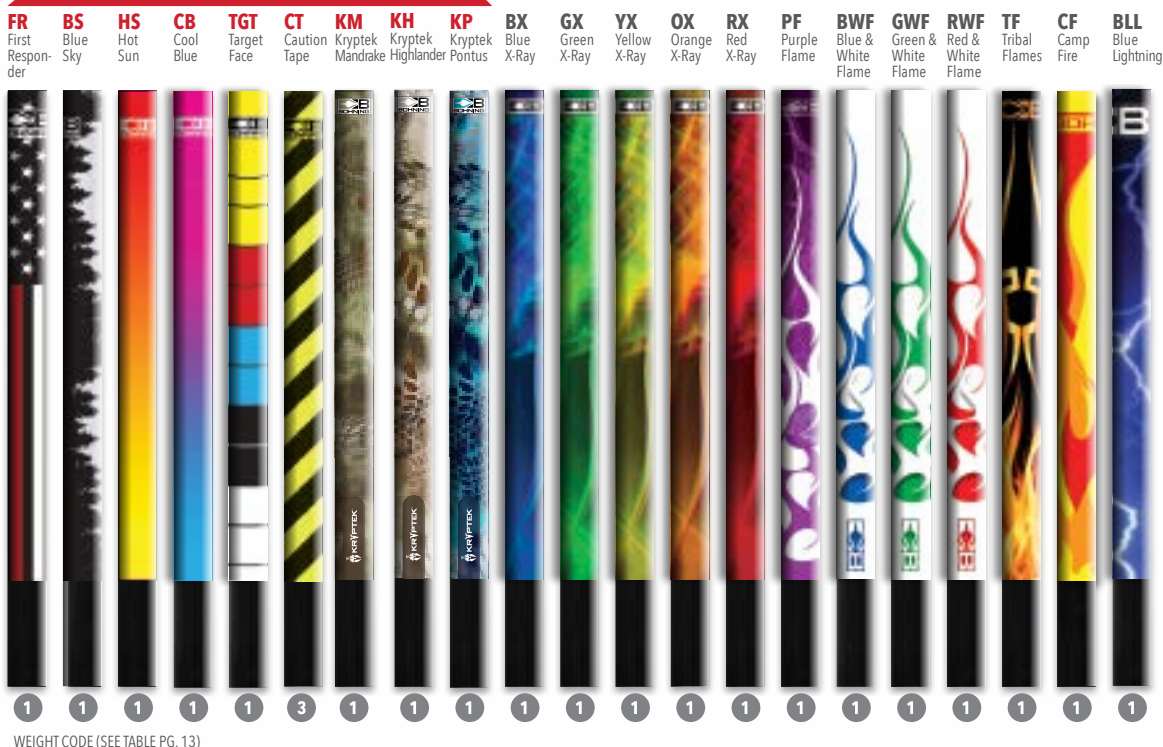

WEIGHT CODE (SEE TABLE PG. 13)

## HIGH DEFINITION WRAPS

WRAP AROUND  
NUMBER DECAL

- 16 sets of numbers 1-12
- Fits arrows up to standard diameter :  
19/64" / 0.296" (7.54mm)


**501012WA**0.5grains  
(32 mg)

## PRO TIP:

Excellent way to  
identify the best  
arrows in a set



## HIGH DEFINITION WRAPS

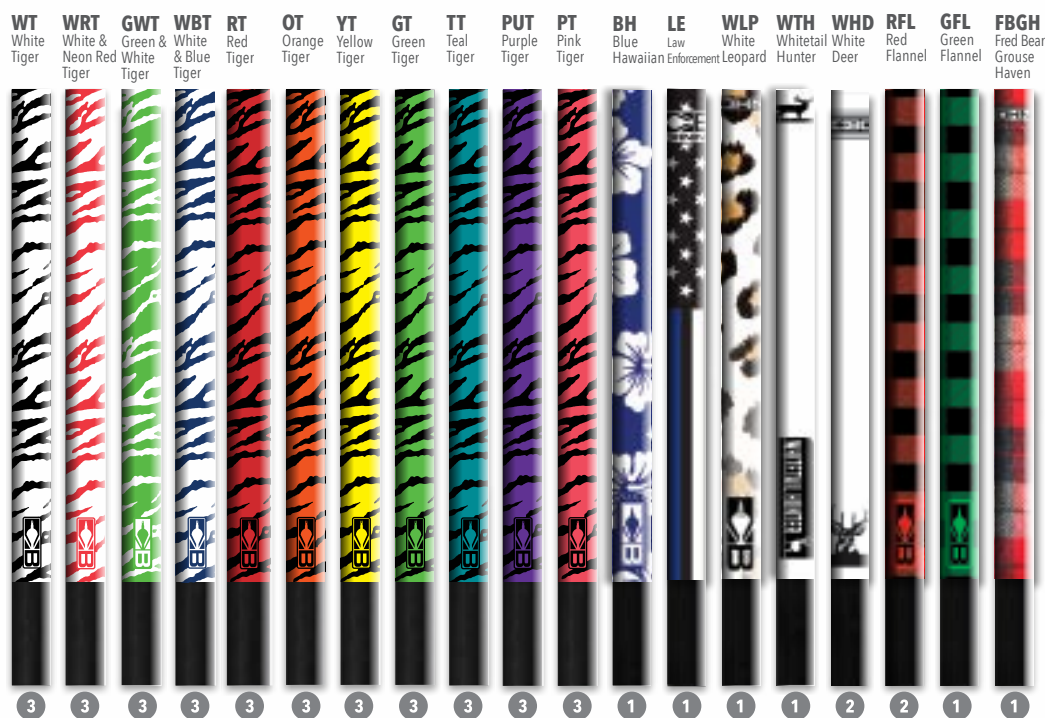


## WEIGHT CODE

WEIGHT OF SINGLE WRAP IN GRAINS

	1	2	3	4
<b>4" WRAP (101.6mm)</b>				
XS	4.2 gn (272 mg)	5.4 gn (350 mg)	8.4 gn (544 mg)	
SM	4.8 gn (311 mg)	6.2 gn (402 mg)	9.5 gn (616 mg)	
STND	6.0 gn (389 mg)	7.7 gn (499 mg)	11.9 gn (771 mg)	
LG	6.5 gn (421 mg)	8.4 gn (544 mg)	13.0 gn (842 mg)	
XL	7.2 gn (467 mg)	9.2 gn (596 mg)	14.3 gn (927 mg)	
<b>5.5" WRAP (139.7mm)</b>				
XS	5.8 gn (376 mg)	7.4 gn (480 mg)	11.5 gn (745 mg)	
SM	6.6 gn (428 mg)	8.5 gn (551 mg)	13.1 gn (849 mg)	
STND	8.3 gn (538 mg)	10.6 gn (687 mg)	16.4 gn (1063 mg)	
LG	9.0 gn (583 mg)	11.5 gn (745 mg)	17.8 gn (1153 mg)	
XL	9.9 gn (642 mg)	12.7 gn (823 mg)	19.7 gn (1277 mg)	
<b>7" WRAP (177.8mm)</b>				
XS	7.4 gn (480 mg)	9.4 gn (609 mg)	14.6 gn (946 mg)	
SM	8.4 gn (544 mg)	10.8 gn (700 mg)	16.7 gn (1082 mg)	
STND	10.5 gn (680 mg)	13.5 gn (875 mg)	20.9 gn (1354 mg)	
LG	11.4 gn (739 mg)	14.6 gn (946 mg)	22.7 gn (1471 mg)	
XL	12.6 gn (816 mg)	16.2 gn (1050 mg)	25.1 gn (1626 mg)	

## HIGH DEFINITION WRAPS

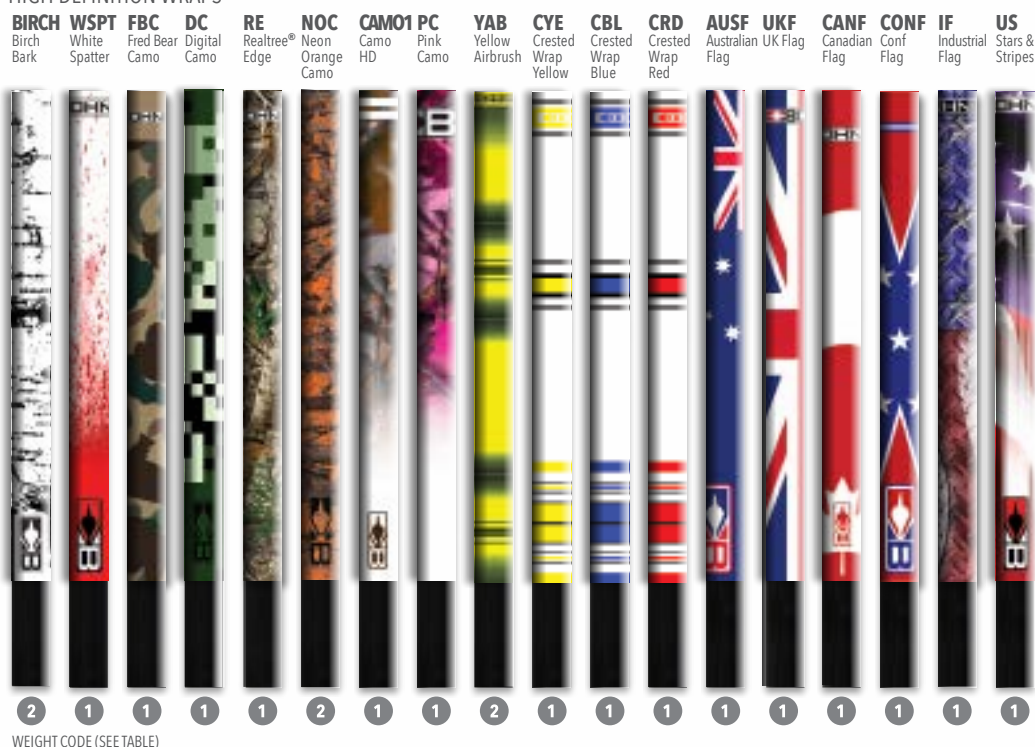

- 1 = HIGH DEFINITION MATERIAL  
2 = NEON MATERIAL  
3 = SOLID COLOR MATERIAL  
4 = REFLECTIVE MATERIAL

## PRO TIP:

Applying arrow wraps:

Ensure your hands are clean and free of contaminants that may adversely affect adhesion. Remove wrap from backing, placing wrap adhesive side up on a mouse pad or other semi-soft surface. Align shaft with the edge of the wrap and roll with steady motion and downward pressure. Once wrap is applied, roll the arrow between your hands to fully activate the adhesive. Place the index fletching over the wrap seam to help secure the wrap.

## VISI-WRAP

- 3 sets of 12 highly reflective decal wraps
  - Fits arrows up to standard diameter: 19/64" / 0.296" (7.54mm)
- 501018BL** – Bohning Logo  
**501018TS** – Tiger



18grains  
(117 mg)




## PRO TIP:


Great way to find arrows in poor lighting conditions

## ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS

### TRANSLUCENT COLOR CHOICES

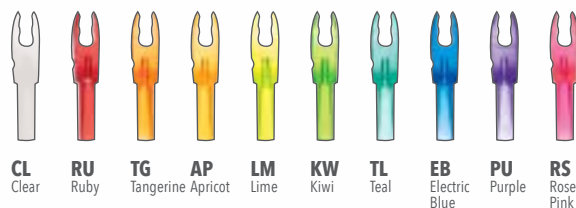

### SOLID COLOR CHOICES

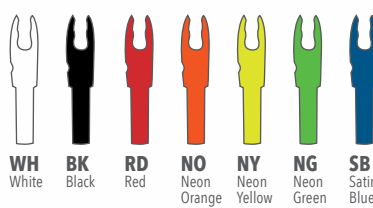

### PRO TIP:

**PRESS FIT NOCK INSTALLATION:**  
Using bowstring wax can be helpful for tight fitting nocks, simply apply wax to the nock shank, insert while rotating until the nock is in the appropriate position.

**NEVER** push the nock ears against a hard surface, use pliers to twist into place, or bite the nock.



Throat Size  
.120" (3.05 mm)  
6.5 grains (421 mg)

### F NOCK®

● Fits .166" shafts

- Double-lock throat

**10141** – 12 pk  
**10142** – 100 pk  
**10143** – 1000 pk



Throat Size  
.120" (3.05 mm)  
7.0 grains (454 mg)

### A NOCK®

● Fits .204" shafts

- Double-lock throat
- Raised index

**10151** – 12 pk  
**10152** – 100 pk  
**10153** – 1000 pk



Throat Size  
.120" (3.05 mm)  
8.0 grains (518 mg)

### H.E. NOCK

● Fits .231" shafts

- Double-lock throat
- Recessed index

**401023** – 12 pk  
**401024** – 100 pk  
**401025** – 1000 pk



Throat Size  
.120" (3.05 mm)  
9.0 grains (583 mg)

### BLAZER® NOCK

● Fits .246" shafts  
(standard carbon size)

- Double-lock throat
- Raised index

**1003** – 12 pk  
**1004** – 100 pk  
**1005** – 1000 pk



Throat Size  
.120" (3.05 mm)  
7.0 grains (583 mg)

### SMOOTH RELEASE INSERT NOCK

● Fits .246" shafts  
(standard carbon size)

- Single lock throat for ultimate accuracy
- Raised index

**401033** – 12 pk  
**401034** – 100 pk  
**401035** – 1000 pk



Throat Size  
.109" (2.77 mm)  
12.0 grains (778 mg)

### SIGNATURE® NOCK

● Fits .246" shafts  
(standard carbon size)

- Smooth throat
- Raised index

**1006** – 12 pk  
**1008** – 100 pk  
**1009** – 1000 pk



Standard Throat Size  
.120" (3.05 mm)  
5.0 grains (324 mg)

### BLAZER® PIN NOCK

#### Standard Throat

- Marked with the letter "V"
- Raised index

**10071** – 12 pk  
**10072** – 100 pk  
**10073** – 1000 pk



Small Throat Size  
.106" (2.69 mm)  
5.0 grains (324 mg)

#### Small Throat

- Marked with the letter "R"
- Raised index

**10161** – 12 pk  
**10162** – 100 pk  
**10163** – 1000 pk



Throat Size  
.120" (3.05 mm)  
5.0 grains (324 mg)

### SMOOTH RELEASE PIN NOCK

- Marked with letter "M"
- Redesigned to fit broader range of pin sizes
- Smooth throat and short ears
- Raised index

**401030** – 12 pk  
**401031** – 100 pk  
**401032** – 1000 pk



### PRO TIP:

**PIN NOCKS INSTALLATION:**  
**DO NOT** use excessive force to install the pin nock onto the adapter as this could cause cracks in the nock and lead to nock failure.



### PRO TIP:

All Bohning Pin nocks now accommodate a broader range of pin adapter brands!



### PRO TIP:

**INSPECTING YOUR NOCK**  
The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This of course could harm you and damage your equipment. When in doubt, replace the nock.





Throat size .115" (2.92 mm)  
Weight dependent on size - see below

### CLASSIC NOCK

- Glue-on nock for swaged end aluminum, wood and fiberglass shafts
- Index and alignment feature

#### AVAILABLE SIZES:

- 5/16" (7.93 mm)  
Avg. Weight: 10.0 grains (648 mg)
- 11/32" (8.73 mm)  
Avg. Weight: 13.0 grains (842 mg)

- 10131** – 12 pk
- 10132** – 100 pk
- 10133** – 1000 pk

#### TRANSLUCENT COLOR CHOICES




**AP** Apricot  
**LM** Lime  
**EB** Electric Blue  
**RS** Rose Pink

#### SOLID COLOR CHOICES



**WH** White  
**PL** Pearl  
**BK** Black  
**RD** Red  
**OR** Orange



**YE** Yellow  
**NB** Navy Blue  
**PU** Purple  
**BR** Brown



11.0 grains (713 mg)



9.0 grains (583 mg)

### CROSSBOW NOCK

- .300" Half Moon Nock** (7.70 mm)  
**401008** – 12 pk  
**401009** – 100 pk  
**401010** – 1000 pk
- .300" Flat Nock** (7.70 mm)  
**401014** – 12 pk  
**401015** – 100 pk  
**401016** – 1000 pk

#### SOLID COLOR CHOICES



**WH** White  
**BK** Black  
**NO** Neon Orange  
**NY** Neon Yellow  
**NG** Neon Green

Weight dependent on size - see below

### T NOCK


- Glue-on nock for swaged end aluminum, wood & fiberglass shafts

#### AVAILABLE SIZES:

- 1/4" T Nock (6.35 mm)  
Throat size: 0.105" (2.67 mm) Average Weight: 6.0 grains (388 mg)
- 9/32" T Nock (7.14 mm)  
Throat size: 0.115" (2.92 mm) Average Weight: 8.0 grains (519 mg)
- 5/16" T Nock (7.94 mm)  
Throat size: 0.115" (2.92 mm) Average Weight: 14.0 grains (907 mg)
- 11/32" T Nock (8.73 mm)  
Throat size: 0.105" (2.67 mm) Average Weight: 15.0 grains (972 mg)


- 1054T** – 12 pk
- 1055T** – 100 pk
- 1056T** – 1000 pk

#### SOLID COLOR CHOICES



**WH** White  
**YE** Yellow

#### TRANSLUCENT COLOR CHOICES



**AP** Apricot  
**LM** Lime  
**RS** Rose Pink




Throat size .118" (3 mm)  
8.5 grains (551 mg)

### APEX NOCK

- Glue-on nock for shafts with an O.D. of 0.197" (5 mm)

- 401007** – 1000 pk

#### TRANSLUCENT COLOR CHOICES



**AP** Apricot  
**LM** Lime  
**EB** Electric Blue

#### SOLID COLOR CHOICES



**WH** White  
**BK** Black  
**RD** Red  
**YE** Yellow



#### PRO TIP:

**T NOCK AND LEGEND NOCK:**  
To install, simply apply 3-4 drops of Fletch-Tite Platinum, Blazer Bond, or Fletch-Fuse to the tapered end of the shaft. Use light pressure, twist the swaged nock on to the tapered end one full rotation until fully seated.



Throat size .105" (2.67 mm)

### LEGEND NOCK

- Glue-on nock for swaged end aluminum, wood and fiberglass shafts

#### AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm)  
Average Weight 8.0 grains (519 mg)
- 5/16" Legend Nock (7.94 mm)  
Average Weight: 11.0 grains (713 mg)

- 1057** – 12 pk
- 1058** – 100 pk
- 1059** – 1000 pk

#### SOLID COLOR




**WH** White

#### TRANSLUCENT



**LM** Lime

# FLETCHING JIGS

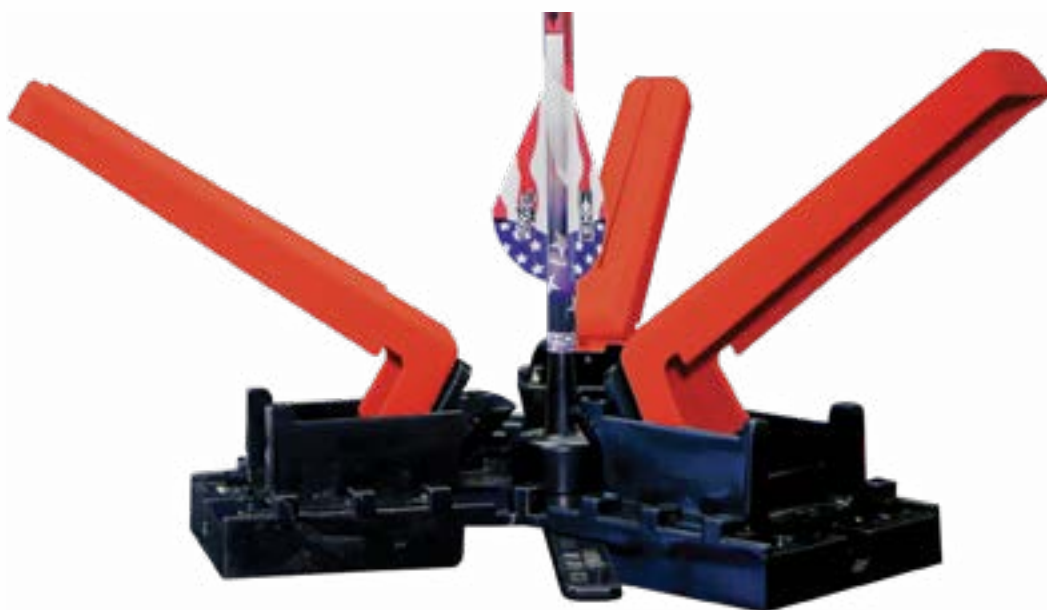

## PRO TIP:

### FAST, PRECISE AND VERSATILE:

Tower jigs fletch 3 vanes at once and apply more pressure than standard jigs.

One base with interchangeable arm options for feathers, plastic vanes, mylar vanes, or Impulse vanes. Choose from straight, one degree (*right or left*) two degree (*right or left*), or three degree (*right or left*) helical arms. Engineering-grade polymer allows you to soak arms in acetone (*up to 1 hour*) to remove CA glue build-up without damaging jig.

COLOR OF ARMS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART #
Gray (solid)	Plastic Vane	Straight	4" (101mm)	<b>1201</b>
Black	Plastic Vane	3° Right	3" (76mm)	<b>1202</b>
Red	Plastic Vane	1° Right	4" (101mm)	<b>1200</b>
Purple	Plastic Vane	3° Left	3" (76mm)	<b>601038</b>
Orange	Plastic Vane	1° Left	4" (101mm)	<b>601037</b>
Yellow	Thin Plastic Vane (e.g. Impulse™)	1° Right	4" (101mm)	<b>601007</b>
Gray w/ Red Clip	Mylar Vane	Straight	3.75" (95mm)	<b>601024</b>
Blue	Feather	2° Right	5" (127mm)	<b>601008R</b>
Green	Feather	2° Left	5" (127mm)	<b>601008L</b>

See page 43 for other Tower® Jig replacement parts

## TOWER® JIGS

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fletch all 3 vanes at once with precise 120° spacing
- Applies even pressure along the entire vane base
- Great for single or multiple vane repairs too!

### 601027 - COMPLETE TOWER®

- Great for clubs and families
- All the Tower® Jig components in one purchase

### 12962 - HELIX TOWER®

- Arms: Black, Purple
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

### 12963 - TRIPLE TOWER®

- Arms: Gray (solid), Black, Red
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

### 601010 - FEATHER TOWER®

- Arms: Blue, Green
- Center Posts: F Nock, Standard, Swedged

### 601001 - CROSSBOW TOWER®

- Arms: Black, Red
- Center Posts: Crossbow

### 601035 - MYLAR TOWER®

- Arms: Gray w/ red clip
- Center Posts: F Nock, Standard, Pin Nock

### 601006 - IMPULSE TOWER®

- Arms: Yellow
- Center Posts: F Nock, Standard, Pin Nock



## BLAZER® HELIX JIG

- 3° right helical on vanes up to 2.5" (63.5mm) long
- Fits standard shafts 0.293 - 0.306" (7.4 - 7.8mm) OD
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

**1344** - Blazer® Helix Jig



## BLAZER® STRAIGHT JIG

- Straight fletch on vanes up to 2.125" (54mm) long
- Fits shafts with 0.25" (6.3mm) OD or smaller
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

**1345** - Blazer® Straight Jig



## THE BIG JIG

- 3° right helical or 1° right offset on vanes up to 4" (101.6mm) long
- Fits standard shafts 0.293 - 0.306" (7.4 - 7.8mm) OD
- 3 or 4 fletch (4 at 90° or 60°x120° apart)

**1320** - The Big Jig



## PRO CLASS JIG

- Capable of 3 or 4 fletch (4 at 90° apart)
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm) long

**1348** - Straight  
**1349** - Right Wing  
**1350** - Left Wing



## PRO CLASS CLAMPS

**1351** - Straight  
**1352** - Right Wing  
**1353** - Left Wing  
**601020** - 1" (25cm) Vane Fletching Clamp - Griffin Vane



## MULTI-FLETCHER®

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Easy clean up – clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles

**601055** – Multi-Fletcher®

**601056** - Clamp Plate

### 🎯 PRO TIP:


**EASY CLEAN UP:**  
Clamp and inserts can be cleaned with acetone (up to one hour).

**DO NOT** use acetone to clean the other plastic parts.



### INSERTS INCLUDED WITH THE MULTI-FLETCHER:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART #
Gray	Plastic Vane	Straight	5" (127mm)	<b>601059</b>
Black	Plastic Vane	3° Right	3" (76mm)	<b>601057</b>
Red	Plastic Vane	1° Right	5" (127mm)	<b>601058</b>
Purple	Plastic Vane	3° Left	3" (76mm)	<b>601061</b>
Orange	Plastic Vane	1° Left	5" (127mm)	<b>601060</b>
Blue	Feather	2° Right	5" (127mm)	<b>601062</b>
Green	Feather	2° Left	5" (127mm)	<b>601063</b>

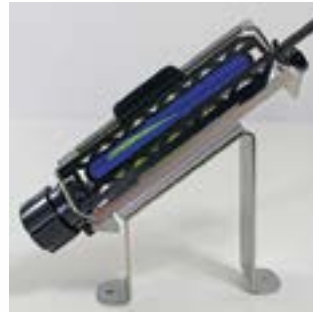

### 🎯 PRO TIP:

#### HELICALS AND OFFSETS ARE THE SAME THING!

Manufacturers use different ways of classifying helicals and offsets, which can be confusing when making comparisons. First of all, let's clarify that helicals and offsets are essentially the same thing. A helical is defined as any vane angle that is not a 0° straight fletch. An offset is, quite simply, a minor helical and usually refers to anything between 0° and 2°. A vane that is fletched at greater than 2° appears more twisted due to the way it wraps around the shaft, however, a vane fletched at less than 2° still has a helical "twist", it is just less noticeable.

## SCREW-IN

AVAILABLE IN 6, 12, 120, AND 1,200 PACKS (SPECIFY PACK SIZE WHEN ORDERING)

### BULLET POINTS AND CONCAVE POINTS



SUPERIOR CONCENTRICITY  
FOR A TRUE SPIN: GUARANTEED  
CONCENTRIC WITHIN 0.001"  
(0.025MM)

ENGINEERED FOR EASY  
REMOVAL FROM TARGET

INDUSTRY-LEADING WEIGHT  
TOLERANCES: GUARANTEED  
± 0.25 GRAINS (16.2 mg)




SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	BULLET PART #	CONCAVE PART #
17/64"	85 gn (5.5 g)	0.266" (6.75 mm)	851009	851091
	100 gn (6.5 g)		851010	851092
	125 gn (8.1 g)		851011	851093
9/32"	85 gn (5.5 g)	0.281" (7.14 mm)	851012	851076
	100 gn (6.5 g)		851013	851077
	125 gn (8.1 g)		851014	851078
19/64"	85 gn (5.5 g)	0.297" (7.54 mm)	851015	851079
	100 gn (6.5 g)		851016	851080
	125 gn (8.1 g)		851017	851081
5/16"	85 gn (5.5 g)	0.313" (7.94 mm)	851018	851082
	100 gn (6.5 g)		851019	851083
	125 gn (8.1 g)		851020	851084
21/64"	85 gn (5.5 g)	0.328" (8.33 mm)	NA	851085
	100 gn (6.5 g)		851021	851086
	125 gn (8.1 g)		851022	851087
11/32"	85 gn (5.5 g)	0.344" (8.73 mm)	NA	851088
	100 gn (6.5 g)		851023	851089
	125 gn (8.1 g)		851024	851090

### SCREW-IN POINT FIT GUIDE

PLACE YOUR SHAFT HERE

(start at largest diameter and move right until white dotted line is not visible)

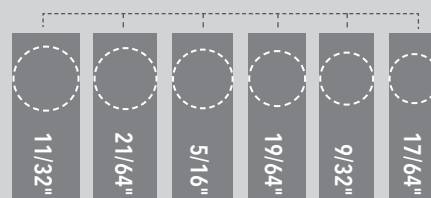

(see conversion chart below for metric)

### CONVERSION CHART

17/64"	0.266"	6.75 mm
9/32"	0.313"	7.14 mm
19/64"	0.296"	7.54 mm
5/16"	0.313"	7.95 mm
21/64"	0.328"	8.33 mm
11/32"	.0344"	8.74 mm

TO FIND OUT WHICH POINT FITS YOUR ARROW  
VISIT [WWW.BOHNING.COM](http://WWW.BOHNING.COM)

### PRO TIP:

Coat the threads of the screw-in point with a solid wax, like Tex-Tite, Seal-Tite, or Grit Guard, prior to installing as this will help prevent it from loosening.







## GLUE-IN

AVAILABLE IN 12 PACKS

### PIN POINTS

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
	100 gn (6.5 g)	Black Eagle®	851036
	150 gn (9.7 g)		851037
	180 gn (11.7 g)		851038
	120 gn (7.8 g)	Black Eagle®	851039
	180 gn (11.7 g)		851040
	210 gn (13.6 g)		851041
	250 gn (16.2 g)		851042
	100 gn (6.5 g)	Carbon Express®	851030
	120 gn (7.8 g)		851031
	150 gn (9.7 g)		851032
	180 gn (11.7 g)		851075
	120 gn (7.8 g)	Carbon Express®	851063
	150 gn (9.7 g)		851064
	180 gn (11.7 g)		851065
	100 gn (6.5 g)	Carbon Express®	851047
	120 gn (7.8 g)		851048
	150 gn (9.7 g)		851049
	150 gn (9.7 g)	Carbon Express®	851068
	180 gn (11.7 g)		851069
	210 gn (13.6 g)		851070
	250 gn (16.2 g)		851071
	150 gn (9.7 g)	Easton®	851001
	200 gn (13.0 g)		851002
	150 gn (9.7 g)	Easton®	851003
	200 gn (13 g)		851004
	150 gn (9.7 g)	Easton®	851005
	200 gn (13.0 g)		851006
	150 gn (9.7 g)	Easton®	851028
	200 gn (13.0 g)		851029
	200 gn (13.0 g)	Easton®	851007
	300 gn (19.4 g)		851008
	100 gn (6.5 mg)	Easton®	851094
	150 gn (9.7 mg)		851095
	180 gn (11.7 mg)		851096

### PIN POINTS (CONT.)

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART #
	100 gn (6.5 g)	Easton®	851033
	120 gn (7.8 g)		851034
	150 gn (9.7 g)		851035
	100 gn (6.5 g)	Easton®	851050
	150 gn (9.7 g)		851051
	180 gn (11.7 g)		851052
	150 gn (9.7 g)	Easton®	851066
	180 gn (11.7 g)		851067
	100 gn (6.5 g)	Gold Tip®	851053
	120 gn (7.8 g)		851054
	150 gn (9.7 g)		851055
	120 gn (7.8 g)	Gold Tip®	851072
	180 gn (11.7 g)		851073
	210 gn (13.6 g)		851074
	100 gn (6.5 g)	Victory®	851060
	150 gn (9.7 g)		851061
	180 gn (11.7 g)		851062
	100 gn (6.5 g)	Victory®	851056
	120 gn (7.8 g)		851057
	100 gn (6.5 g)	Victory®	851058
	120 gn (7.8 g)		851059
	120 gn (7.8 g)	Victory®	851043
	180 gn (11.7 g)		851044
	210 gn (13.6 g)		851045
	250 gn (16.2 g)		851046

#### PRO TIP:

To install glue in points use Ferr-L-Tite for aluminum arrows and Ferr-L-Tite Cool Flex for carbon arrows or carbon hybrid arrows.

### BREAK-OFF

SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	PART #
" data-bbox="512 800 541 952"/> 0.166"/4.22 mm Type I	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts up to 0.218" (5.54mm)	851025
" data-bbox="512 800 541 952"/> 0.166"/4.22 mm Type II	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.219"-0.228" (5.56 - 5.79mm)	851026
" data-bbox="512 800 541 952"/> 0.166"/4.22 mm Type III	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.229" (5.82mm) and up	851027

**NEW**

## ANCHOR KNOT

- Serve-less cable attachment for drop away rest cord
- Time Saver
- Durable construction
- Made in USA

**802001** – Anchor Knot

**802017** – 24 Anchor Knots

*This product is not designed to be served in. Doing so will result in damage to your strings.*

COLOR CHOICES



**BK**  
Black



**RD**  
Red



**BL**  
Blue



**PK**  
Pink



**PRO TIP:**

INSTALL A PEEP SIGHT IN 10 SECONDS!

Bohning's Serveless Peep It® and Anchor Knot are huge time savers because you don't need to serve them. No more accidentally cutting or burning your bowstring during the peep removal process!

**NEW**

## SERVE-LESS PEEP IT®

- Serve-less peep site
- Time saver installs without serving
- Durable construction
- Made in USA

SERVE-LESS PEEP IT

**802002** – 1/8"\*

**802003** – 3/16"

**802004** – 7/32"

**802005** – 1/4"

SERVE-LESS PEEP IT - 24 PACK

**802012** – 1/8"\*

**802016** – 3/16"

**802014** – 7/32"

**802015** – 1/4"

WITH ALIGNER\*

**802006** – 3/16"

**802007** – 7/32"

**802008** – 1/4"

WITH ALIGNER - 24 PACK\*

**802026** – 3/16"

**802027** – 7/32"

**802018** – 1/4"

THREADED\*

**802009** – 1/8"

**802010** – 1/4"

THREADED - 24 PACK\*

**802019** – 1/8"

**802011** – 1/4"

\* available in black (BK) only

*This product is not designed to be served in. Doing so will result in damage to your strings.*

COLOR CHOICES



**BK**  
Black



**RD**  
Red



**OR**  
Orange



**LM**  
Lime  
Green



**BL**  
Blue



**PU**  
Purple



**PK**  
Pink

WITH ALIGNER



**BK**  
Black

THREADED



**BK**  
Black



**PRO TIP:**

PERFECTLY ALIGNED FOR A CLEAR SIGHT PICTURE.

The Peep It® stays in place even better than a standard tied-in peep sight. It is also available as a Threaded Peep It, which accepts clarifiers, verifiers, and Peep It with aligner.

### CONVERSION CHART

1/8"	0.125"	3.18 mm
3/16"	0.187"	4.76 mm
7/32"	0.218"	5.54 mm
1/4"	0.250"	6.35 mm





### STRING NOCKS

- Creates a positive nocking point for consistent shots
- Quick and easy to install

**Hunter** (*black liner*):  
for 12-14 strand strings  
—5.4 grains (350 mg)

• **Cam** (*red liner*):  
for 16-18 strand strings  
—7.4 grains (480 mg)

#### Cam String Nocks

**1065** – 6 pk  
**1068** – 100 pk  
**1071** – 1000 pk

#### Hunter String Nocks

**1064** – 6 pk  
**1067** – 100 pk  
**1070** – 1000 pk



### STRING WHISKERS

- Two pieces per package, 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

**1051** – 1Pair  
**1635** – 50 Pair



### CINCH SLING

- Easily adjustable to fit over bare hand or gloves
- Base plate allows for the stabilizer to be torqued without rotating out of place
- Stays open for ease of use

**801049BK** – Cinch Sling  
**15211** – 12 pk (bulk)



### STRING SEPARATOR

- Fast and easy installation of serving, peeps, silencers, etc.
- Easily inserts into strands without damaging, twist into separate strings
- 2" (50.58mm) x .625" (15.87mm) x 1" (25.4mm)

**1601** – Separator



### KISSER BUTTON

- Helps maintain a consistent anchor point every shot
- Lightweight and durable, 0.5" (12.7 mm) diameter
- Easy installation with 2 enclosed clips


**1664** – Kissers w/ clips  
**801081** – 100 pk



### "SLIM" PEEP

- Durable, high-impact and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm) tubing, bulk peeps do not

**1668** – Peep with tube  
**1640** – 50 pk (peep only)

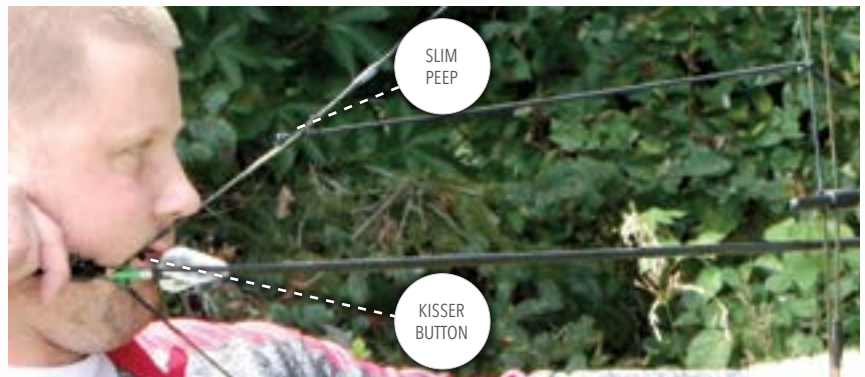

# STRING CARE



## SEAL-TITE®

- **Silicone-based** bowstring wax
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Vegan

**1360** – 0.92 oz (28 grams)

**1631** – 24 tubes

**1631BOWL** - Bowl and 24pk

**35001** – 250 tubes

**3500** – 500 tubes

**1360Box** – 1 box 1.41 oz (40 grams)

**1631Box** – 24 boxes

**35001Box** – 250 boxes

**3500Box** – 500 boxes



## TEX-TITE®

- **Natural-based** bowstring wax
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

**1306** – 0.92 oz (28 grams)

**1630** – 24 tubes

**1630BOWL** - Bowl and 24pk

**32001** – 250 tubes

**3200** – 500 tubes

**1306Box** – 1 box 1.41 oz (40 grams)

**1630Box** – 24 boxes

**32001Box** – 250 boxes

**3200Box** – 500 boxes



## XCCELERATOR WAX®

- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

**1365** – 0.51 oz (14.5 grams) tube

**1634** – 16 tubes

**1634BOWL** - Bowl and 24pk



## STRING SHIELD®

- Silicone-based liquid wax
- Sponge-top applicator
- Odorless and waterproof
- Vegan

**301019** – 1.18 oz (35 ml) tube



## GRIT GUARD™

- **Non-tacky** bowstring wax formula prevents dirt from collecting on strings
- Odorless and waterproof
- Premium conditioners
- Convenient drop side box container made from 100% recycled plastic
- Vegan

**301026** – 1 box 1.41 oz (40 grams)



**PRO TIP:**  
STRING SHIELD'S™ liquid formula penetrates fibers of individual strands on string.

🔗 **PRO TIP:** SEAL-TITE® and TEX-TITE® are available in convenient and simple to use drop side boxes for the easiest bow string wax application on the market. No more wax melting out of a tube and all over your bow case and expensive equipment.

- 🔗 **PRO TIP:** OTHER USES FOR SEAL-TITE®, TEX-TITE®, AND GRIT GUARD™
- Apply to nock shank on press-fit nocks for easier insertion and indexing.
  - Apply to pin bushings for easier installation and indexing of tight-fitting pin nocks.
  - Apply to point and broadhead threads to keep them from loosening and to help prevent rust.

## BOWSTRING APPLICATION:

SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD
<b>STEP 1 (ALL WAXES):</b> Start with a clean string: using a rag dipped in warm water, or by wrapping a serving thread around the string and moving it up and down, remove dirt and old wax.				
SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD · SEAL-TITE BOX · TEX-TITE BOX
<b>STEP 2:</b> Warm the tube of wax by rolling it between your hands. Remove the lid and push or twist the bottom to move the wax up in the tube. Apply wax liberally to bowstrings. Rub wax into the string fibers briskly using your fingers or a leather strip - as wax warms, it melts into the string fibers.			<b>Step 2:</b> Apply thin coat to bowstring using the foam applicator	<b>Step 2:</b> Lower the sides of the applicator box and apply wax liberally to bowstrings. Rub wax into string fibers using your fingers or leather strip - as the wax warms, it melts into the string fibers





## POWERGRIP

- A blend of tightly braided Spectra and nylon yarn
- Resin coated for durability and good grip
- 0.021" (0.53mm)  
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)  
Contains 50 yards (45.7 m)

**801034** – 0.021" (0.53mm)

**801035** – 0.025" (0.64mm)



## HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" (0.36mm) white turns clear when served tightly
- 0.014" (0.53mm)  
Contains 120 yards (109.7 m)
- 0.021" (0.64mm)  
Contains 75 yards (68.6 m)
- 0.024" (0.64mm)  
Contains 45 yards (41.1 m)

**801031** – 0.014" (0.36mm)

**801032** – 0.021" (0.53mm)

**801033** – 0.024" (0.61mm)

### COLOR CHOICES



**WH**  
White

**NO**  
Neon  
Orange

**NG**  
Neon  
Green



**BL**  
Blue



**RD**  
Red



**BK**  
Black



## POLYGRIP

- Superior grip
- 100% polyester
- 0.020" (0.53mm)  
Contains 75 yards (68.6 m)

**1624** – 0.021" (0.53mm)



## #62 XS SERVING THREAD

- 20% stronger than regular serving thread
- 0.018" (0.46mm)  
Contains 100 yards (91.4 m)
- 0.021" (0.53mm)  
Contains 75 yards (68.6 m)

**801001** – 0.021" (0.53mm)

**801010** – 0.018" (0.46mm)

### COLOR CHOICES



**BK**  
Black

**RD**  
Red

**NG**  
Neon  
Green



## NYLON SERVING THREAD

- Traditional nylon serving thread
- Use for end serving, peeps and nocks
- 0.018" (0.46mm)  
Contains 100 yards (91.4 m)

**1616** – 0.018" (0.46mm)



## LOOP ROPE

- 0.196" (2.0 mm) BCY #24 polyester D-loop rope

**801002** – 39" (1m)

**801003** – 100 ft (30.5m)

### COLOR CHOICES



**BK**  
Black

**RD**  
Red

**NG**  
Neon  
Green



**BL**  
Blue



## CROSSBOW SERVING THREAD

- Designed for high performance crossbow strings
- 0.030" (0.76mm)  
Contains 45 yards (41.1 m)

**801011BK** – 0.030" (0.76mm)



## #62 BRAID SERVING THREAD

- Braided for superior grip and durability
- 0.021" (0.53mm)  
Contains 75 yards (68.6 m)
- 0.025" (0.64mm)  
Contains 60 yards (54.9 m)

**1626** – 0.021" (0.53mm)

**1627** – 0.025" (0.64mm)



## MINI-SERVER®

- Great for travel and quick fixes
- Eliminates the need for a cable spreader
- 2.06" x 1.4" x 0.875" (52.4 x 35.6 x 22.2 mm)
- Contains 27' (8.2 m) of #62XS 0.021" (0.53mm) serving in black and white

**801017** – Server

**801024BW** – 2 pk spool replacement



## SERVE-TITE

- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- Contains 75 yards (68.6m)

**16240** – Serve-Tite w/ Polygrip 0.020" (0.53mm)

**16150** – Tool Only



Bohning celebrates its place as an Archery Legacy Manufacturer, part of the tradition for 75 years. In 1946, Rollin Bohning put down roots in an area esteemed for its natural beauty, turning his passion for archery and innovation into a business that still operates in the same location. We don't just look to our past though - sharing the dedication of the millions of archers across the world, we continue to perfect our craft as we look ahead to the next 75 years.





Rollin Bohning - 1940's



DJ Hunt - 2020

A TRADITION OF INNOVATION SINCE 1946





## PRO TIP:

### CHOOSING AN ADHESIVE

When choosing an adhesive, it is always best practice to choose one that has been tested and proven to work best for your application. Bohning adhesives have been tested over thousands of fletches, nocks and inserts. For the best performance of your adhesives, be aware of several factors that may affect adhesion, including: humidity, application, and time required for cure.



## PRO TIP:

### BASIC FLETCHING INSTRUCTIONS:

1. Make sure that jig is correctly set up so that the clamp/arm seats firmly to the shaft for the entire length of the vane. Test this by dry fitting shaft and vane in jig without glue.
2. Place vane at the desired height in the clamp/arm to get desired distance from the nock.
3. For Fletch-Tite Platinum apply adhesive over the entire vane base. For Blazer Bond and Fletch-Fuse apply several dots of adhesive along the vane base and then use the tip of the bottle to spread the adhesive along the length of the base.
4. Clamp the vane in the jig for 5 minutes for Fletch-Tite Platinum, 20 seconds for Blazer Bond and 30 seconds for Fletch-Fuse.
5. Carefully remove arrow from the jig, and allow Fletch-Tite Platinum to cure for 24-48 hours, Blazer Bond and Fletch-Fuse for 2 hours before use.

### ADHESION TROUBLE-SHOOTING

The best prevention for adhesion problems is to properly clean your arrows using Bohning SSR Powder. **\*\*DO NOT** clean Bohning Vanes. Follow the correct clamp and cure time for the adhesive that you are using.

Make sure your fletching area and hands are free from spray lubricants, dust, pet hair, greasy food, chemicals or aerosol sprays.

Use the correct amount of adhesive based on the adhesive type.

Clean your jig frequently. For Bohning jigs, a short soak of the arm/clamp/insert in acetone will remove excessive adhesive. Never use a knife to scrape off excess glue. This will cause damage to the jig.

### IDENTIFYING FLETCHING ADHESION PROBLEMS

If fletching fails with adhesive remaining on the shaft but not on the fletch, this indicates an incompatibility between the adhesive and the fletch. Ensure the adhesive you have chosen is the correct choice for your fletch.

If the fletching fails with adhesive remaining on the vanes but not the shaft, this would indicate a problem with the arrow shaft. Start by cleaning the arrow shaft using the Bohning SSR Powder, making sure to rough up the shaft surface and then rinse with hot water and allow to dry.

If the fletching fails with the adhesive remaining on both the vane and the shaft, this could indicate a setup problem with the jig, a damaged clamp, inadequate adhesive curing or a possible contamination on the shaft or vanes.



## ADHESIVES

**FLETCH-TITE PLATINUM®**

- Solvent-based glue designed for vanes, feathers and swedged nocks
- Works on carbon, aluminum, wood, fiberglass, wraps and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 49
- Industry standard for over 70 years

**1301** – 3/4 oz Tube (22.1 ml)    **1356** – Pint (473.1 ml)

**301040** – 40 pk

**301030** – 200 pk

**301006EQ** – 6 pk\*

**301040EQ** – 40 pk\*

**301030EQ** – 200 pk\*

**1357** – Quart (946.4 ml)

**1358** – Gallon (3.79 l)

\*Packed to meet "Excepted Quantities" International ocean and air transportation requirements in order to reduce dangerous goods fees.

**WARNING:** Cancer and Reproductive Harm.  
www.P65Warnings.ca.gov.

**FLETCH FUSE™**

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 30 seconds, cure time 2 hours
- Budget-friendly

**301025** – 1/2 oz Bottle  
(17.2 ml)

**INSERT IRON™**

- Designed for points and inserts
- Works on all shaft types
- 48 hour cure time (72 hours if air is dry)

**1317** – 1 oz Bottle  
(29.6 ml)

**BLAZER BOND®**

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 20 seconds, cure time 2 hours
- Use a very thin bead or several dots spread out for best adhesion
- Works well in humid conditions

**301015** – 1/2 oz Bottle  
(17.2 ml)

**301016** – 1 oz Bottle  
(29.6 ml)

**DISPENSER BOTTLES**

- 2 oz (59.1 ml) bottle for use with Fletch-Tite Platinum
- Deluxe bottle has a smaller opening for easier/ cleaner application

**1303** – Regular

**1304** – 6 pk regular (red) replacement nozzles and caps

**13031** – Deluxe

**13032** – 6 pk deluxe (white) replacement nozzles and caps

## CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
<b>FLETCH-TITE PLATINUM</b>	Vanes Feathers Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	5 Minutes	Minimum: 24 hours 48 hours is best

## USEFUL INFORMATION:

- Flexible (non-brittle) bond - absorbs shock when shooting into a target repeatedly
- Does not crack or become brittle.
- Along with other applications, use this glue on tip and tail of vanes or feathers for added security.
- Easy jig clean-up - simply scrape glue off. Do not use knife or any sharp instruments
- Best in low humidity applications.
- Two year expiration on unopened tubes.
- Do NOT store solvent-based adhesives in the refrigerator.

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
<b>BLAZER® BOND**</b>	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	20 Seconds	2 Hours

## USEFUL INFORMATION:

- Fastest curing time.
- Instant, rigid-bonding glue.
- Medium viscosity (Bohning's most liquid CA glue).
- Begins curing on contact.
- Best for high humidity application.
- One year expiration on unopened tubes.

\*\* All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
<b>FLETCH FUSE**</b>	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	30 Seconds	2 Hours

## USEFUL INFORMATION:

- Instant, rigid-bonding glue
- Medium viscosity (thicker than Blazer Bond)
- Begins curing on contact
- Best for high humidity application
- One year expiration on unopened tubes

\*\* All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
<b>INSERT IRON</b>	Points Inserts Outserts	Carbon Cedar Aluminum Fiberglass	n/a	48 Hours (72 Hours if air is dry)

## USEFUL INFORMATION:

- Strongest glue.
- Insert Iron expands when curing. Hold point or insert in place while curing
- Cures with moisture - best when applied in humid conditions
- One year expiration on unopened bottles
- Do NOT store in the refrigerator

## HOT MELT ADHESIVES

**FERR-L-TITE®**

- Designed for points and inserts
- Recommended for wood and aluminum shafts
- Not for carbon shafts
- Heat-reversible on aluminum shafts—high temperature required
- Melting point of 350°F (176.7°C)
- Industry standard for 75 years

**1309** – 12 Gram Stick**1339** – 1 lb. Brick (453.6 g)**1633** – 16 Sticks (Bulk)**31001** – 250 Sticks (Bulk)**FERR-L-TITE  
COOL FLEX®**

- Designed for points, inserts and bushings
- Recommended for carbon, aluminum and fiberglass shafts
- Fully cured when it reaches room temperature
- Use hot water for adjustment, replacement or removal
- Melting point of 280°F (137.8°C)

**1308** – 12 Gram Stick**1368** – 1 lb. Brick (453.6 g)**13081** – 16 Sticks (Bulk)**13082** – 250 Sticks (Bulk)**ALCOHOL  
BURNER**

- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

**1315** – Burner**1316** – Replacement wick

## CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE	Points Inserts Outserts	Cedar Aluminum	n/a	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive. • No expiration.				

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE COOL FLEX	Points Inserts Outserts Pin Bushings	Carbon Aluminum Fiberglass	N/A	As soon as it has reached room temperature (approx. 5 minutes)
USEFUL INFORMATION: • Hot melt adhesive (low melt) • Heat reversible on aluminum shafts - flame required • No expiration.				

## TAPE

**PREMIUM  
FLETCHING TAPE**

- Designed for feathers and mylar vanes
- Works on all shaft types
- Length 60' (18.3m), width 0.188" (4.8mm)
- Machine-cut without lubricant so no dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers

**1649****FLETCHING TAPE  
DISPENSER**

- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris
- Refillable; includes 1 roll of premium fletching tape
- Screw holes for easy mounting

**801099**

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCHING TAPE	Feathers Mylar Vanes	All	N/A	Immediate
USEFUL INFORMATION • Pressure sensitive adhesive • No expiration				





### THE STRIPPER

- Strips your arrow shaft of fletchings, glue, and arrow wraps
- Safe cutting angle for all shaft types
- Replacement blades sold separately

**1524** – Stripper

**15240** – Blades: 3pk



### THE STRIP-PRO

- 2 blades for ergonomic versatility
- Heavy-duty handle and steel blade
- Easily strip your arrow shaft of fletchings, glue, and arrow wraps
- Replacement blades sold separately

**801025LM** – Strip-Pro

**801026** – Blades: 3pk



### SSR

- Concentrated cleaning powder removes dirt, grease, residue and contaminants
- For carbon, aluminum and fiberglass shafts
- Use on a scour pad with hot water to scrub, then rinse

**801052** – Single-use pk - 1 tsp (4.9 ml)

**801053** – Shaker bottle -2.65 oz (78.4 ml)



### PRO TIP

#### TO REMOVE FLETCHINGS:

Use "The Stripper" or the "Strip-Pro" by Bohning to strip the fletchings from arrow shafts. Clean with SSR powder on a scour pad to prepare for new fletching.



### PRO TIP:

#### 3 WAYS TO REMOVE WRAPS:

1. Use "The Stripper" or the "Strip-Pro" to remove the wrap.
2. Use a hair dryer to soften the adhesive and peel the wrap.
3. Use boiling water to soak the wrapped arrow shafts in and peel the wrap off once softened.

*To remove remaining wrap adhesive, use SSR powder on a scour pad in hot water to scrub off.*

## SHOOTER STOOL

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

**701058BK** – Stool with arrow tubes/umbrella holder

**701055BK** – Stool only



### PRO TIP:

STOOL CAPACITY:  
300 pounds  
(136 kg)



BUILT IN  
COOLER







**PRO TIP:**  
New, internal wear guard for a sleeker design.

### SLIP-ON ARMGUARD

- Durable yet flexible and soft compression-fit material
- Easy on and off; protects the entire forearm

**801009**

SLIP-ON ARMGUARD SIZING (APPROXIMATE)					
SIZE	LENGTH	SMALL END RELAXED	LARGE END RELAXED	SMALL END STRETCHED	LARGE END STRETCHED
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)
M	9" (22.9 cm)	7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)

#### COLOR CHOICES



**PU** Purple  
**HP** Hot Pink  
**RD** Red  
**NO** Neon Orange



**NG** Neon Green  
**BL** Blue  
**BK** Black  
**CAMO** Camo



### WEB ARMGUARD

- Open design for maximum ventilation
- Durable and flexible, with adjustable elastic bands for easy on and off

**801040BK**



### D-FLECTOR ARMGUARD

- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center

**801092**

#### SOLID COLOR CHOICES



**WH** White  
**BK** Black  
**NY** Neon Yellow

#### TRANSLUCENT COLOR CHOICES



**RU** Ruby  
**TG** Tangerine  
**KW** Kiwi  
**TL** Teal



**EB** Electric Blue  
**PU** Purple  
**RS** Rose Pink



### 3-STRAP ARMGUARD

- Made of heavy-duty cordura – double stitched to prevent fraying
- Protects arm and holds loose clothing away from bow strings
- Adjustable quick disconnect buckle straps

**1689**

## ADULT BOW CASE

- Dimensions: 44.5" (113.0 cm) x 19.5" (49.5 cm)
- Fits bows up to 37" (94cm) axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura® Nylon

**701037**



**GYBL**  
Gray and Blue



**GYRD**  
Gray and Red



**BK**  
Black Sky

**NEW**

BLACK SKY EDITION



Large zippered interior mesh pocket

ADULT BOW CASE INTERIOR - COLOR MAY VARY  
Interior dimensions: 43.5" x 18" (110.5 cm x 45.7 cm)

## THE SHELTER

### BOW CASE

- Dimensions: 46" (116.8 cm) x 18.5" (47.0 cm)
- 4 outer pockets, including one arrow pocket

**701045CAMO** – The Shelter, Sling/Case Combo

**701043CAMO** – Case Only

### SLING

- Fits bows from 28" (71 cm) to 38" (97 cm) axle to axle
- 2 outer accessory pockets
- 2 end clips for added security

**701044BK** – Bow Sling Only



SHELTER BOW CASE INTERIOR  
Interior dimensions: 44.5" x 18" (113.0 cm x 45.7 cm)

USE CARRYING HANDLE, STRAP, OR SLING. PERFECT WAY TO CARRY AND PROTECT YOUR BOW.



CASE



STRAP



SLING



## YOUTH BOW CASE

- Dimensions: 40" (101.6 cm) x 15.8" (40.1 cm)
- Fits most youth bows (including Genesis®)
- Outer arrow storage pocket and 3 zippered interior pockets

701036

**PRO TIP:**  
Matching Tube Quiver available!



**GYTL**  
Gray and Teal



**BKCA**  
Black and Camo



**GYOR**  
Gray and Neon Orange



Three zippered interior mesh pockets

YOUTH BOW CASE INTERIOR  
Interior dimensions: 38" x 15" (96.5 cm x 38.1 cm)

## TUBE QUIVER

- Dimensions: 19" x 1.5" (49.5 cm x 3.8 mm)
- 2 high capacity, durable, solid base arrow tubes
  - Each tube easily fits 6 STD sized arrows
- Ambidextrous
- Mesh storage pocket

701029



**GYTL**  
Gray and Teal



**BKCA**  
Black and Camo



**GYOR**  
Gray and Neon Orange

(2) Arrow Tubes: 18" + (457 cm) long - 1.2" (30 cm) I.D.





## ADULT TARGET QUIVER

- 4 high capacity, durable, solid base arrow tubes  
- Each tube easily fits 6 STD sized arrows
- 2 zippered storage compartments:
- Easy to access mesh and pencil storage areas
- Constructed with premium Cordura® and Ripstop nylons
- Superior durability and water repellent
- Fits up to 3" (76 cm) belt

**701041BK**



**NEW**



### Arrow Tubes:

17" (432 cm) long - 1.2" (30 cm) I.D.

### Main Pocket:

11" (279 cm) x 5" (127 cm)

### Upper Pocket:

4.5" (114 cm) x 5" (127 cm)



## ACCESSORY POUCH

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant
- Strong and comfortable belt Loop - Fits up to 2.5" (64 cm) belt

**701040BK**



### Dimensions:

6.25" (159cm) Width

5.75" (146cm) Height

3.5" (89cm) Depth

**NEW**



## ADULT FIELD QUIVER

- Can be right or left handed
- Double zippered, large interior pocket
- Adjustable arrow angle
- Loop for bow pod
- Multiple pencil/pen locations

**701042BK**



**NEW**

AVAILABLE SPRING 2021



**POCKET QUIVER**

- Dimensions: 3.75" x 5.125" x 1.25"  
(95.3 mm x 133.4 mm x 31.8 mm)
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Made in USA

**201035BK** - Pocket Quiver

**Replacement Parts**

**201036** - Body

**201037** - Clip

**201038** - Retainer Cap



Securely holds 6 arrows or bolts

**NEW**

AVAILABLE SPRING 2021



## BRUIN

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with the Lever-Lock mounting system

**201030** – Indicate hood and liner color

### HOOD COLOR CHOICES



**BK**  
Black



**CF**  
Carbon  
Fiber



**MOC**  
Mossy Oak®  
Break-up  
Country



**RX**  
Realtree®  
Extra



**RE**  
Realtree®  
Edge

### LINER COLOR CHOICES



**BK**  
Black



**RD\***  
Red

\* Red liner available only with  
black or carbon fiber hoods



FITS ALL  
ARROW  
SIZES



## LYNX®

- Dual-retainer quiver
- Molded hood and liner for quiet storage of any broadhead style
- Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

**1038** – Black

**201013RX** – Realtree® Xtra

**201013RE** – Realtree Edge®

**201013MOC** – Mossy Oak® Break-Up Country

### HOOD COLOR CHOICES



**BK**  
Black



**RX**  
Realtree®  
Xtra



**RE**  
Realtree®  
Edge



**MOC**  
Mossy Oak®  
Break-up  
Country



## LEVER LOCK

- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click)

**1073** – Lever Lock








### UNIVERSAL ARROW BOX

- Each box holds 12 arrows, up to 36" (91 cm)
- Dimensions: 36.5" x 6" x 2.5"  
(93 cm x 15 cm x 6 cm)

**1623** – 50 pk

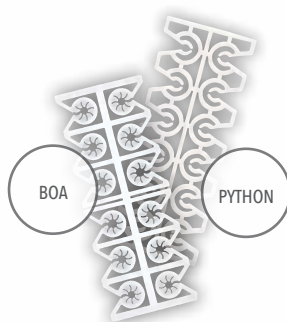

### "BOA" AND "PYTHON" ARROW PADS

- Boa holds 12 arrows of any size
- Python holds 12 arrows  
Sizes .219" (5.56 mm) to .359" (9.12 mm)

**16092** – Boa  
**801047** – Python



### ARROW PEN FERRULES

- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to PaperMate® 1.0mm (not included)

**990004BK**



### PRO TIP:

Turn arrow scraps into fletching showpieces. Our Arrow Pen Ferrules easily turn a broken arrow piece into a sellable product, or an advertising tool.

**NEW**  
IMPROVED DESIGN



### BROADHEAD WRENCH

- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point

**1619**



### BOW GRIP/SIGHT WINDOW PAD

- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak® Break-Up Infinity

**1602** – 2 Pads



### WIND CHECK

- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy one-hand use

**1612** – 0.21 oz (6 grams)



### ARROW LUBE

- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based

**301023** – 1.18 oz (35 ml) tube

# CROSSBOW



## CROSSBOW LUBE KIT

- Includes:
  - 1 tube of Lightning Lube – 1.18 oz (35 ml)
  - 1 tube of Xccelerator Wax – 0.57 oz (16.1 grams)

**801005**



## LIGHTNING LUBE™

- Silicone-based, odorless rail lube
- No-mess foam applicator
- Provides a protective film for reduced friction and increased velocity

**1363** – 1.18 oz (35 ml) tube

**941019** – 16 pk bulk

**941019BOWL** - Bowl and 24 pk



## TOP MOUNT

- Parallel quiver mounting system
- Installs easily to the right or left side of the sight rail without removing the scope
- Slim and adjustable design allows for easy access to arrows and reduction in forward weight of crossbow
- Includes both allen head and thumb screw

**801012**



## MULTI-FLETCHER®

- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Capable of fletching crossbow bolts up to 0.42" (10.7 mm) OD
- Can fletch 1° to 3° right, 1° to 3° left, or straight
- See page 19 for more information

**601055** – Multi-Fletcher®



## CROSSBOW TOWER®

- Capable of fletching crossbow bolts up to 0.35" (8.9 mm) OD
- Can fletch bolts either 1° right offset or 3° right helical
- See page 18 for more information

**601001** – Crossbow Tower®



## CROSSBOW

**BOLT™ VANE**

- See page 13 for more information

**101033** – 36 pk  
**101034** – 100 pk  
**101035** – 1000 pk

**CROSSBOW  
SERVING THREAD**

- See page 25w3 for more information

**801011BK**

**CROSSBOW NOCKS**


- See page 17 for more information

**.300" Half Moon Nock** (7.70 mm)

**401008** – 12 pk  
**401009** – 100 pk  
**401010** – 1000 pk

**.300" Flat Nock** (7.70 mm)

**401014** – 12 pk  
**401015** – 100 pk  
**401016** – 1000 pk

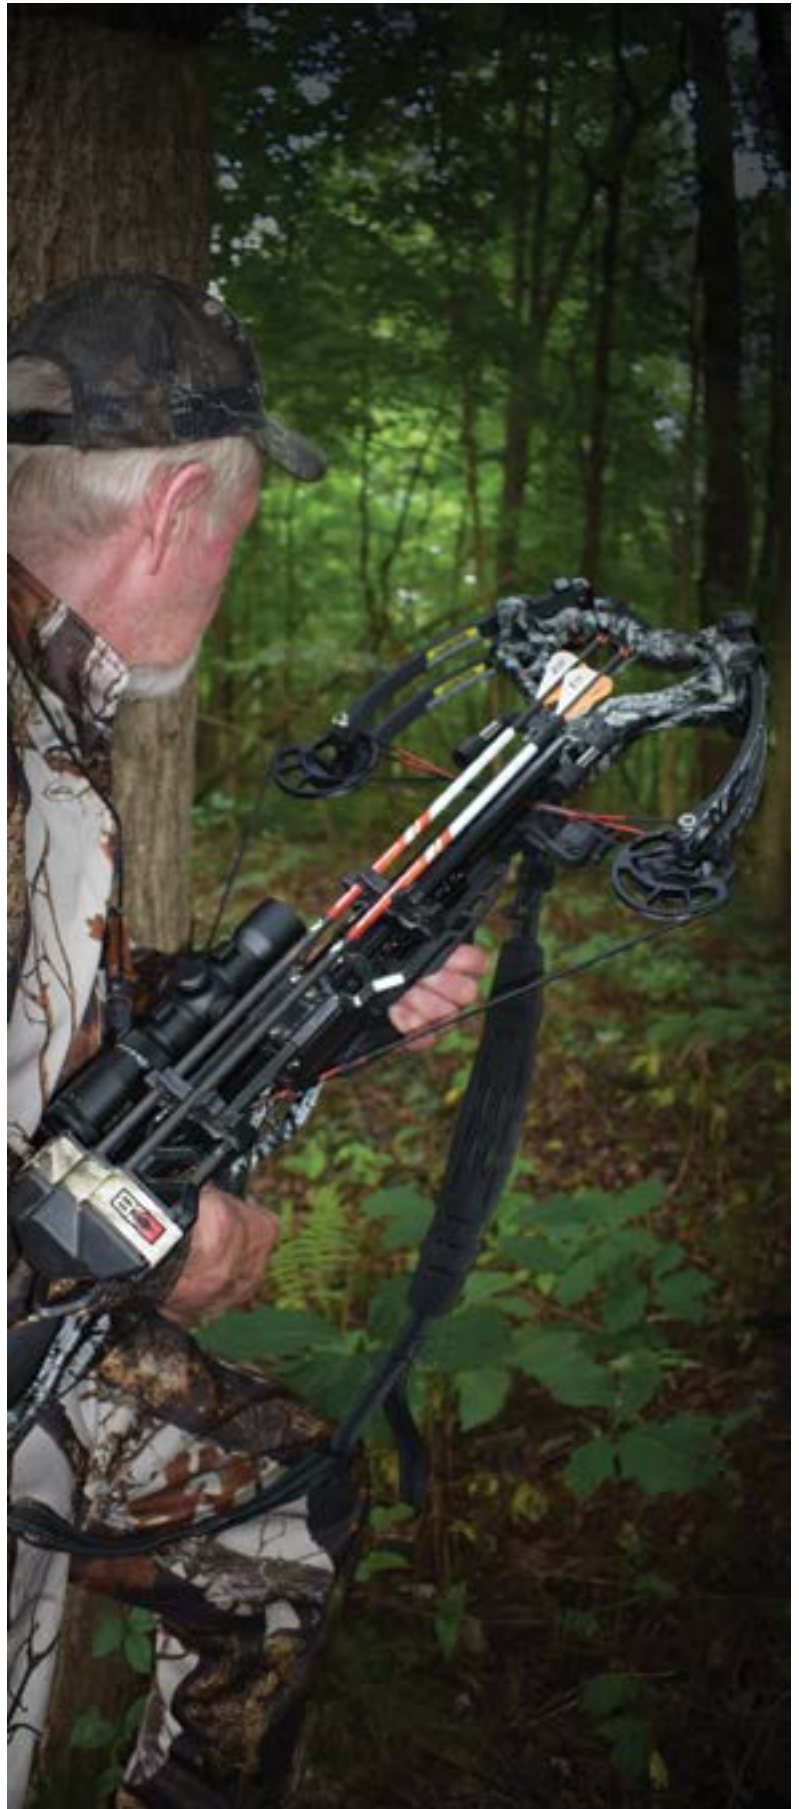

# TRADITIONAL

# TRADITIONAL

## PROFESSIONAL CRESTING KIT

- The kit includes:
  - One crester (made with maple wood)
  - Six 1 oz jars of Crest-Lac paint: black, red, yellow, blue, silver, and gold
  - Four paint brushes: Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with English and metric doubles as pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V

**801083** – Cresting Kit

**801084** – Cresters Only



## DIP KIT

- Includes:
  - 1 glass dip tube
  - 1 arrow hanger
  - 2 pints (946 ml) of white Crest-Lac
  - 2 pints (946 ml) of clear Crest-Lac
  - 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

**801094** – Dip Kit

**801085** – Cresting Kit and Dip Kit Combo

**801095** – Dip Tube

**801098** – Arrow Hanger

**801100** – Dip'n Plug Ring





## 🎯 **PRO TIP:**

### **CROWN DIPPING AND CRESTING**

Bohning offers many options for this purpose, ranging from clearcoats to white to colors, in both solvent-based and water-based finishes. Bohning offers water-based Crest-Lac paint, which is very low odor, easy to thin to your desired consistency using distilled water, and is easy to clean up.

Bohning's Fletch-Lac paint is the original solvent-based arrow paint, it is time tested, covers all arrow surfaces extremely well with minimal coats, and thins well with Bohning Fletch-Lac Thinner.

#### **Crown dipping for both Fletch-Lac and Crest-Lac paint, follow the steps below for the best arrow finish:**

1. Clean arrow shaft.
  - a. For wooden arrows, sand and then wipe with a tack cloth.
  - b. For Carbon or Aluminum arrows, scrub shaft surface with Bohning SSR powder on a scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
2. Pour paint into dip tube making sure to adjust the viscosity (thickness) with the correct thinner for the paint that you are using. Stir paint, allow to sit for 20 minutes, pop any surface bubbles in the paint.
3. Hang arrows using the Bohning Arrow hanger.
4. Plug hollow arrows with Bohning Dip'n Plug ring.
5. Dip arrows to the desired depth in the paint, pull out of paint until paint starts to drip, then dip the arrows back into paint. Allow the paint to stream off the shafts until it is just dripping and then hang to dry over a surface that can collect the excess paint.
6. Allow paint to dry completely before coating with another paint or clearcoat. If coating with another paint, it is recommended that you lightly sand the painted surface of the shaft and then wipe with a tack cloth.
7. Pour leftover paint back into cans to save for the next round of arrows.

#### **Cresting for both Fletch-Lac and Crest-Lac paint.**

1. Clean arrow shaft.
  - a. For wooden arrows, sand and then wipe with a tack cloth.
  - b. For carbon or aluminum arrows, scrub the shaft surface with Bohning SSR powder and a dish scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
  - c. For Dipped/Painted arrow shafts: Wipe dipped/painted end of shaft with a tack cloth.
2. Mix desired paints. Determine your desired cresting pattern.
3. Place arrow onto The Bohning Crester, making sure to put the nock end tight against the arrow stop.
4. Proceed with cresting the arrow. Leave the crester spinning with the arrow in place until the paint is dry.
5. If a clearcoat top coat is desired for the arrow, using Crest-Lac clear is strongly recommended as it will not dissolve the cresting lines.

*For unfinished wooden arrows, a finish is essential for the entire arrow shaft.*





## FLETCH-LAC

- Industry standard for over 50 years – top choice of custom arrow shops worldwide!
- Solvent-based creting paints that dry to a hard, chip-resistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

**1412** – 1 oz Jar (17.2 ml)

**1105** – Pint (473.1 ml)

**1106** – Quart (946.4 ml)

**1107** – Gallon (3.79 l)



## CREST-LAC

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

**301011** – 1 oz Jar (17.2 ml)

**301014** – Pint (473.1 ml)

**301012** – Quart (946.4 ml)

**301013** – Gallon (3.79 l)

### GLOSS COLOR CHOICES



### FLORESCENT COLOR CHOICES



### METALLIC COLOR CHOICES



### MATTE COLOR



### GLOSS COLOR CHOICES



### FLORESCENT COLOR CHOICES



### METALLIC COLOR CHOICES



### CLEAR



### PRO TIP:

If thinning is desired, use distilled water **NOT** paint thinner





### FLETCH-LAC THINNER

- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

**1131** – Pint (473 ml)  
**1132** – Quart (946.4)  
**1133** – Gallon (3.79 l)



### FLETCH-LAC SEALANTS

#### CLEAR AND BLUE CLEAR

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

**1124** – BC/CL Pint (473 ml)  
**1125** – BC/CL Quart (946.4)  
**1126** – BC/CL Gallon (3.79 l)

#### SUPERCOAT

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

**1120** – Supercoat Pint (473 ml)  
**1121** – Supercoat Quart (946.4)  
**1122** – Supercoat Gallon (3.79 l)



### FEATHER-DRI

- Protect your fletchings from the weather
- Colorless, odorless, water-repellent powder
- Includes bag to shake powder onto fletched feathers
- Environmentally safe

**1611**



### FEATHER TOWER®

- See page 16 for more information

**601010**

# SHIRTS



## ZIP-UP PULL-OVER

- Made of high quality, moisture-wicking material
- Sm-3XL

**701049GY/WH** – Gray/White  
**701049GY/RD** – Gray/Red



FRONT



BACK

## 75TH ANNIVERSARY SHIRT

- Fabric Content - 100% polyester, 3 oz
- Moisture management/antimicrobial performance fabric
- Sm-3XL

**701075** – Red/White



FRONT



BACK

## NEON GREEN JERSEY

- Limited Edition "It's in Our Vanes" jersey
- High quality, breathable fabric
- YL-3XL

**701038NG**



FRONT



BACK

## SHOOTER JERSEY

- Made of high quality, moisture-wicking material
- Option to customize
- Sm-3XL

**701039**



## HATS

**NEW****GREEN MESH**

- Mesh back
- Adjustable snap back

**701043GR****NEW****LEATHER PATCH**

- Mesh back
- Adjustable snap back

**701043LTH****DISTRESSED BROWN**

- Bohning's best seller
- Mesh back
- Adjustable snap back

**701043TR****REALTREE®**

- Hook and loop closure

**701004RT**

## FISHBOWL DISPLAY

- 1630BOWL** - Tex-Tite - 24 pk
- 1631BOWL** - Seal-Tite - 24 pk
- 941019BOWL** - Lightning Lube - 16 pk
- 1634BOWL** - Xccelerator - 16 pk



## STOCKED SNAPFIT™ DISPLAY

- Shelf capacity: 5 lbs (2.3 kg) per 4" panel
- Hook capacity: 1 lb (.45 kg) per hook
- Made from engineering-grade, recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for non-marring stability
- Slots in column caps accommodate standard foam board signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays

**CALL A BOHNING REP FOR MORE DETAILS AND ORDERING: 231 - 229 - 4247**



### SNAPFIT™ DISPLAY — 8 X 8

- Includes:
  - Sixteen – 16" columns
  - Twenty-four – 8" plates
  - Includes four stabilizing feet
  - Forty-eight – 3" hooks
  - Four – 8" shelves

**901051**

### SNAPFIT™ DISPLAY — 8 X 16

- Includes:
  - Sixteen – 16" columns
  - Twelve – 16" plates
  - Twelve – 8" plates
  - Includes four stabilizing feet
  - Sixty-four – 3" hooks
  - Eight – 8" shelves

**901052**

### SNAPFIT™ DISPLAY — 16 X 16

- Includes:
  - Sixteen – 16" columns
  - Twenty-four – 16" plates
  - Includes four stabilizing feet
  - One hundred – 3" hooks
  - Eight – 16" shelves

**901053**

### SNAPFIT™ DISPLAY TABLETOP

- Includes:
  - One 16" column
  - Includes one stabilizing foot
  - Ten – 3" hooks

**901050**

ALL DISPLAYS:



**BK**  
Black



## ADHESIVES

- 1304** – Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)  
**13032** – Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)  
**1316** – Alcohol Burner Replacement Wick  
**1134** – Platinum Thinner\* - 1 Pint (473.1 ml)

*\*PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING.  
 ONLY USE PLATINUM THINNER WITH PINT, QUART, OR GALLON SIZES  
 OF PLATINUM THAT HAVE THICKENED WITH TIME.*

## CRESTING AND DIPPING

- 1400** – Hair Line Cresting Brush  
**1401** – 1/8" (3.18 cm) Cresting Brush  
**1402** – 1/4" (6.35 cm) Cresting Brush  
**1403** – 1/2" (12.7 cm) Cresting Brush  
**801095** – Dip Tube  
**801098** – Arrow Hanger  
**801100** – Dip'n Plug Ring

## FLETCHING JIGS

## Blazer® Jigs and The Big Jig

- 1319** – Clamp Release Tape, 3 pieces  
**13192** – Clamp Release Tape Bulk Pack, 21 Pieces  
**8250** – Blazer Straight Clamp  
**8251** – Blazer 3° Right Helical Clamp  
**8361** – Big Jig 3° Right Helical Clamp  
**8362** – Big Jig 1° Right Offset Clamp  
**601004** – Crossbow Receiver / Adapter  
**601009** – 4 Fletch Disk Adapter

## Multi-Fletcher®

- 601056** – Multi-Fletcher Clamp  
**601057** – Insert, 3° Right Helical  
**601058** – Insert, 1° Right offset  
**601059** – Insert, Straight  
**601060** – Insert, 1° Left Offset  
**601061** – Insert, 3° Left Helical  
**601062** – Insert, Feather 2° Right Offset  
**601063** – Insert, Feather 2° Left Offset

## Pro Class Jig

- 1351** – Straight Clamp  
**1352** – Right Clamp  
**1353** – Left Clamp  
**601020** – 1" (25cm) Vane Fletching Clamp - Griffin Vane  
**601004** – Crossbow Receiver / Adapter

## Tower® Jigs

- 601011** – Center Post for .246 (6.25 cm) ID (Standard size)  
**601012** – Center Post for Pin Adapter  
**601013** – Center Post for .167" (5.50 cm) ID (F Nock size)  
**601014** – Center Post for .204" (5.18 cm) ID (A Nock size)  
**601015** – Center Post for Crossbow Bolts  
**601016** – Center Post for Swedged-end Arrows  
**601030** – Center Post for .231" (5.87 cm) ID (H.E. Nock size)  
**1200** – Arms, 1° Right Offset (red), set of 3  
**1201** – Arms, Straight (gray), set of 3  
**1202** – Arms, 3° Helical (black), set of 3  
**601007** – Arms, Impulse Straight (yellow), set of 3  
**601024** – Arms, Mylar Straight (gray w/ red clip), set of 3  
**601037** – Arms, 1° Left Offset (orange), set of 3  
**601038** – Arms, 3° Left Helical (purple), set of 3  
**601008L** – Arms, Feather Left Wing (green), set of 3  
**601008R** – Arms, Feather Right Wing (blue), set of 3  
**80211** – Tower Spacers, set of 3  
**601017** – Pressure Ring, Small (red)  
**601018** – Pressure Ring, Large (lime)  
**601036** – Pressure Ring, X-Large (orange)  
**1319** – Clamp Release Tape, 3 pieces  
**13192** – Clamp Release Tape, Bulk Pack (21 Pieces)

## QUIVERS

## Bruin Quiver

- 201031** – Retainer Set  
**201032** – Tree Hanging Loop  
**1073** – Lever Lock

## Lynx® Quiver

- 1045** – Retainer Set for small  
 .166" (4.22 cm) and  
 .204" (5.18 cm) arrows  
**10382** – Retainer Set for  
 standard-size arrows

## Pocket Quiver

- 201036** – Body  
**201037** – Clip  
**201038** – Retainer Cap

## SERVER






- 801024BW** – Mini-Server Replacement Spool with thread, 2 pk

## STRIPPER TOOLS

- 15240** – The Stripper Blades, 3 pk  
**801026** – The Strip-Pro Blades, 3 pk

## SHOOTER STOOL

- 701057** – Arrow tubes with clips

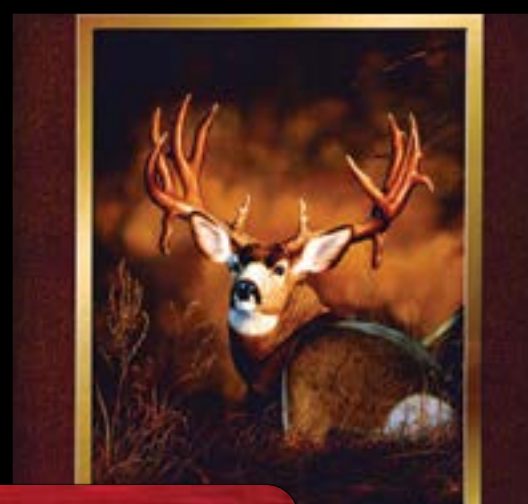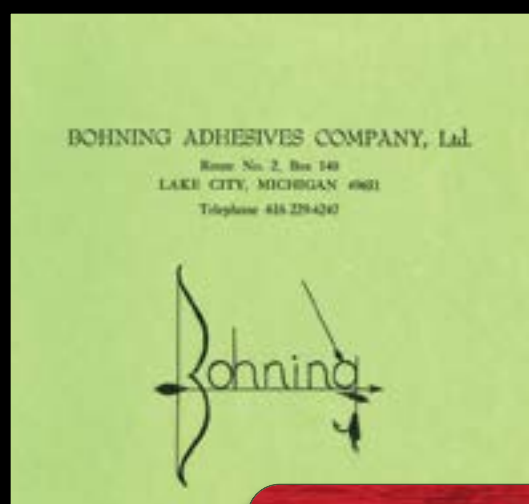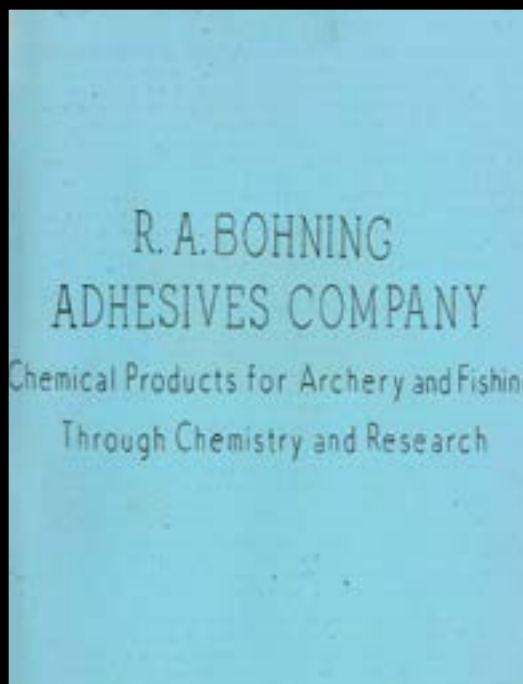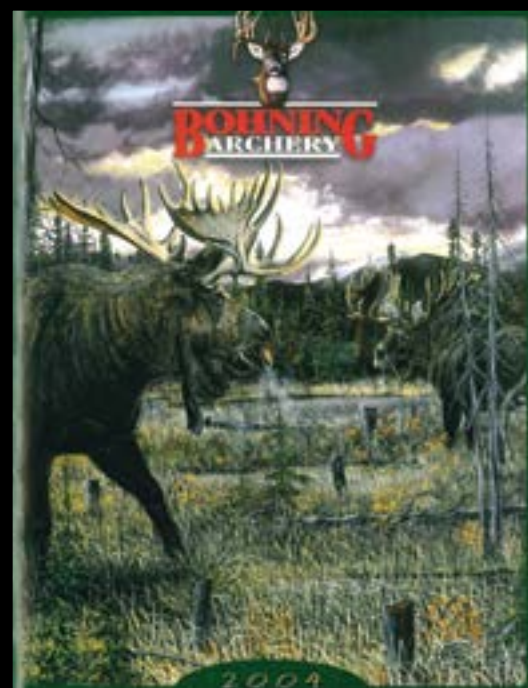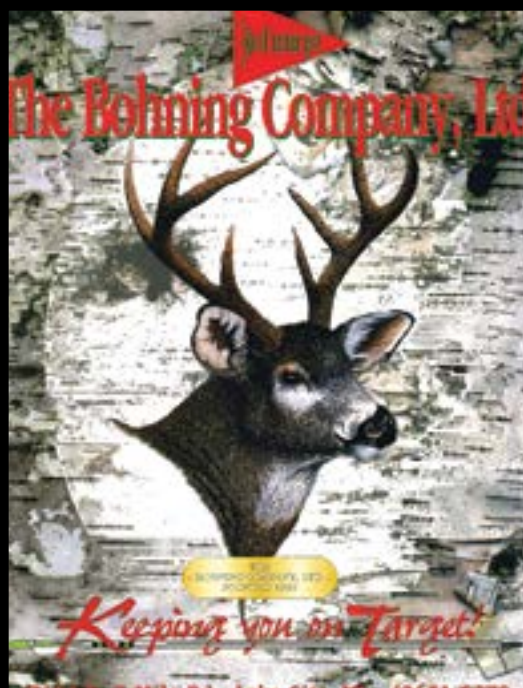

**BOHNING COMPANY, LTD.**  
7361 N. 7 Mile Rd, Lake City, MI 49651 • USA • 231.229.4247

