



SERVING ARCHERS AND HUNTERS FOR 77 YEARS



The Frontier Jig is the newest Bohning fletching jig. It makes use of Bohning's award winning clamp-style inserts. It folds flat for portability and storage. Easy to use with accurate, repeatable results. Perfect fletching jig at home for your bench, at your camp or club, or in your pack for a week long hunt.





TO ORDER:

WEBSITE: www.bohning.com

PHONE: 231-229-4247

TOLL FREE: 800-253-0136 EMAIL: info@bohning.com

ADDRESS: Bohning

7361 N. 7 Mile Rd. Lake City, MI 49651

USA



CONTENTS:

FLETCHING JIGS	4
PREMIUM POINTS	7
PREMIUM POINTS	10
WAXES	12
PREMIUM POINTS WAXES ADHESIVES	13
ARROW WRAPS	10
CUSTOM VANES & WRAPS	20
VANESCROSSBOW PRODUCTS	21
CROSSBOW PRODUCTS	31
QUIVERSBOW CASES	34
BOW CASES	36
ACCESSORIES	37
STRING ACCESSORIES	40
SERVING	43
TOOLS	44
TRADITIONAL	45
DISPLAYS	50
APPAREL	52
REPLACEMENT PARTS	

OTHER DIVISIONS OF BOHNING:














Website QF Code

www.bohningcreative.com





Bohning Precision Products can get your machining or tooling projects off the ground and in your hands quickly and efficiently. 50+years of experience in machining and molding. We will get your project done. Don't send your tooling needs out of the country.

Website Q Code

www.bohningprecisionproducts.com

BDHNINGGOLF PRODUCTS



Bohning Golf Products takes pride in producing a wide variety of Ferrules for both Irons and Metalwoods. Golf Ferrules not only provide a decorative element to a golf club, they also provide a smooth transition from the shaft to the hosel, covering any rough edges.

Code

www.bohninggolf.com





innovative products for the agricultural industry. The Bohning Block is a revolutionary hoof block. Durable, with no heating necessary to install, this block stays put, reducing the need for reapplication.

Bohning AG develops, engineers, and produces

Website QR Code

www.bohningag.com



GLUE IN



DO YOUR POINTS DO THIS? BOHNING PREMIUM POINTS:

INDUSTRY-LEADING TOLERANCES
Guaranteed ± 0.25 grains of specified weight

SUPERIOR CONCENTRICITY FOR A TRUE SPIN Guaranteed concentric within 0.001" (0.0025cm)



DETAILS ON PAGE 10

USA

BLACK SKY CROSSBOW BOLTS

3" SHIELD CUT

Low Profile Vane Stiffer/ Quieter Material Ideal for High Speed Railed Crossbows

Bohning Crossbow Nock

Bohning Vanes

20" Carbon Fiber Bolt 400 Grain Total Weight ∘ +/-.003 Straightness

READY TO PERFORM.

BLACK SKY3.0 BLACK SKY2.0

2" LEADING EDGE

Blazer Vane Profile


Stiffer/ Quieter Material Ideal for High Speed

Rail-less Crossbows

DETAILS ON PAGE 3

100 Grain Bohning **Premium Points**

FLETCHING JIGS

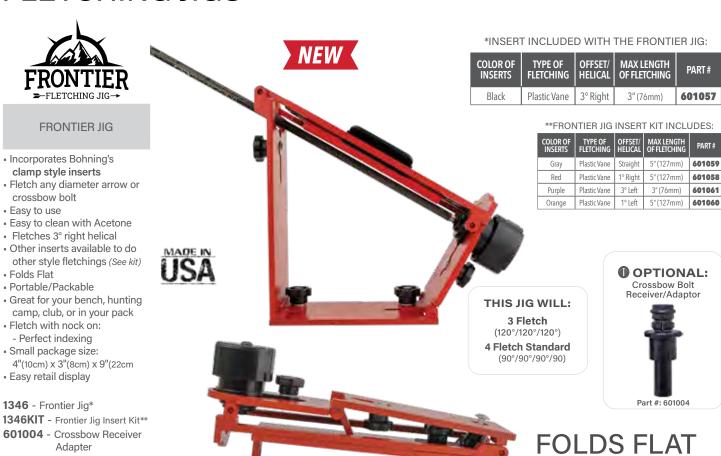



Adapter

3 VANE ADVANCED FLETCHING SYSTEM

CAULDRON®

- Fletches 3 vanes at once using Bohning's clamp style inserts
- Easy to switch inserts for different fletching configurations. No tools needed.
 - Straight
 - 1° Left offset
 - 1° Right offset
 - 3° Left helical
 - 3° Right helical
- Micro Arrow Diameter
- Standard Arrow Diameter
- Large Arrow Diameter
- · Fletch with nock on:
 - Perfect indexing

601025 - Cauldron * 601025HELIX - Cauldron Helix** 601026 — Adjustable Compression Ring



THIS JIG WILL:

3 Fletch (120°/120°/120°)

FOR STORAGE AND PORTABILITY

MAX LENGTH OF FLETCHING

5" (127mm)

3" (76mm)

5" (127mm)

3" (76mm)

5" (127mm)

PART#

601059

601057

601058

601061

601060

FLETCHING JIGS

MULTI-FLETCHER®

- Incorporates Bohning's clamp style inserts
- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Easy clean up clamp inserts and clamp plates can be cleaned with acetone to remove glue
- Snap-lock, easy-change clamp inserts provide superior adhesion force and ensure consistent angles

601055 - Multi-Fletcher[®] **601056** - Clamp Plate









INSERTS INCLUDED WITH THE MULTI-FLETCHER:

COLOR OF INSERTS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	PART#
Gray	Plastic Vane	Straight	5" (127mm)	601059
Black	Plastic Vane	3° Right	3" (76mm)	601057
Red	Plastic Vane	1° Right	5" (127mm)	601058
Purple	Plastic Vane	3° Left	3" (76mm)	601061
Orange	Plastic Vane	1° Left	5" (127mm)	601060
Blue	Feather	2° Right	5" (127mm)	601062
Green	Feather	2° Left	5" (127mm)	601063

THIS JIG WILL:

3 Fletch (120°/120°/120°)

4 Fletch Standard (90°/90°/90°/90) 4 Fletch X-Wing

(60°/120°/60°/120°)



PRO CLASS JIG

- Capable of 3 or 4 fletch (4 at 90° apart)
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm) long

1348 — Straight

1349 - Right Wing

1350 — Left Wing

601004 - Crossbow Receiver/Adapter





THIS JIG WILL:

3 Fletch (120°/120°/120°)

4 Fletch Standard (90°/90°/90°/90)

PRO CLASS CLAMPS

1351 — Straight

1352 — Right Wing

1353 — Left Wing

601020 — 1" (25mm) Vane

Fletching Clamp - Griffin Vane **601021** — 2" (50mm) Vane

Fletching Clamp - Griffin Vane



OPROTIP:

HELICALS AND OFFSETS ARE THE SAME THING!

Manufacturers use different ways of classifying helicals and offsets, which can be confusing when making comparisons. First of all, let's clarify that helicals and offsets are essentially the same thing. A helical is defined as any vane angle that is not a 0° straight fletch. An offset is, quite simply, a minor helical and usually refers to anything between 0° and 2°. A vane that is fletched at greater than 2° appears more twisted due to the way it wraps around the shaft, however, a vane fletched at less than 2° still has a helical "twist", it is just less noticeable.

FLETCHING JIGS

TOWER° JIGS

Tower jigs fletch 3 vanes at once and apply more pressure than standard jigs. One base with interchangeable arm options for feathers, plastic vanes, or mylar vanes.

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fletch all 3 vanes at once with precise 120° spacing
- Applies even pressure along the entire vane base
- Great for single or multiple vane repairs too!

601027 - COMPLETE TOWER®

- Great for clubs and families
- All the Tower Jig components in one purchase

12963 - TRIPLE TOWER°

- Arms: Straight, 3° Right, 1° Right
- · Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin Nock

12962 - HELIX TOWER°

- Arms: Straight, 3° Left
- Center Posts: F Nock, A nock, HE, Standard, Crossbow, Pin

- Arms: 2° Right, 2° Left
- · Center Posts: F Nock, Standard, Swedged

601001 - CROSSBOW TOWER®

- Arms: Straight, 1° Right
- Center Posts: Crossbow

601010 - FEATHER TOWER 601035 - MYLAR TOWER

- · Arms: Mylar Vane Straight
- · Center Posts: F Nock, Standard, Pin Nock

COLOR OF ARMS	TYPE OF FLETCHING	OFFSET/ HELICAL	MAX LENGTH OF FLETCHING	REPLACEMENT PART#
Gray (solid)	Plastic Vane	Straight	4" (101mm)	1201
Black	Plastic Vane	3° Right	3" (76mm)	1202
Red	Plastic Vane	1° Right	4" (102mm)	1200
Purple	Plastic Vane	3° Left	3" (76mm)	601038
Orange	Plastic Vane	1° Left	4" (102mm)	601037
Gray w/ Red Clip	Mylar Vane	Straight	3.75" (95mm)	601024
Blue	Feather	2° Right	5" (127mm)	601008R
Green	Feather	2° Left	5" (127mm)	601008L

See page 53 for other Tower® Jig replacement parts

THIS JIG WILL: 3 Fletch (120°/120°/120°)

SOME MODELS:

CROSSBOW COMPATIBLE

See descriptions

BLAZER® HELIX JIG

- 3° right helical on vanes up to 2.5" (64mm) long
- Fits standard shafts 0.293 -0.306" (7.4 - 7.8mm) OD

1344 — Blazer Helix Jig



THIS JIG WILL: 3 Fletch

(120°/120°/120°) 4 Fletch Standard (90°/90°/90°/90)



NOCKS



Throat Size .120" (3.05 mm) 6.5 grains (421 mg)



.120" (3.05 mm) 7.0 grains (454 mg)

A NOCK°



Throat Size .120" (3.05 mm) 8.0 grains (518 mg)

H.E. NOCK

Fits .231" shafts



TL

Teal

BK

NG

Neon

Green

RU

CL

KW

Kiwi

WH

White

NY

Neon

Yellow

EB

Blue

SOLID COLOR CHOICES

RD

SB

Satin

Blue

Electric

TG

Tangerine

ALL NOCKS ON THIS PAGE **AVAILABLE IN THESE COLORS:** TRANSLUCENT COLOR CHOICES



PU

NO

Neon Orange

Purple

Apricot



LM

RS Rose

Pink

F NOCK°



Double-lock throat

10141 — 12 pk **10142** — 100 pk **10143** — 1000 pk



Throat Size .109" (2.77 mm) 12.0 grains (778 mg)

SIGNATURE[®]

NOCK

Fits .204" shafts

- Double-lock throat
- Raised index

10151 — 12 pk **10152** — 100 pk





Throat Size .120" (3.05 mm) 7.0 grains (583 mg)

- Double-lock throat Recessed index
- **401023** 12 pk 401024 - 100 pk **401025** - 1000 pk



Throat Size .120" (3.05 mm) 9.0 grains (583 mg)

0 PRO TIP

PRESS FIT NOCK INSTALLATION: Using bowstring wax can be helpful for tight fitting nocks. Simply apply wax to the nock shank, insert while rotating until the nock is in the appropriate position.

NEVER push the nock ears against a hard surface, use pliers to twist into place, or bite the nock.



SMOOTH RELEASE **INSERT NOCK**

Fits **.246"** shafts (standard carbon siz



- Smooth throat
- Raised index

1006 — 12 pk 1008 - 100 pk 1009 - 1000 pk

- Single lock throat for ultimate accuracy
- Raised index

401033 - 12 pk 401034 - 100 pk **401035** - 1000 pk

BLAZER° NOCK



- Double-lock throat
- Raised index

1003 — 12 pk 1004 - 100 pk **1005** — 1000 pk

NOCKS



Small Throat Size .106" (2.69 mm) 5.0 grains (324 mg)



Standard Throat Size .120" (3.05 mm) 5.0 grains (324 mg)

U C

Throat Size .120" (3.05 mm) 5.0 grains (324 mg)

BLAZER® PIN NOCK

Small Throat

- Marked with the letter "R"
- Raised index

10161 — 12 pk **10162** — 100 pk **10163** — 1000 pk

Standard Throat

- Marked with the letter "V"
- Raised index

10071 — 12 pk **10072** — 100 pk **10073** — 1000 pk

SMOOTH RELEASE PIN NOCK

- Marked with letter "M"
- Redesigned to fit broader range of pin sizes
- Smooth throat and short ears
- Raised index

401030 — 12 pk **401031** — 100 pk **401032** — 1000 pk



PIN NOCKS INSTALLATION:

DO NOT use excessive force to install the pin nock onto the adapter as this could cause cracks in the nock and lead to nock failure.




All Bohning Pin nocks now accommodate a broader range of pin adapter brands!




ALL NOCKS ON THIS PAGE AVAILABLE IN THESE COLORS:

TRANSLUCENT COLOR CHOICES



SOLID COLOR CHOICES



PRO TIP: INSPECTING YOUR NOCK

The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This could harm you and damage your equipment. When in doubt, replace the nock.

NOCKS



Throat size .115" (2.92 mm) Weight dependent on size - see below

CLASSIC NOCK

- Glue-on nock for swedged end aluminum, wood and fiberglass shafts
- Index and alignment feature

AVAILABLE SIZES:

- 5/16" (7.94 mm) Avg. Weight: 10.0 grains (648 mg)
- 11/32" (8.73 mm) Avg. Weight:13.0 grains (842 mg)

10131 — 12 pk **10132** — 100 pk 10133 - 1000 pk









ΥE NB Yellow Navy Blue

BR Purple Brown

Weight dependent on size - see below

T NOCK

 Glue-on nock for swedged end aluminum, wood & fiberglass shafts

AVAILABLE SIZES:

- 1/4" T Nock (6.35mm)
- Throat size: 0.105" (2.67 mm) Average Weight: 6.0 grains (388 mg)
- 9/32" T Nock (7.14 mm)
- Throat size: 0.115" (2.92 mm) Average Weight: 8.0 grains (519 mg)
- 5/16" T Nock (7.94 mm)
 - Throat size: 0.115" (2.92 mm) Average Weight: 14.0 grains (907 mg)
- 11/32" T Nock (8.73 mm)
 - Throat size: 0.105" (2.67 mm) Average Weight: 15.0 grains (972 mg)

1054T - 12 pk **1055T** - 100 pk **1056T** — 1000 pk



SOLID COLOR CHOICES



YE

TRANSLUCENT COLOR CHOICES





SOLID COLOR CHOICES









CLASSIC, T NOCK AND LEGEND NOCK: To install, simply apply 3-4 drops of Fletch-Tite Platinum, Blazer Bond, or Fletch-Fuse to the tapered end of the shaft. Use light pressure, twist the swedged nock on to the tapered end one full rotation until fully seated.



11.0 grains (713 mg)

CROSSBOW NOCK

.300" Half Moon Nock (7.70 mm)

401008 — 12 pk **401009** - 100 pk **401010** - 1000 pk









Throat size .105" (2.67 mm)

LEGEND NOCK

• Glue-on nock for swedged end aluminum, wood and fiberglass shafts

AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm) Average Weight 8.0 grains (519 mg)
- 5/16" Legend Nock (7.94 mm) Average Weight: 11.0 grains (713 mg)

1057 — 12 pk **1058** — 100 pk

1059 - 1000 pk





LM

PREMIUM POINTS

SCREW-IN

AVAILABLE IN 6, 12, 120, AND 1,200 PACKS (SPECIFY PACK SIZE WHEN ORDERING)

BULLET POINTS AND CONCAVE POINTS





^{*} Points 150+ grains will have concentricity of 0.002" or better

CONVERSION CHART				
17/64"	0.266"	6.75 mm		
9/32"	0.281"	7.14 mm		
19/64"	0.296"	7.54 mm		
5/16"	0.313"	7.95 mm		
21/64"	0.328"	8.33 mm		
11/32"	0.344"	8.74 mm		



PREMIUM POINTS



GLUE-IN

AVAILABLE IN 12 PACKS





SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART#
P\$23	100 gn (6.5 g)		851036
	150 gn (9.7 g)	Black Eagle®	851037
	180 gn (11.7 g)		851038
	100 gn (6.5 g)		8510100
PS26	120 gn (7.8g)	Dlask Faula®	8510101
P320	150 gn (9.7 g)	Black Eagle®	8510102
	180 gn (11.7 g)		8510103
PS27	120 gn (7.8 g)		851039
	180 gn (11.7 g)	Diad. Faula®	851040
	210 gn (13.6 g)	Black Eagle®	851041
	250 gn (16.2 g)		851042
	100 gn (6.5 g)		851030
Tank 23D/	120 gn (7.8g)	Carbon	851031
X Buster (350 - 500 Spine)	150 gn (9.7 g)	Express®	851032
	180 gn (11.7 g)		851075
	120 gn (7.8 g)		851063
X Buster (600 - 700 Spine)	150 gn (9.7 g)	Carbon Express®	851064
	180 gn (11.7 g)		851065
	100 gn (6.5 g)		851047
LineJammerPro	120 gn (7.8 g)	Carbon Express®	851048
	150 gn (9.7 g)		851049

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART#
2312	150 gn (9.7 g)	Easton®	851001
2312	200 gn (13.0 g)	EdStOII	851002
2314	150 gn (9.7 g)	Easton®	851003
2314	200 gn (13 g)	Ed2(OII	851004
2315	150 gn (9.7 g)	Easton®	851005
2313	200 gn (13.0 g)	Ed2(OII	851006
2210	150 gn (9.7 g)	Easton®	851028
2318	200 gn (13.0 g)	Ed2(01)	851029
2712	200 gn (13.0 g)	Easton®	851007
	300 gn (19.4 g)	Ed2(OII	851008
	100 gn (6.5 mg)		851094
FatBoy	150 gn (9.7 mg)	Easton®	851095
	180 gn (11.7mg)		851096
	100 gn (6.5 g)		851033
SuperDrive 23	120 gn (7.8 g)	Easton®	851034
	150 gn (9.7 g)		851035
	100 gn (6.5g)		851050
SuperDrive 25	150 gn (9.7 g)	Easton®	851051
	180 gn (11.7 g)		851052
SuperDrive 27	150 gn (9.7 g)	Easton®	851066
SuperDrive 27	180 gn (11.7 g)	EdS[OII	851067

SIZE	WEIGHT GRAIN (GRAM)	ARROW MANUFACTURE	PART#
	100 gn (6.5 g)		8510104
CTOO	120 gn (7.8g)	C-14T:®	851097
GT22	150 gn (9.7 g)	Gold Tip®	851098
	180 gn (11.7 g)		851099
V.C. II.	100 gn (6.5 g)	C LIT: 0	851056
X-Cutter	120 gn (7.8 g)	Gold Tip®	851057
	100 gn (6.5 g)		851053
9.3 Max	120 gn (7.8 g)	Gold Tip®	851054
	150 gn (9.7 g)		851055
	120 gn (7.8 g)		851072
Triple X	180 gn (11.7 g)	Gold Tip®	851073
	210 gn (13.6 g)		851074
	100 gn (6.5 g)		851060
NVX/V-TAC 23	150 gn (9.7 g)	Victory®	851061
	180 gn (11.7 g)		851062
NWV/WTAC 25	100 gn (6.5 g)	Viete n @	851056
NVX/V-TAC 25	120 gn (7.8 g)	Victory®	851057
NIV OF IN	100 gn (6.5 g)	Vi atau d	851058
NVX 25 HV	120 gn (7.8 g)	Victory®	851059
	120 gn (7.8 g)		851043
NDV/NTAC 07	180 gn (11.7 g)	10.	851044
NVX/V-TAC 27	210 gn (13.6 g)	Victory®	851045
	250 gn (16.2 g)		851046

BREAK-OFF

SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	PART#
0.166"/4.22 mm Type I	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts up to 0.218" (5.54mm)	851025
0.166"/4.22 mm Type II	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.219"- 0.228" (5.56 - 5.79mm)	851026
0.166"/4.22 mm Type III	100-110-120 gn (6.5 - 7.2 - 7.8 g)	For shafts 0.229" (5.82mm) and up	851027

O PRO TIP:

To install glue in points use Ferr-L-Tite for aluminum arrows and Ferr-L-Tite Cool Flex for carbon arrows or carbon hybrid arrows.

WAXES



SEAL-TITE®

- Silicone-based bowstring wax
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Vegan

1360 — 0.92 oz tube (28 grams) **1360Box** — 1 box 1.41 oz (40 grams)

BULK OPTIONS:

 — 24 tubes **1631BOWL** - Bowl and 24pk — 250 tubes — 500 tubes

1631Box — 24 boxes **35001Box** — 250 boxes **3500Box** — 500 boxes



TEX-TITE°

- Natural-based bowstring wax
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

1306 — 0.92 oz tube (28 grams)

1306Box — 1 box 1.41 oz (40 grams)

BULK OPTIONS:

 — 24 tubes **1630BOWL** - Bowl and 24pk — 250 tubes — 500 tubes

1630Box — 24 boxes **32001Box** — 250 boxes **3200Box** — 500 boxes



XCCELERATOR WAX®

- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction on slides, wheels and rollers
- Vegan

1365 — 0.51 oz tube (14.5 grams)

BULK OPTIONS: 1634 — 16 tubes 1634BOWL - Bowl and 16 pk 1365-250 - 250 tubes



STRING SHIELD®

- Silicone-based liquid wax
- Sponge-top applicator
- Odorless and waterproof
- Vegan

301019 — 1.18 oz tube (35 ml)

BULK OPTIONS: 301019-16 - 16 tubes **301019-250**-250 tubes

PRO TIP:

STRING SHIELD'S[™] liquid formula penetrates fibers of individual strands on string.

\bigcirc **PRO TIP**: AL-TITE and T

SEAL-TITE® and TEX-TITE® are available in convenient and simple to use drop side boxes for the easiest bow string wax application on the market.

No more wax melting out of a tube and all over your bow case and expensive equipment.

PRO TIP:

OTHER USES FOR SEAL-TITE® and TEX-TITE®

- Apply to nock shank on press-fit nocks for easier insertion and indexing.
- Apply to pin bushings for easier installation and indexing of tightfitting pin nocks.
- Apply to point and broadhead threads to keep them from loosening and to help prevent rust.

FISHBOWL DISPLAY - GREAT POINT-OF-PURCHASE ITEMS



1630BOWL Tex-Tite - 24 pk



1631BOWL Seal-Tite - 24 pk



941019BOWL Lightning Lube - 16 pk



1634BOWL Xccelerator Wax - 16 pk



301023BOWL Arrow Lube - 16 pk



301025BOWL Fletch Fuse - 24 pk

SEE ALL FISHBOWL DISPLAY INFORMATION ON PAGE 50

	BOWSTRING WAX APPLICATION:				
SEAL-TITE	TEX-TITE	XCCELERATOR WAX	STRING SHIELD	GRIT GUARD	
STEP 1 (ALL	STEP 1 (ALL WAXES): Start with a clean string: using a rag dipped in warm water, or by wrapping a serving thread around the string and moving it up and down, remove dirt and old wax.				
SEAL-TITE	SEAL-TITE TEX-TITE XCCELERATOR WAX STRING SHIELD GRIT GUARD - SEAL-TITE BOX - TEX-TITE BOX				
STEP 2: Warm the tube of wax by rolling it between your hands. Remove the lid and push or twist the bottom to move the wax up in the tube. Apply wax liberally to bowstrings. Rub wax into the string fibers briskly using your fingers or a leather strip - as wax warms, it melts into the string fibers.			Step 2: Apply thin coat to bowstring using the foam applicator	Step 2: Lower the sides of the applicator box and apply wax liberally to bowstrings. Rub wax into string fibers using your fingers or leather strip - as the wax warms, it melts into the string fibers	

ADHESIVES



FLETCH-TITE PLATINUM

- Solvent-based glue designed for vanes, feathers and swedged nocks
- Works on carbon, aluminum, wood, fiberglass, wraps and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 53
- Industry standard for over 70 years

1301 — 3/4 oz Tube (22.1ml)

BULK OPTIONS:

301040 — 40 pk

301030 — 200 pk

301006EQ— 6 pk*

 $301040EQ - 40 pk^*$

301030EQ - 200 pk*

All come in clamshell package

1356 — Pint (473.1 ml)

1357 — Quart (946.4 ml)

1358 — Gallon (3.79 I)

*Packed to meet "Excepted Quantities" International ocean and air transportation requirements in order to reduce dangerous goods fees.

▲ WARNING: Cancer and Reproductive Harm www.P65Warnings.ca.gov



FLETCH FUSE™

- Instant glue designed for vanes, points, inserts and swedged nocks
- Works on all shaft types
- Clamp time 30 seconds, cure time 2 hours
- Budget-friendly

301025 — 1/2 oz Bottle (17.2 ml)

BULK OPTIONS 301025-24 - 24 Bottles **301025BOWL** - Bowl and 24 pk



BLAZER BOND

- Instant glue designed for swedged nocks
- Works on all shaft types
- cure time 2 hours
- Use a very thin bead or several dots spread out for best adhesion
- Works well in humid

301015 — 1/2 oz Bottle

(29.6 ml)



- vanes, points, inserts and
- Clamp time 20 seconds,
- conditions

(17.2 ml)

301016 — 1 oz Bottle



DISPENSER BOTTLES

- Designed for points and inserts
- Works on all shaft types

INSERT IRON™

 48 hour cure time (72 hours if air is dry)

1317 — 1 oz Bottle (29.6 ml)



 Deluxe bottle has a smaller opening for easier/ cleaner application

1303 — Regular

1304 — 6 pk regular (red) replacement nozzles and caps

13031 — Deluxe **13032** — 6 pk deluxe (white)

replacement nozzles and caps

CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCH-TITE PLATINUM	Vanes Feathers Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	5 Minutes	Minimum: 24 hours 48 hours is best

USEFUL INFORMATION:

- Flexible (non-brittle) bond absorbs shock when shooting into a target repeatedly
- . Does not crack or become brittle
- Along with other applications, use this glue on tip and tail of vanes or feathers for added security.
- Easy jig clean-up simply scrape glue off. Do not use knife or any sharp instruments
- Best in low humidity applications.
 Two year expiration on unopened tubes.
- . Do NOT store solvent-based adhesives in the refrigerator.

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
BLAZER® BOND**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	20 Seconds	2 Hours

USEFUL INFORMATION:

- Fastest curing time.
- Instant, rigid-bonding glue.
 Medium viscosity (Bohning's most liquid CA glue).
- Begins curing on contact.
- · Best for high humidity application.
- One year expiration on unopened tubes.
- ** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

NAME	APPLICATIONS	SHAFT TYPE	CLAMP TIME	CURETIME (before using arrow)
FLETCH FUSE**	Vanes Points Inserts Outserts Swedged nocks	Carbon Cedar Aluminum Fiberglass Wraps Painted	30 Seconds	2 Hours

USEFUL INFORMATION

- Instant, rigid-bonding glue
- . Medium viscosity (thicker than Blazer Bond)
- Begins curing on contact
- Best for high humidity application
- . One year expiration on unopened tubes
- ** All Cyanoacrylate (CA) glues may leave white marks on the shaft. Carefully use acetone to wipe this off, use discretion around wraps and inks

			CLAMP TIME	(before using arrow)
INSERT IRON In	Points Inserts Outserts	Carbon Cedar Aluminum Fiberglass	n/a	48 Hours (72 Hours if air is dry)

USEFUL INFORMATION:

- Strongest glue.
- Insert Iron expands when curing. Hold point or insert in place while curing
- · Cures with moisture best when applied in humid conditions
- One year expiration on unopened bottles . DO NOT store in the refrigerator

ADHESIVES

HOT MELT ADHESIVES



FERR-L-TITE° FOR USE WITH ALUMINUM ARROW

- Designed for points and inserts
- Recommended for wood and aluminum shafts
- · Not for carbon shafts
- Heat-reversible on aluminum shafts—high temperature required
- Melting point of 350° F (176.7° C)
- Industry standard for 75 years

1309 — 12 Gram Stick

BULK OPTIONS:

1339 — 1 lb. Brick (453.6 g) **1633** — 16 Sticks (Bulk) **31001** — 250 Sticks (Bulk)



COOL FLEX° FOR USE WITH CARBON ARROW

- Designed for points, inserts and bushings
- Recommended for carbon, aluminum and fiberglass shafts
- Fully cured when it reaches room temperature
- Use hot water for adjustment, replacement or removal
- Melting point of 280° F (137.8° C)

1308 — 12 Gram Stick

BULK OPTIONS:

1368 — 1 lb. Brick (453.6 g) **13081** — 16 Sticks (Bulk) **13082** — 250 Sticks (Bulk)



ALCOHOL BURNER

- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

1315 — Burner 1316 — Replacement wick

CHOOSE YOUR ADHESIVE

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
FERR-L-TITE	Points Inserts Outserts	Cedar Aluminum	n/a	As soon as it has reached room temperature (approx. 5 minutes)

USEFUL INFORMATION:

- · Hot melt adhesive.
- Heat reversible on aluminum shafts flame required
- No expiration.

NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
COOL FLEX	Points Inserts Outserts Pin Bushings	Carbon Aluminum Fiberglass	N/A	As soon as it has reached room temperature (approx. 5 minutes)

USEFUL INFORMATION:

- Hot melt adhesive (low melt)
- No expiration.



PREMIUM FLETCHING TAPE

- Designed for feathers and mylar vanes
- Works on all shaft types
- Length 60' (18.3m), width 0.188" (4.8mm)
- Machine-cut without lubricant so no dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers



FLETCHING TAPE DISPENSER

- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris
- Refillable; includes 1 roll of premium fletching tape
- Screw holes for easy mounting

801099 - Tape Dispenser


NAME	APPLICATIONS	SHAFTTYPE	CLAMP TIME	CURE TIME (before using arrow)
FLETCHING TAPE	Feathers Mylar Vanes	All	N/A	Immediate

USEFUL INFORMATION

- Pressure sensitive adhesive
- No expiration

1649 - 60' Fletching Tape

ADHESIVES

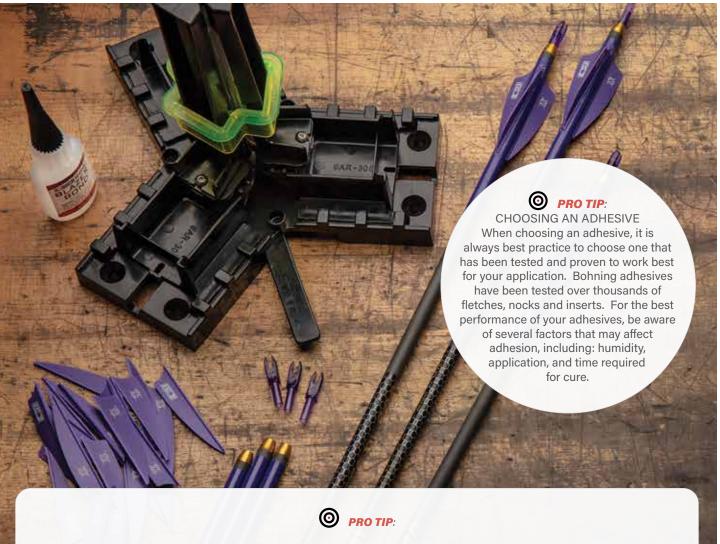

BASIC FLETCHING INSTRUCTIONS:

- 1. Make sure that jig is correctly set up so that the clamp/arm seats firmly to the shaft for the entire length of the vane. Test this by dry fitting shaft and vane in jig without glue.
- 2. Place vane at the desired height in the clamp/arm to get desired distance from the nock.
- 3. For Fletch-Tite Platinum apply adhesive over the entire vane base. For Blazer Bond and Fletch-Fuse apply several dots of adhesive along the vane base and then use the tip of the bottle to spread the adhesive along the length of the base.
- 4. Clamp the vane in the jig for 5 minutes for Fletch-Tite Platinum, 20 seconds for Blazer Bond and 30 seconds for Fletch-Fuse.
- 5. Carefully remove arrow from the jig, and allow Fletch-Tite Platinum to cure for 24-48 hours, Blazer Bond and Fletch-Fuse for 2 hours before use.

ADHESION TROUBLE-SHOOTING

The best prevention for adhesion problems is to properly clean your arrows using Bohning SSR Powder. **DO NOT clean Bohning Vanes.

Follow the correct clamp and cure time for the adhesive that you are using.

Make sure your fletching area and hands are free from spray lubricants, dust, pet hair, greasy food, chemicals or aerosol sprays. Use the correct amount of adhesive based on the adhesive type.

Clean your jig frequently. For Bohning jigs, a short soak of the arm/clamp/insert in acetone will remove excessive adhesive. **Never use a knife to scrape off excess glue! This will cause damage to the jig.**

IDENTIFYING FLETCHING ADHESION PROBLEMS


If fletching fails with adhesive remaining on the shaft but not on the fletch, this indicates an incompatibility between the adhesive and the fletch. Ensure the adhesive you have chosen is the correct choice for your fletch.

If the fletching fails with adhesive remaining on the vanes but not the shaft, this would indicate a problem with the arrow shaft. Start by cleaning the arrow shaft using the Bohning SSR Powder, making sure to rough up the shaft surface and then rinse with hot water and allow to dry.

If the fletching fails with the adhesive remaining on both the vane and the shaft, this could indicate a setup problem with the jig, a damaged clamp, inadequate adhesive curing or a possible contamination on the shaft or vanes.

WRAP SIZING AND INFO:

ARROW WRAP FIT GUIDE

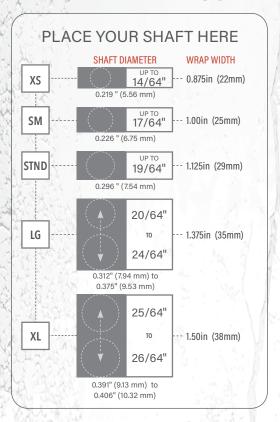

WEIGHT CODE

WEIGHT OF SINGLE WRAP
IN GRAINS

	0	2 3	4						
4" WRAP									
xs	4.2gn	5.4 gn	8.4 gn						
	(272mg)	(350 mg)	(544 mg)						
SM	4.8 gn	6.2 gn	9.5 gn						
	(311 mg)	(402 mg)	(616 mg)						
STND	6.0 gn	7.7 gn	11.9 gn						
	(389 mg)	(499 mg)	(771 mg)						
LG	6.5 gn	8.4 gn	13.0 gn						
	(421 mg)	(544 mg)	(842 mg)						
XL	7.2 gn	9.2 gn	14.3 gn						
	(467 mg)	(596 mg)	(927 mg)						
5.5" WRAP									
xs	5.8 gn	7.4 gn	11.5 gn						
	(376 mg)	(480 mg)	(745 mg)						
SM	6.6 gn	8.5 gn	13.1 gn						
	(428 mg)	(551 mg)	(849 mg)						
STND	8.3 gn	10.6 gn	16.4 gn						
	(538 mg)	(687 mg)	(1063 mg)						
LG	9.0 gn	11.5 gn	17.8 gn						
	(583 mg)	(745 mg)	(1153 mg)						
XL 9.9 gn		12.7 gn	19.7 gn						
(542 mg)		(823 mg)	(1277 mg)						
	7" \	NRAP							
XS	7.4 gn	9.4 gn	14.6 gn						
	(480 mg)	(609 mg)	(946 mg)						
SM	8.4 gn	10.8 gn	16.7 gn						
	(544 mg)	(700 mg)	(1082 mg)						
STND	10.5 gn	13.5 gn	20.9 gn						
	(680 mg)	(875 mg)	(1354 mg)						
LG	11.4 gn	14.6 gn	22.7 gn						
	(739 mg)	(946 mg)	(1471 mg)						
XL	12.6 gn	16.2 gn	25.1 gn						
	(816 mg)	(1050 mg)	(1626 mg)						

- 1 = HIGH DEFINITION MATERIAL
- 2 = NEON MATERIAL
- 3 = SOLID COLOR MATERIAL
- = REFLECTIVE MATERIAL

O PRO TIP:

Applying arrow wraps: Ensure your hands are clean and free of contaminants that may adversely affect adhesion. Remove wrap from backing, placing wrap adhesive side up on a mouse pad or other semi-soft surface. Align shaft with the edge of the wrap and roll with steady motion and downward pressure. Once wrap is applied, roll the arrow between your hands to fully activate the adhesive. Place the index fletching over the wrap seam to help secure the wrap.

WRAP AROUND NUMBER DECAL

- 16 sets of numbers 1-12
- Fits arrows up to standard diameter:
 19/64"/ 0.296" (7.54mm)

501012WA -Number Decals







VISI-WRAP

- 3 sets of 12 highly reflective decal wraps
- Fits arrows up to standard diameter: 19/64"/ 0.296" (7.54mm)

501018BL — Bohning Logo **501018TS** — Tiger







SOLID AND REFLECTIVE WRAPS SOLID WRAPS WH **REF** WB NR NO NY NG **TL** Teal **BL** Blue PU HP • Indicate color code when Neon Red Neon Orange Blackout Black Neon Yellow Purple Hot Pink ordering • 13 wraps per pack 4" WRAP (101.6 mm) 501031 - 4" Standard 501032 - 4" Small 501033 - 4" XS **501034** — 4" Large 501035 - 4" XL 5.5" WRAP (139.7 mm) **501071** — 5.5" Standard **501072 –** 5.5" Small **501073 —** 5.5" XS **501074** — 5.5" Large **501075** - 5.5" XL 7" WRAP (177.8 mm) **501051** — 7" Standard **501052** — 7" Small **501053** — 7" XS **501054** — 7" Large 501055 - 7" XL 2 4 2 WEIGHT CODE (SEE TABLE PG. 16) **TIGER WRAPS** PATTERN WRAPS WT WRT **GWT WBT** ОТ PUT PT RTΥT GT BT • Indicate color code when White & Neon Red Tiger Green & White Tiger White Tiger White & Blue Purple Tiger ordering ■ 13 Wraps per pack 4" WRAP (101.6 mm) **501001** — 4" Standard **501002** — 4" Small **501003 -** 4" XS **501004 —** 4" Large **501005** — 4" XL 5.5" WRAP (139.7 mm) **501061** — 5.5" Standard **501062** — 5.5" Small 501063 - 5.5" XS **501064** - 5.5" Large **501065** — 5.5" XL 7" WRAP (177.8 mm) **501041** — 7" Standard **501042** — 7" Small 501043 - 7" XS **501044** - 7" Large 501045 - 7" XL WEIGHT CODE (SEE TABLE PG. 16)

PATTERN WRAPS

- Indicate color code when ordering
- 13 Wraps per pack

4" WRAP (101.6 mm)

501001 — 4" Standard

501002 — 4" Small

501003 — 4" XS

501004 — 4" Large

501005 — 4" XL

5.5" WRAP (139.7 mm)

501061 — 5.5" Standard

501062 – 5.5" Small

501063 — 5.5" XS

501064 — 5.5" Large

501065 - 5.5" XL

7" WRAP (177.8 mm)

501041 — 7" Standard

501042 — 7" Small

501043 — 7" XS

501044 — 7" Large **501045** — 7" XL



WEIGHT CODE (SEE TABLE PG. 16)





YAB CYE **CBL** CRD WTH WHD BIRCH WSPT HS Hot Sun CB Cool Blue CT Caution Tape **WLP** BS PATTERN WRAPS Whitetai Hunter White Spatter Blue Sky Target Face Blue Hawaiian White Leopard • Indicate color code when ordering • 13 Wraps per pack 4" WRAP (101.6 mm) **501001** — 4" Standard **501002** — 4" Small **501003 —** 4" XS **501004 —** 4" Large 501005 - 4" XL 5.5" WRAP (139.7 mm) **501061** — 5.5" Standard **501062** — 5.5" Small **501063** - 5.5" XS **501064** — 5.5" Large 501065 - 5.5" XL 7" WRAP (177.8 mm) **501041** — 7" Standard **501042** — 7" Small 501043 - 7" XS



WEIGHT CODE (SEE TABLE PG. 16)

501044 — 7" Large

501045 - 7" XL


231.229.4247

CUSTOM VANES AND WRAPS

To order or for more info call: 231-229-4247 - email: custom@bohning.com

YOUR LOGO





CUSTOM BLAZER VANES

- Color options:
 - Blazer Vanes:- Solid colors only
- Order 1,000 vanes minimum (must be single color)





YOUR LOGO



CUSTOM ARROW WRAPS

- Color options:
- Wraps: All colors including patterns
- Order 50 wraps minimum







ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!

NEW CUSTOM LOGO STICKERS

- Custom stickers with your logo or shop name
- Great for give-aways or for sale

CHOOSE YOUR STYLE and QUANTITY

- 4 Styles
- 100 Custom Stickers
- 300 Custom Stickers





STYLE 3 (CD3)





CHOOSE YOUR DESIGN

Choose one of our Custom Sticker Designs.

SEND US YOUR LOGO

Email your logo to custom@bohning.com Preferred Logo Formats: .png / .ai / .eps / .pdf / .jpg

CHOOSE YOUR QUANTITY

100 or 300 Custom Stickers

THAT'S IT!

We will send you Custom Stickers you can use as give-aways or sell

Have an idea for other custom stickers or banners? Contact us at custom@bohning.com

WHAT VANE SHOULD I USE?

With all the Bohing vane styles available, it is sometimes difficult to decide which is the best for you. Bohning offers 20+ unique vane styles and profiles. We have created the table below to help you in your decision making. Our recommendations are based mostly on the diameter of the arrow that is 'typically' used in the event listed. Keep in mind not everyone uses the same set-ups so the following should be used as a general guideline. Feel free to try out vanes for what you feel will work for your specific set-up. The choice is up to you! All Bohning vanes are the highest quality and come from our factory in Northern Michigan pre-primed, so there is no need to do anything to the vane prior to fletching them. All of our vanes are extensively tested for their specific uses and durability.

BOHNING VANE USAGE TABLE

Vane	Length	Hunting	3D	Indoor	Fita/Field	Xbow	Recurve	Height	Weight	Stifness
Air	2.0"				0		•	0.30"	4.5gn	7.0
Black Sky 2.0	2.0"		· V	, K	EFFEC	•		0.53"	- 6.1gn	8.5
Black Sky 3.0	3.0"					•		0.48"	8.5gn	8.6
Blazer	2.0"	4	3D	少 或	Q. K 9 & K	•		0.53"	6.1gn	6.0
Blazer X2	1.85"		3 D					0.44"	4.8gn	6.5
Bronco	3.0"	*		0	E AGG		•	0.45"	8.5gn	6.2
Bronco	4.0"			8			•	0.52"	12.5gn	5.7
Bully	2.0"	•	30			•		0.53"	6.1gn	8.5
Griffin	1.0"						•	0.21"	1.2gn	3.5
Griffin 2"	2.0"		3	1 × 1	0	0.51	NAU 18	0.46"	6.2gn	4.5
Heat	2.5"	•	31)					0.44"	6.1gn	9.0
Ice	3.0"		Ju 1	1/200	0	er valding	•	0.30"	6.5gn	7.0
X Vane	1.5"		31		0			0.35"	3.3gn	6.7
X Vane	1.75"		3 D		0	Ž	1 2/39	0.40"	4.3gn	6.7
X Vane	2.25"		31		0			0.36"	5.8gn	6.7
X Vane	3.0"	•	3			•	7 T. T.	0.48"	10.0gn	6.1
X Vane	3.5"	•	3 D	8		•		0.49"	11.6gn	5.8
хз	1.75"	726	3 D		0	B . 1860	31 36	0.40"	4.3gn	9.0
ХЗ	2.25"		3D		0			0.36"	5.8gn	9.0
Zen	4.0"	5 923	V. 18 18			8 (8.5)	S. 6 .	0.37"	12.5gn	6.5



2"LENGTH (50.8 mm)

BloZer

OPRO TIP

Made out of the

ultra-durable Blazer

vane material. Timetested, performance

proven.



(a) PRO TIP: Introduced in 2004, the Blazer Vane was designed for hunters and target shooters alike. The Blazer vane allows you to switch from field points to broadheads with minimal adjustment. This revolutionary product is still the #1 vane in the world.



BLAZER® VANE THE WORLD'S #1 VANE!

 All Bohning Vanes are pre-primed. No vane prep needed.

10831 — 36 pk 10832 - 100 pk 10833 - 1000 pk



STIFFNESS: 6.0



0

PRO TIP: Reader's Choice Gold

Best Fletching

since 2005. - Bowhunting

World







Blazer

Blazer





WT

White Tiger

GT Green Tiger

DTOM

Don't Tread on Me NY, or WH











6.1 GRAINS

(395 mg)





SL

Silver

RD











Blater

Grad Ban

0.53"HEIGHT (13.5 mm)

NO Blazer



HP

ОТ

PT Pink Tiger

FB

Fred Bear Made WH

Orange Tiger

BK



Blazer

BL Blue



BKO

NY

Neon Yellow

Blackout











101042CT

Caution Tape Combo

101042HS

RT Realtree® BR or WH



ALL COLOR VANE AND WRAP COMBO PACKS

- Designed to take arrow personalization to a new level with matching Blazer° vanes and wraps
- All Bohning Vanes are pre-primed. No vane prep needed.

101042

- Includes:
 - 12 arrow wraps (standard size)
 - 36 True Color Blazer vanes























2"LENGTH (50.8 mm)





0


PRO TIP:

Same great

Blazer vane with enhanced

graphics

© PRO TIP: One factor in choosing a vane is its stiffness. Bohning has developed a stiffness scale to help you dial in your perfect arrow setup. On a 1 to 10 scale, 1 is the most flexible and 10 is the stiffest.





· All Bohning Vanes are pre-primed. No vane prep needed.

10831 — 36 pk 10832 - 100 pk 10833 - 1000 pk













6.3 GRAINS

(408 mg)



CT

LE



Blocks

BbZsp







0.53"HEIGHT (13.5 mm)





Red and

GWF

Green and White Flame





CAMO White Flam















BF







HS

WSPT

White Spatter

BWFTS

B&W Flying Tiger Shark





- Designed to take arrow personalization to a new level with matching Blazer® vanes and wraps
- All Bohning Vanes are pre-primed. No vane prep needed.

101040


- Includes:
 - 12 arrow wraps (standard size)
- 24 True Color Blazer[®] vanes
- 12 white Blazer vanes











101040WSPT White Spatter Combo

No other vane manufacturer does color like Bohning. Our 4 color printing process gives us the ability to make you stand out in the crowd. With over 50 color choices of Blazer Vanes, you can make your arrow set-up unique. Remember at Bohning: "It's In Our Vanes!"



















- Includes:
- 12 white Blazer vanes
- 24 color Blazer[®] vanes
- All Bohning Vanes are pre-primed. No vane prep needed.

101050 — 36 pk













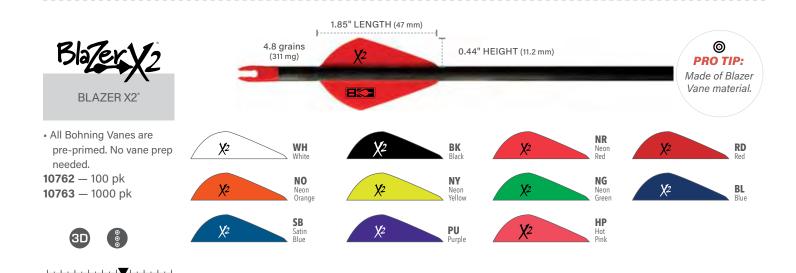

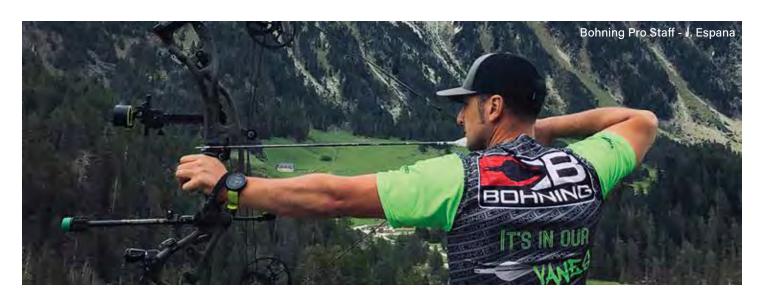



ALL BOHNING VANES ARE:



X VANE

- Made of Blazer° vane material
- All Bohning Vanes are pre-primed. No vane prep needed.

10771 — 36 pk **10772** — 100 pk **10773** — 1000 pk

































2.25" VANE (57.2 mm)


































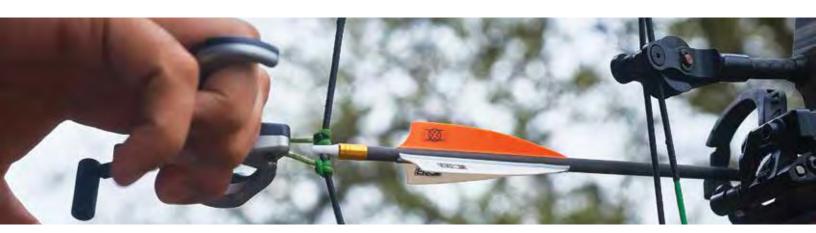



Purple











ALL BOHNING VANES ARE:

NR

Neon Red

NG

Neon Green

PU

Purple

***HEAT**


HEAT VANE

- Made out of the ultra-stiff Heat® vane material for maximum arrow stabilization, arrow control, and quiet flight
- All Bohning Vanes are pre-primed. No vane prep needed.

101036 — 36 pk 101037 - 100 pk 101038 - 1000 pk



2.5" LENGTH (63.5 mm) 6.1 grains 0.44" HEIGHT (11.3 mm) 0 SHEAT (395mg) PRO TIP: Blazer Bond or Fletch-Fuse glues are 83 recommended for this vane.

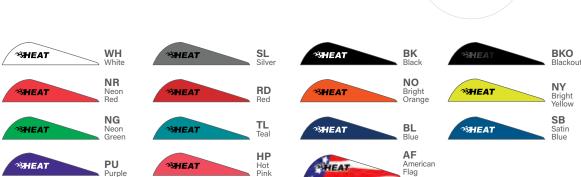

X3° VANE

- Made out of the ultra-stiff Heat® vane material for maximum arrow stabilization, arrow control, and quiet flight
- All Bohning Vanes are pre-primed. No vane prep needed.

101051 — 36 pk **101052** - 100 pk 101053 - 1000 pk








1.75" AND 2.25" VANE (44.5 mm and 57.2 mm)



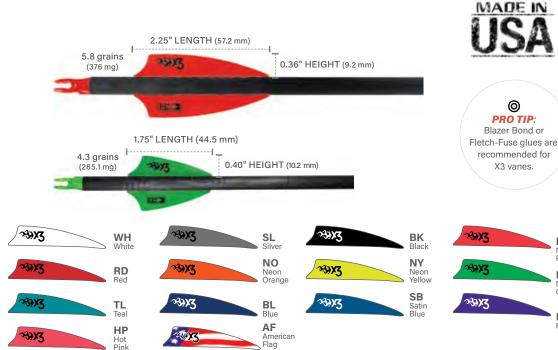













VANES




BULLY™ VANE

- Bohning designed in cooperation with Easton.
- The 2" Blazer design mirrors the world's #1 hunting vane's dimensions in a quieter, stiffer material

10871 — 36 pk **10872** — 100 pk 10873 - 1000 pk











BLACK SKY 2.0

- Blazer Vane profile
- Stiffer and quieter vane material
- Ideal for high-speed rail-less crossbows

10901 — 36 pk 10902 - 100 pk

10903 - 1000 pk









0

Bolts!




BLACK SKY 3.0

BLACK SKY

- Lower Profile vane
- Stiffer and quieter vane material
- Ideal for high-speed railed crossbows

10911 — 36 pk **10912** — 100 pk **10913** - 1000 pk



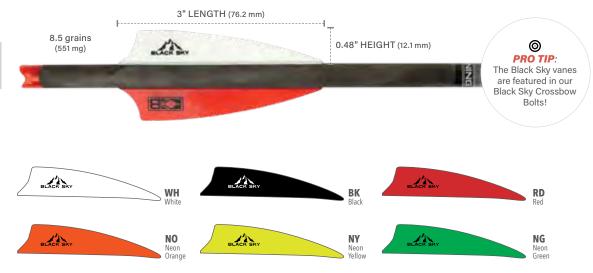



Z) E N



4" LENGTH (101.6 mm)





0.37" HEIGHT (9.4 mm)








- Made of Blazer* vane material
- Solves clearance issues when using large diameter shafts
- All Bohning Vanes are pre-primed. No vane prep needed.

101047 — 36 pk **101048** — 100 pk **101049** — 1000 pk




12.5 grains

(810 mg)



3" LENGTH (76.2 mm)





ALL BOHNING VANES ARE:






- Made of Blazer[®] vane material
- Ideal for minimizing crosswind drift
- All Bohning Vanes are pre-primed. No vane prep needed.

101021 — 36 pk

101022 - 100 pk


101023 — 1000 pk





6.5 grains

(421 mg)

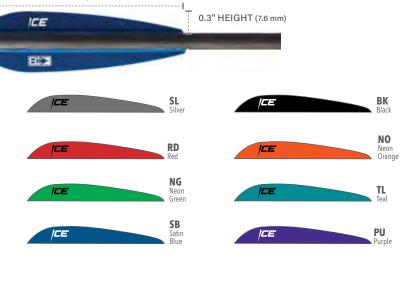

VANES ARE:

ALL BOHNING













- Made of Blazer[®] vane material
- All Bohning Vanes are pre-primed. No vane prep needed.

10501 — 36 pk

10502 — 100 pk

10503 - 1000 pk




















STIFFNESS: 5.7






AIR° VANE

- Made of Blazer[®] vane material
- Great for long distances and smaller diameter shafts
- Ideal for minimizing crosswind drift
- All Bohning Vanes are pre-primed. No vane prep needed.

101026 — 36 pk **101027** — 100 pk **101028** — 1000 pk



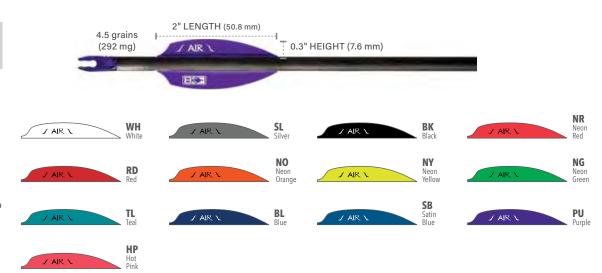




ENGINEERED FOR GREATNESS

1" GRIFFIN VANE

- For Olympic recurve and compound using micro-diameter arrows
- Only 1.2 grains in weight (78 mg)
- Made of extremely durable, non-deforming vane material
- Twisted ribbon design aids in arrow rotation spins twice as fast as mylar style vanes
- Provides stable, accurate flight in any wind conditions
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs
- All Bohning Vanes are pre-primed. No vane prep needed.

101055 — 40 pk



1" LENGTH (25.4 mm) 1.2 grains (78 mg) WH White SL Silver Black NO Neon Orange Yellow NG Neon Green SB Satin Blue


2" GRIFFIN VANE

NEW

- •Twisted ribbon design for compound bows
- •The most innovative vane since the Blazer Vane!
- Designed to set you apart from the crowd
- Built in Helical Allows for straight fletching
- Provides superior rotation of the arrow
- Durable injection molded vane
- Straight base makes fletching easy
- Includes clamp adapter for Pro Class style jigs
- All Bohning Vanes are pre-primed. No vane prep needed.

101055 — 40 pk



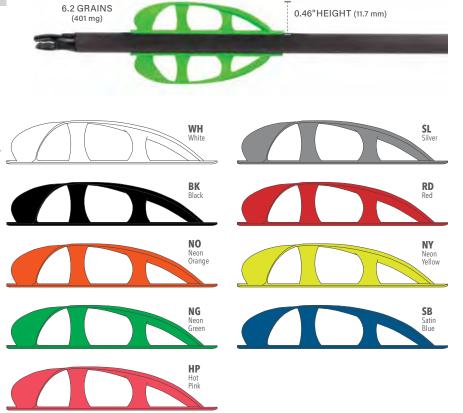

2"LENGTH (50.8 mm)

CROSSBOW PRODUCTS







CROSSBOW PRODUCTS



BLACK SKY 2.0 CROSSBOW BOLTS

BOLT INFO:

- (3) 20" Crossbow Bolts
- 400 Grain Total Weight
- +/- 0.003 Straightness

VANE INFO:

- 2" Blazer Vane Profile
- Stiffer and quieter vane material
- Ideal for high-speed rail-less crossbows


PREMIUM POINT INFO:

- 100 Grain Stainless **Bohning Premium Point**
- Guaranteed +/- 0.25 weight
- Guaranteed within 0.001" concentric

BOHNING XBOW NOCK:

- Bohning's .300 Crossbow nock

A221NG2-3 - Black Sky 2.0 Bolts (3 Pack)





BOLT INFO:

- (3) 20" Crossbow Bolts
- 400 Grain Total Weight
- +/- 0.003 Straightness

VANE INFO:

- 3" Shield Cut Vanes
- Lower Profile vane 0.48"
- Stiffer and quieter vane material
- Ideal for high-speed railed crossbows

PREMIUM POINT INFO:

- 100 Grain Stainless **Bohning Premium Point**
- Guaranteed +/- 0.25 weight
- Guaranteed within 0.001" concentric

BOHNING XBOW NOCK:

Bohning's .300 Crossbow

A221RD3-3 - Black Sky 3.0 Bolts (3 Pack)



READY TO PERFORM



BLACK SKY 3,0

USA **BLACK SKY 3.0 VANES:** Lower profile vane Stiffer and quieter vane material Ideal for high-speed railed crossbows BLACK SKY **HEIGHT:** WH 0.48"(12.1 mm) LENGTH: 3"(76.2 mm) RD See Page 27 for Details

USA **BLACK SKY 2.0 VANES:** Blazer Vane profile Stiffer and quieter vane material Ideal for high-speed rail-less crossbows **HEIGHT:** NG 0.53"(13.5 mm) Green LENGTH: 2"(50.8 mm) BLACK SKY WH See Page 27 for Details

CROSSBOW PRODUCTS

LIGHTNING

for reduced friction and increased velocity

· Silicone-based, odorless

 No-mess foam applicator Provides a protective film

1363 — 1.18 oz (35 ml) tube **941019** — 16 pk bulk **941019BOWL** - Bowl and 16 pk 1363-250 - 250 Tubes

rail lube


BRUIN AND QUIVERS LYNX° QUIVERS Details on page 34

TOP MOUNT

LIGHTNING LUBE™







Parallel quiver mounting system

801012

- Installs easily to the right or left side of the sight rail without removing the scope
- Slim and adjustable design allows for easy access to arrows and reduction in forward weight of crossbow
- Includes both allen head and thumb screw









- Includes:
 - 1 tube of Lightning Lube 1.18 oz (35 ml)
 - 1 tube of Xccelerator Wax 0.57 oz (16.1 grams)

801005

MULTI-FLETCHER®

- Fully adjustable to accommodate all arrow diameters including crossbow bolts and micro arrows
- Capable of fletching crossbow bolts up to 0.42" (10.7 mm) OD
- Can fletch 1° to 3° right, 1° to 3° left, or straight
- See page 5 for more information

601055 - Multi-Fletcher®

CROSSBOW NOCK



11.0 grains (713 mg)

.300" Half Moon Nock (7.70 mm)

401008 — 12 pk **401009** — 100 pk **401010** — 1000 pk



CROSSBOW SERVING THREAD



- Designed for high performance crossbow strings
- 0.030" (0.76mm)
- Contains 45 yards (41.1 m)

801011BK- 0.030" (0.76mm)

QUIVERS

BRUIN

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with the Lever-Lock mounting system
- 2" (5 cm) vertical adjustment to fit your bow/ crossbow perfectly

201030 - Indicate hood and liner color

HOOD COLOR CHOICES





LINER COLOR CHOICES



Mossy Oak® Break-up Country



Realtree




USA













O CROSSBOW **COMPATIBLE**

201030BKRD



201030BKBK

201030CFRD



201030CFBK



201030MOC



201030RE



LYNX°

- Dual-retainer quiver
- Molded hood and liner for quiet storage of any broadhead style
- · Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

1038 — Black

201013RE — Realtree Edge°

201013MOC — Mossy Oak® Break-Up Country

HOOD COLOR CHOICES



BK Black







MOC Break-up Country





CROSSBOW **COMPATIBLE**

1038



201013RE





LEVER LOCK

- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click)

1073 — Lever Lock

QUIVERS

POCKET QUIVER

- Dimensions: 3.75" x 5.125" x 1.25" (95 mm x 130 mm x 32 mm)
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Made in USA

201035BK - Pocket Quiver

Replacement Parts 201036BK - Body 201037BK - Clip 201038 - Retainer Cap









Securely holds 6 arrows or bolts

POCKET QUIVER SNAPFIT DISPLAY

Order 12 Pocket Quivers and receive a free SNAPFIT table top display. Great for impulse point of purchase buying

201035BK-12SF





BOW CASES



ADULT BOW CASE

- Dimensions: 44.5" (113 cm)
 x 19.5" (50 cm)
- Fits bows up to 37" (94cm) axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura[®] Nylon





ADULT BOW CASE INTERIOR - COLOR MAY VARY Interior dimensions: 43.5" x 18" (110.5 cm x 45.7 cm)

701037



YOUTH BOW CASE

- Dimensions: 40" (102 cm)
 x 15.8" (40cm)
- Fits most youth bows (including Genesis*)
- Outer arrow storage pocket and 3 zippered interior pockets





YOUTH BOW CASE INTERIOR Interior dimensions: 38" x 15" (96.5 cm x 38.1 cm)

701036



ADULT TARGET QUIVER

- 4 high capacity, durable, solid base arrow tubes
- Each tube easily fits 6 standard sized arrows
- 2 zippered storage compartments:
- Easy to access mesh and pencil storage areas
- Constructed with premium Cordura[®] and Ripstop nylons
- Superior durability and water repellent
- Fits up to 3" (7.5 cm) belt



ACCESSORY POUCH

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant

701040BK

 Strong and comfortable belt Loop - Fits up to 2.5" (6 cm) belt

BLACK SKY™

TUBE QUIVER

- Dimensions: 19" (48 mm)
- 2 high capacity, durable, solid base arrow tubes
 - Each tube easily fits 6 STD sized arrows
- Ambidextrous
- Mesh storage pocket

701029

701041BK



Arrow Tubes: 17" (43 cm) long - 1.2" (3 cm) l.D. Main Pocket: 1" (28 cm) x 5" (13 cm) Upper Pocket: 4.5" (11 cm) x 5" (13 cm)



Dimensions: 6.25" (16 cm) Width 5.75" (15 cm) Height 3.5" (9 cm) Depth



(2) Arrow Tubes: 18"+ (457 cm) long - 1.2" (30 cm) I.D.

ACCESSORIES

SHOOTER STOOL

- Double stitched and reinforced bag with multiple storage compartments and built in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)

701058BK — Stool with arrow tubes/umbrella holder

 $\textbf{701055BK} - \mathsf{Stool} \ \mathsf{only}$





BUILT IN COOLER



ACCESSORIES

3-STRAP ARMGUARD



- Made of heavy-duty cordura double stitched to prevent fraying
- Protects arm and holds loose clothing away from bow strings
- Adjustable quick disconnect buckle straps

1689

SLIP-ON ARMGUARD

- Durable yet flexible and soft compression-fit material
- Easy on and off; protects the entire forearm


801009

COLOR CHOICES



SLIP-ON ARMGUARD SIZING (APPROXIMATE)						
SIZE	LENGTH	SMALL END RELAXED	LARGE END RELAXED	SMALL END STRETCHED	LARGE END STRETCHED	
S	8" (20.3 cm)	5.5" (14.0 cm)	8" (20.3 cm)	9" (22.9 cm)	12" (30.5 cm)	
M	9" (22.9 cm)	7" (17.8 cm)	9" (22.9 cm)	12" (30.5 cm)	14" (35.6 cm)	
L	9" (22.9 cm)	11" (27.9 cm)	12.5" (31.8 cm)	15" (38.1 cm)	18" (45.7 cm)	

D-FLECTOR ARMGUARD



- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center

801092





ACCESSORIES

BROADHEAD WRENCH

ARROW LUBE

WIND CHECK

BOW GRIP/SIGHT WINDOW PAD



- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point
- Color may vary

1619





- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based
- Available in a fishbowl display

301023 — 1.18 oz tube (35 ml)

BULK OPTIONS: 301023-16 - 16 Tubes **301023-250** - 250 Tubes **301023BOWL** - Bowl + 16 pk



- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy one-hand use

1612 — 0.21 oz (6 grams)



- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak® Break-Up Infinity

1602 - 2 Pads


UNIVERSAL ARROW BOX



- Each box holds 12 arrows, up to 36" (91 cm)
- Dimensions: 36.5" x 6" x 2.5" (93 cm x 15 cm x 6 cm)

1623 — 50 pk

"BOA" AND "PYTHON" ARROW PADS



- Boa holds 12 arrows of any size
- Python holds 12 arrows
 Sizes .219" (5.56 mm) to .359" (9.12 mm)

16092 — Boa (1 Pad) **801047** — Python (1 Pad)

ARROW PEN FERRULES



- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to Bic® Cristal (not included)

990004BK

STRING ACCESSORIES



- Get the clearest site picture possible
- Easy to use serve-less design eliminates the need to serve in the peep
- Saves time and money
- 3 optically perfected clarifier lenses
- Kit comes wit:
 - · Peep-It Pro
 - 6 Apertures
 - 3 Clarifier Lens
 - 2 Set-Screws
 - Set Screw Tool
 - Plunger Suction Cup (for installation)
- Available in 3 colors
- Available in 37° or 45° (see table below)
- Made in the USA

802050BK37 — Black Peep It 37° **802050BK45** — Black Peep It 45°

802050BL37 — Blue Peep It 37° **802050BL45** — Blue Peep It 45°

802050RD37 — Red Peep It 37° **802050RD45** — Red Peep It 45°

PEEP- IT PRO CLARIFIER KIT REPLACEMENT PARTS AND ADDITIONAL LENSES

PART#	DESCRIPTION	
802052-1/32	Biasing Aperture 1/32	
802052-3/64	Biasing Aperture 3/64	
802052-1/16	Biasing Aperture 1/16	
802052-3/32	Biasing Aperture 3/32	
802052-1/8	Biasing Aperture 1/8	
802052-5/32	Biasing Aperture 5/32	
802053GD05	Clarifier Lens Gold 0.5	
802053YE10	Clarifier Lens Yellow 1.0	
802053BL15	Clarifier Lens Blue 1.5	
802053GR20	Clarifier Lens Green 2.0	
802053RD30	Clarifier Lens Red 3.0	
802054	Peep it Plunger Suction cup	
802055	Peep It Plunger .130" Set Screw	
802056	Peep It Plunger .200" Set Screw	
802060	Peep It Pro Set Screw Tool	



PRO TIP; WHAT IS A CLARIFIER?

A clarifier lens is used in your peep when using a magnification lens in your front sight. This "clears up" the target while minimizing the fuzziness on the pin at full draw giving you the sharpest site picture possible.



COLOR CHOICES








RD Red

USE THIS TABLE TO CHOOSE 37° OR 45° PEEP IT

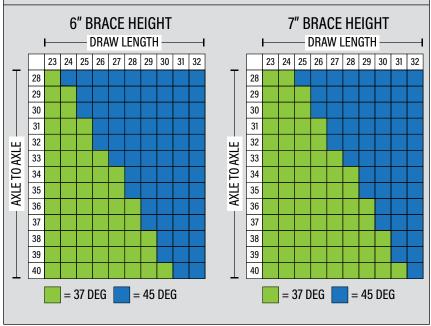

STRING ACCESSORIES

SERVE-LESS PEEP IT®

Serve-less peep site

Durable construction

Time saver installs without
 Made in USA

serving

SERVE-LESS PEEP IT SERVE-LESS PEEP IT 24 PACK

802002 — 1/8"* **802012** — 1/8"* **802016** — 3/16" **802003** — 3/16" **802004** — 7/32" **802014** — 7/32" **802005** — 1/4" **802015** — 1/4"

WITH ALIGNER* WITH ALIGNER - 24 PACK*

802006 — 3/16" **802026** — 3/16" **802007** — 7/32" **802027** — 7/32" 802008 - 1/4"**802018** — 1/4"

THREADED* THREADED - 24 PACK* **802009** - 1/8" **802019** — 1/8"

802010 — 1/4" **802011** — 1/4"

^{*} available in black (BK) only

CONVERSION CHART					
1/8"	0.125"	3.18 mm			
3/16"	0.187"	4.76 mm			
7/32"	0.218"	5.54 mm			
1/4"	0.250"	6.35 mm			



O PRO TIP:

PERFECTLY ALIGNED FOR A CLEAR SIGHT PICTURE. The Peep It stays in place even better than a standard tied-in peep sight. It is also available as a Threaded Peep It, which accepts clarifiers, verifiers, and Peep It with aligner.

SERVE-LESS ANCHOR KNOT

- Serve-less cable attachment for drop away rest cord
- Time Saver
- Durable construction
- Made in USA

802001 — Anchor Knot 802017 - 24 Anchor Knots



color choices

(0) PRO TIP:

INSTALL A PEEP SIGHT IN 10 SEC Bohning's Serveless Peep It® and Anchor Knot are huge time savers because you don't need to serve them.

No more accidentally cutting or burning your bowstring during the peep removal process!

41

STRING ACCESSORIES











KISSER BUTTON

- Helps maintain a consistent anchor point every shot
- Lightweight and durable, 0.5" (12.7 mm) diameter
- Easy installation with 2 enclosed clips

1664 — Kisser w/ clips **801081** — 100 pk

"SLIM" PEEP

- Durable, high-impact and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm) tubing, bulk peeps do not

1668 — Peep with tube **1640** — 50 pk (peep only)

STRING WHISKERS

- Two pieces per package,
 4.5" (11.4 cm) long each
- Dampens string noise and oscillations with round whiskers
- Easy to use
- Ties to bowstring

1051 — 1Pair **1635** — 50 Pair



String Whiskers reduce vibration in your bow's string, reducing the noise created when shooting your bow. They can also be used as a way to judge wind speed and direction!

STRING NOCKS

- Creates a positive nocking point for consistent shots
- Quick and easy to install

Hunter (black liner): for 12-14 strand strings —5.4 grains (350 mg)

Cam (red liner): for 16-18 strand strings —7.4 grains (480 mg)

Cam String Nocks

1065 — 6 pk

1068 — 100 pk

1071 — 1000 pk

Hunter String Nocks

1064 — 6 pk


1067 — 100 pk

1070 — 1000 pk

STRING SEPARATOR

- Fast and easy installation of serving, peeps, silencers, etc.
- Easily inserts into strands without damaging, twist into separate strings
- 2" (50.58mm) x .625"
 (15.87mm) x 1" (25.4mm)

1601 - Separator

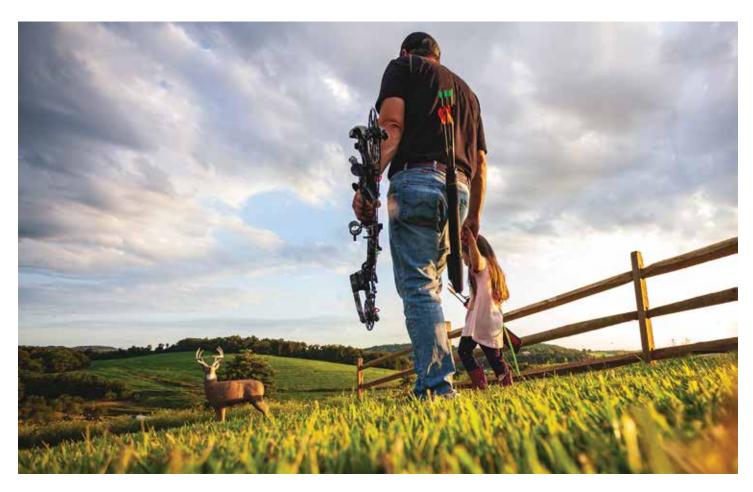

SERVING



POWERGRIP

- A blend of tightly braided Spectra and nylon yarn
- Resin coated for durability and good grip
- 0.021" (0.53mm) Contains 75 yards (68.6 m)
- 0.025" (0.64mm) Contains 50 yards (45.7 m)

801034 — 0.021" (0.53mm) **801035** — 0.025" (0.64mm)



NYLON SERVING THREAD

- Traditional nylon serving thread
- Use for end serving, peeps and nocks
- 0.018" (0.46mm) Contains 100 yards (91.4 m)

1616 — 0.018" (0.46mm)



CROSSBOW SERVING THREAD

- Designed for high performance crossbow strings
- 0.030" (0.76mm) Contains 45 yards (41.1 m)

801011BK- 0.030" (0.76mm)



#62 BRAID **SERVING THREAD**

- · Braided for superior grip and durability
- 0.021" (0.53mm) Contains 75 yards (68.6 m)
- 0.025" (0.64mm) Contains 60 yards (54.9 m)

1626 — 0.021" (0.53mm) **1627** — 0.025" (0.64mm)



HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" (0.36mm) white turns clear when served tightly
- 0.014" (0.53mm) Contains 120 yards (109.7 m)
- 0.021" (0.64mm) Contains 75 yards (68.6 m)
- 0.024" (0.64mm)

Contains 45 yards (41.1 m)

801031 — 0.014" (0.36mm) **801032** — 0.021" (0.53mm) **801033** — 0.024" (0.61mm)



#62 XS **SERVING THREAD**

- 20% stronger than regular serving thread
- 0.018" (0.46mm) Contains 100 yards (91.4 m)
- 0.021" (0.53mm) Contains 75 yards (68.6 m)

801001 — 0.021" (0.53mm) **801010** — 0.018" (0.46mm)

COLOR CHOICES





RD



NG



LOOP ROPE

• 0.196" (2.0 mm) BCY #24 polyester D-loop rope

801002 - 39" (1m) 801003 — 100 ft (30.5m)

COLOR CHOICES





SERVE-TITE

- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- No thread included

16150 - Tool Only

COLOR CHOICES







THE STRIP-PRO

- Strips your arrow shaft of all fletchings, glue and arrow wrap
- New and improved handle for better grip/ease of use.
- Safe for all arrows/diameters
- Extra blade storage in Handle
- Replacement blades available

1524 — Strip-Pro 801026 - Blades: 3pk

SSR

- Concentrated cleaning powder removes dirt, grease, residue and contaminants
- For carbon, aluminum and fiberglass shafts
- Use on a scour pad with hot water to scrub, then rinse

801052 — Single-use pk - 1 tsp (4.9 ml) 801053 — Shaker bottle - 2.65 oz (78.4 ml)

PRO TIP

TO REMOVE FLETCHINGS:

Use the "Strip-Pro" by Bohning to strip the fletchings from arrow shafts. Clean with SSR powder on a scour pad to prepare for new fletching.

PRO TIP:

3 WAYS TO REMOVE WRAPS:

- 1. Use the "Strip-Pro" to remove the wrap.
- 2. Use a hair dryer to soften the adhesive and peel the wrap.
- 3. Use boiling water to soak the wrapped arrow shafts in and peel the wrap off once softened.

To remove remaining wrap adhesive, use SSR powder on a scour pad in hot water to scrub off.







BOW SQUARE

- No more having to guess or clip and unclip the bow square continuously to ensure the loop is in the correct place! Simply slide the indicator back and forth as need to start and finish your D-loop or nock sets.
- Easy to read brace height measurements
- Use your own nocks for the most accurate fit possible
- Use the flat side to check cam lean of your bow









CROWN DIPPING AND CRESTING

Bohning offers many options for this purpose, ranging from clearcoats to white or colors, in both solvent-based and water-based finishes. Bohning offers water-based Crest-Lac paint, which is very low odor, easy to thin to your desired consistency using distilled water, and is easy to clean up.

Bohning's Fletch-Lac paint is the original solvent-based arrow paint, it is time tested, covers all arrow surfaces extremely well with minimal coats, and thins well with Bohning Fletch-Lac Thinner.

Crown dipping for both Fletch-Lac and Crest-Lac paint, follow the steps below for the best arrow finish:

- 1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For Carbon or Aluminum arrows, scrub shaft surface with Bohning SSR powder on a scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
- 2. Pour paint into dip tube making sure to adjust the viscosity (thickness) with the correct thinner for the paint that you are using. Stir paint, allow to sit for 20 minutes, pop any surface bubbles in the paint.
- 3. Hang arrows using the Bohning Arrow hanger.
- 4. Plug hollow arrows with Bohning Dip'n Plug ring.
- 5. Dip arrows to the desired depth in the paint, pull out of paint until paint starts to drip, then dip the arrows back into paint. Allow the paint to stream off the shafts until it is just dripping and then hang to dry over a surface that can collect the excess paint.
- 6. Allow paint to dry completely before coating with another paint or clearcoat. If coating with another paint, it is recommended that you lightly sand the painted surface of the shaft and then wipe with a tack cloth.
- 7. Pour leftover paint back into cans to save for the next round of arrows.

Cresting for both Fletch-Lac and Crest-Lac paint.

- 1. Clean arrow shaft.
 - a. For wooden arrows, sand and then wipe with a tack cloth.
 - b. For carbon or aluminum arrows, scrub the shaft surface with Bohning SSR powder and a dish scour pad, scrubbing in a single direction, rinse with hot tap water and then stand upright until fully air dry.
 - c. For Dipped/Painted arrow shafts: Wipe dipped/painted end of shaft with a tack cloth.
- 2. Mix desired paints. Determine your desired cresting pattern.
- 3. Place arrow onto the Bohning Crester, making sure to put the nock end tight against the arrow stop.
- 4. Proceed with cresting the arrow. Leave the crester spinning with the arrow in place until the paint is dry.
- 5. If a clearcoat top coat is desired for the arrow, using Crest-Lac clear is strongly recommended as it will not dissolve the cresting lines.

For unfinished wooden arrows, a finish is essential for the entire arrow shaft.




PROFESSIONAL CRESTING KIT

- The kit includes:
 - One crester (made with maple base)
 - Six 1 oz jars of Crest-Lac paint:black, red, yellow, blue, silver, and gold
 - Four paint brushes:Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with English and metric doubles as pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V

801083 — Cresting Kit **801084** — Crester Only





DIP KIT

- Includes:
 - 1 glass dip tube
 - 1 arrow hanger
 - 2 pints (946 ml) of white Crest-Lac
 - 2 pints (946 ml) of clear Crest-Lac
 - 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

801094 — Dip Kit

801085 — Cresting Kit and Dip Kit Combo

801095 — Dip Tube

801098 — Arrow Hanger

801100 — Dip'n Plug Ring





FLETCH-LAC

- Industry standard for over 50 years top choice of custom arrow shops worldwide!
- · Solvent-based cresting paints that dry to a hard, chipresistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

1412 — 1 oz Jar (17.2 ml)

1105 — Pint (473.1 ml)

1106 — Quart (946.4 ml)

1107 — Gallon (3.79 I)

GLOSS COLOR CHOICES















FLORESCENT COLOR CHOICES







matte color









PRO TIP:

Fletch-Lac: If thinning is desired, use Fletch-Lac Thinner sold on pg 48



CREST-LAC

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

301011 — 1 oz Jar (17.2 ml)

301014 — Pint (473.1 ml)

301012 — Quart (946.4 ml)

301013 — Gallon (3.79 I)

GLOSS COLOR CHOICES





















FLORESCENT COLOR CHOICES





















PRO TIP:

Crest-Lac If thinning is desired, use distilled water NOT paint thinner

FLETCH-LAC SEALANTS



CLEAR & BLUE CLEAR

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

1124 — BC/CL Pint (473 ml) **1125** — BC/CL Quart (946.4)

1126 — BC/CL Gallon (3.79 I)

SUPERCOAT

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

1120 — Supercoat Pint (473 ml)

1121 — Supercoat Quart (946.4)

1122 — Supercoat Gallon (3.79 I)

O PRO TIP:

- All Bohning clearcoats can be used to seal wooden arrows.
- DO NOT apply Fletch-Lac Clearcoat, Blue Clear, or Supercoat on top of cresting.
- All clearcoats can be used over white crown-dipped arrows.
- Always allow the first coat of paint to dry before applying
- Clearcoat and Blue Clear are the same formula and thickness.
- Clearcoat and Blue Clear will seal arrows.
- Blue Clear has an additional bluing agent added to it.
- Bluing is added to make what is underneath it brighter/ whiter.
- Supercoat is not much thicker but leaves a slightly thicker more protective film behind when dry.
- Supercoat is applied the same as the others and dries in a similar time.

All Bohning Clearcoats can be used interchangeably.

FLETCH-LAC THINNER

THINNER

- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

1131 — Pint (473 ml)

1132 — Quart (946.4) 1133 — Gallon (3.79 I)

FEATHER-DRI



- · Protect your feather fletchings from the weather
- Colorless, odorless, water-repellent powder
- Includes bag to shake powder onto fletched feathers
- Environmentally safe

1611 - 250 mL Feather Dry Water Repellent

FEATHER TOWER®



• See page 3 for more information

601010 - Feather Tower Fletching Jig

BRIGHTLINE PRO

BRILLIANT WATER-BASED ENAMEL PAINT DURABLE FINISH - LOW FUMES



BRIGHTLINE PRO PAINTS

Our Brightline Pro is a water-based, brilliant colored, durable, low VOC paint especially developed for Air Spraying, Brushing and Dipping of wood, metal or plastic parts and crafts. Its user friendly, easily thinned with distilled water and clean-up is a snap. 22 colors available.

Extensive heat, humidity, and temperature testing. Developed and made in the USA. Coats and seals for a durable gloss finish!

302020 - Brightline Pro Paint (Specify Color Code)

See www.bohningcreative.com for more details



Bohning Creative Products Website URL



Durable
Brilliant Colors!

BRIGHTLINE PRO COLORS

White (WH)
Black (BK)
Red (RD)
Orange (OR)
Yellow (YE)
Green (GR)
OD Green (OD)
Teal (TL)
Purple (PU)
Magenta (MG)

Neon Red (NR) Neon Orange (NO) Neon Yellow (NY) Chartreuse (CH) Neon Green (NG) Hot Pink (HP) Copper (CO) Silver (SL) Gold (GO) Pearl (PL) Clear (CL)









DISPLAYS





301023BOWL Arrow Lube - 16 pk

IMPROVE POINT OF PURCHASE SALES

Stock our most popular adhesives and waxes in these handy fishbowl displays. Put them near your cash register. Every archer needs these products, so make it easy for them to find and purchase. Save money on packaging and restocking these with bulk purchases!



301025BOWL Fletch Fuse - 24 pk



STOCKED SNAPFIT ™ DISPLAY

- Shelf capacity: 5 lbs (2.3 kg) per 4" panel
- Hook capacity: 1 lb (.45 kg) per hook
- Made from engineeringgrade, recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for nonmarring stability
- Slots in column caps accommodate standard foam board signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays

CALL A BOHNING REP FOR MORE DETAILS AND ORDERING: 231 - 229 - 4247

ALL DISPLAYS:





DISPLAYS

CUSTOM LOGO STICKERS

- Custom stickers with your logo or shop name
- Great for give-aways or for sale

CHOOSE YOUR STYLE and QUANTITY

- 4 Styles
- 100 Custom Stickers
- 300 Custom Stickers



STYLE 3 (CD3)





STYLE 4 (CD4)



CHOOSE YOUR DESIGN

Choose one of our Custom Sticker Designs.

SEND US YOUR LOGO

Email your logo to custom@bohning.com Preferred Logo Formats: .png / .ai / .eps / .pdf / .jpg

CHOOSE YOUR QUANTITY

100 or 300 Custom Stickers

THAT'S IT!

We will send you Custom Stickers you can use as give-aways or sell

Have an idea for other custom stickers or banners? Contact us at custom@bohning.com

BOHNING BANNER

- 24" x 48" Vinyl Banner
- 61cm x 122cm Vinyl Banner
- Show off your Bohning Pride
- Great for your shop, range or garage

BANNER-USA - USA Flag Bohning Banner **BANNER** - Red Bohning

Banner

BANNER-USA



BANNER



POCKET QUIVER SNAPFIT DISPLAY

- Order 12 Pocket Quivers and receive a free SNAPFIT table top display. Great for impulse point of purchase buying
- Refill with a 10 pack

201035BK-12SF 201035BK-10 - 10 Pack



APPAREL



BLUE RETRO LOGO HOODIE

Comfortable standard fit sweatshirt with a retro style Bohning Logo. Jersey lined hood and metal eyelets.

- 55/45 cotton/polyester
- Sm-3XL

701060BRL



BLUE RETRO LOGO TEE

Lightweight, roomy and highly breathable, these moisture-wicking, value-priced tees feature PosiCharge technology to lock in color and prevent logos from fading.

■ Sm-3XL

701009BRL



SHOOTER JERSEY

- Fabric Content 100% polyester, 3 oz
- Moisture management/antimicrobial performance fabric
- Sm-3XL

701075



BOHNING SEASON HOODIE

Cozy sweatshirt in our core weight.

- 7.8-ounce, 50/50 cotton/poly fleece
- Air jet yarn for a soft, pill-resistant finish
- Sm-3XL

701061BS



BOHNING SEASON TEE

An indispensable t-shirt in our classic silhouette

- 5.4-ounce, 100% cotton
- 50/50 cotton/poly
- Sm-3XL

701009BS



BLACK SKY LONG SLEEVE

- Black Sky logo front Bohning on sleeve
- 50/25/25 poly/combed ring spun cotton/rayon
- 4.5-ounce
- Sm-3XL

701001BKS



BLUE RETRO LOGO

An ultra-breathable cap with the patented Flexfit stretch for a comfortable fit. 701004BRL - SM/MED 701004BRL - LG/XL

REALTREE°

- RealTree[®] Camo hat with distressed Bohning patch
- Hook and loop closure

701004RT

LEATHER PATCH

- Leather Bohning patch
- Mesh back
- Adjustable snap back

701043LTH

DISTRESSED BROWN

- Bohning's best seller
- Mesh back
- Adjustable snap back

701043TR

BLACK SKY

RIchardson 112 original trucker hat

- Raised embroidery on front logo. Bohning logo on the side of hat
- Adjustable snap back

701043BKS

REPLACEMENT PARTS

ADHESIVES

1304 — Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)

13032 — Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)

1316 — Alcohol Burner Replacement Wick

1134 — Platinum Thinner* - 1 Pint (473.1 ml)

*PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING. ONLY USE PLATINUM THINNER WITH PINT, QUART, OR GALLON SIZES OF PLATINUM THAT HAVE THICKENED WITH TIME.

CRESTING AND DIPPING

1400 — Hair Line Cresting Brush

1401 - 1/8" Cresting Brush (3.18 cm)

1402 - 1/4" Cresting Brush (6.35 cm)

1403 - 1/2" Cresting Brush (12.7 cm)

801095 - Dip Tube 801098 - Arrow Hanger 801100 - Dip'n Plug Ring

FLETCHING JIGS

Blazer® Jigs and The Big Jig

1319 — Clamp Release Tape, 3 pieces

13192 — Clamp Release Tape Bulk Pack, 21 Pieces

8250 — Blazer Straight Clamp

8251 — Blazer 3° Right Helical Clamp

8361 — Big Jig 3° Right Helical Clamp

8362 - Big Jig 1° Right Offset Clamp

601004 - Crossbow Receiver / Adapter

601009 - 4 Fletch Disk Adapter

Multi-Fletcher®

601056 - Multi-Fletcher Clamp

601057 - Insert, 3° Right Helical

601058 - Insert, 1° Right offset

601059 - Insert, Straight

601060 - Insert, 1° Left Offset

601061 - Insert, 3° Left Helical

601062 - Insert, Feather 2° Right Offset 601063 - Insert, Feather 2° Left Offset

Pro Class Jig

1351 — Straight Clamp

1352 - Right Clamp

1353 — Left Clamp

601020 - 1" (25cm) Vane Fletching Clamp - Griffin Vane

601004 - Crossbow Receiver / Adapter

Tower® Jigs

601011 - Center Post for .246 (6.25 cm) ID (Standard size)

601012 - Center Post for Pin Adapter

601013 — Center Post for .167" (5.50 cm) ID (F Nock size)

601014 - Center Post for .204" (5.18 cm)ID (A Nock size)

601015 - Center Post for Crossbow Bolts

601016 — Center Post for Swedged-end Arrows

601030 - Center Post for .231" (5.87 cm) ID (H.E. Nock size)

1200 - Arms, 1° Right Offset (red), set of 3

1201 - Arms, Straight (gray), set of 3

1202 - Arms, 3° Helical (black), set of 3

601007 — Arms, Impulse Straight (yellow), set of 3

601024 - Arms, Mylar Straight (gray w/ red clip), set of 3

601037 - Arms, 1° Left Offset (orange), set of 3

601038 - Arms, 3° Left Helical (purple), set of 3

601008L - Arms, Feather Left Wing (green), set of 3

601008R - Arms, Feather Right Wing (blue), set of 3

80211 — Tower Spacers, set of 3

601017 — Pressure Ring, Small (red)

601018 — Pressure Ring, Large (lime) 601036 — Pressure Ring, X-Large (orange)

1319 — Clamp Release Tape, 3 pieces

13192 — Clamp Release Tape, Bulk Pack (21 Pieces)

Cauldron Jig

601026 — Adjustable Compression Ring

QUIVERS

Bruin Quiver

201031 — Retainer Set

201032 — Tree Hanging Loop

1073 - Lever Lock

Pocket Quiver

201036BK - Body 201037BK - Clip

201038 - Retainer Cap

Lynx® Quiver

1045 — Retainer Set for

small 166" (4.22 cm) and .204" (5.18 cm)

arrows

10382 - Retainer Set for standard-size

arrows

STRIPPER TOOLS

15240 — The Stripper Blades, 3 pk


801026 - The Strip-Pro Blades, 3 pk

SHOOTER STOOL

701057 - Arrow tubes with clips



Bohning has supported archers and bow shops for over 75 years. We would like to thank all of you for supporting us since 1946. Innovation, reliability, and customer service are our core principles. We look forward to serving you for the next 75 years!

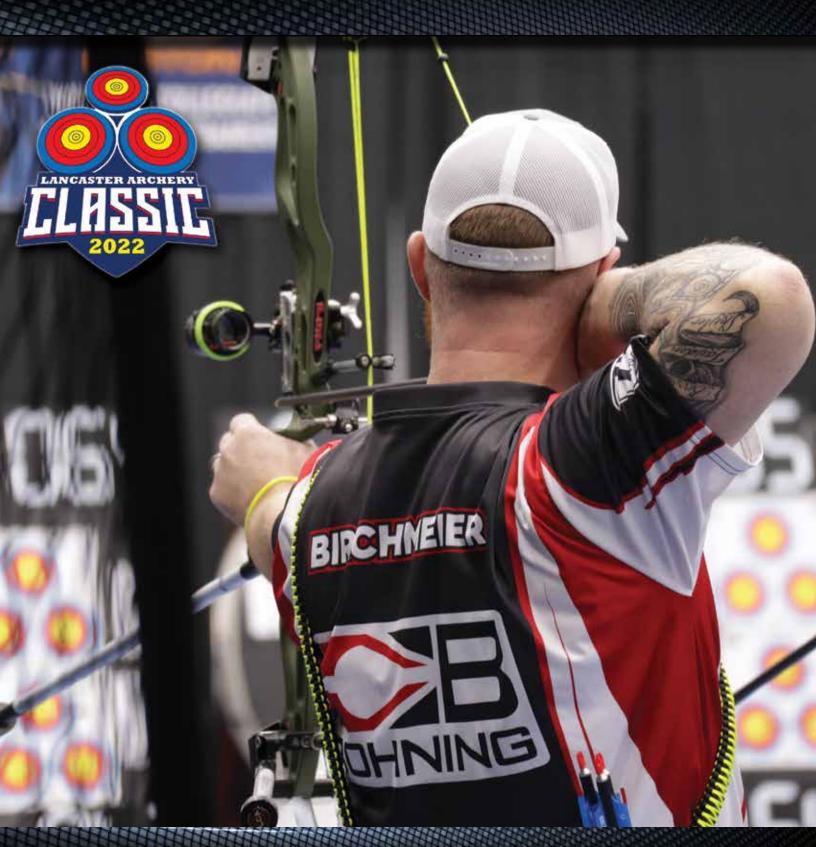

BOHNING - 7361 N 7 Mile Rd., Lake City MI 49651 USA 231.229.4247 | 800-253-0136 | www.bohning.com