
BOHNING

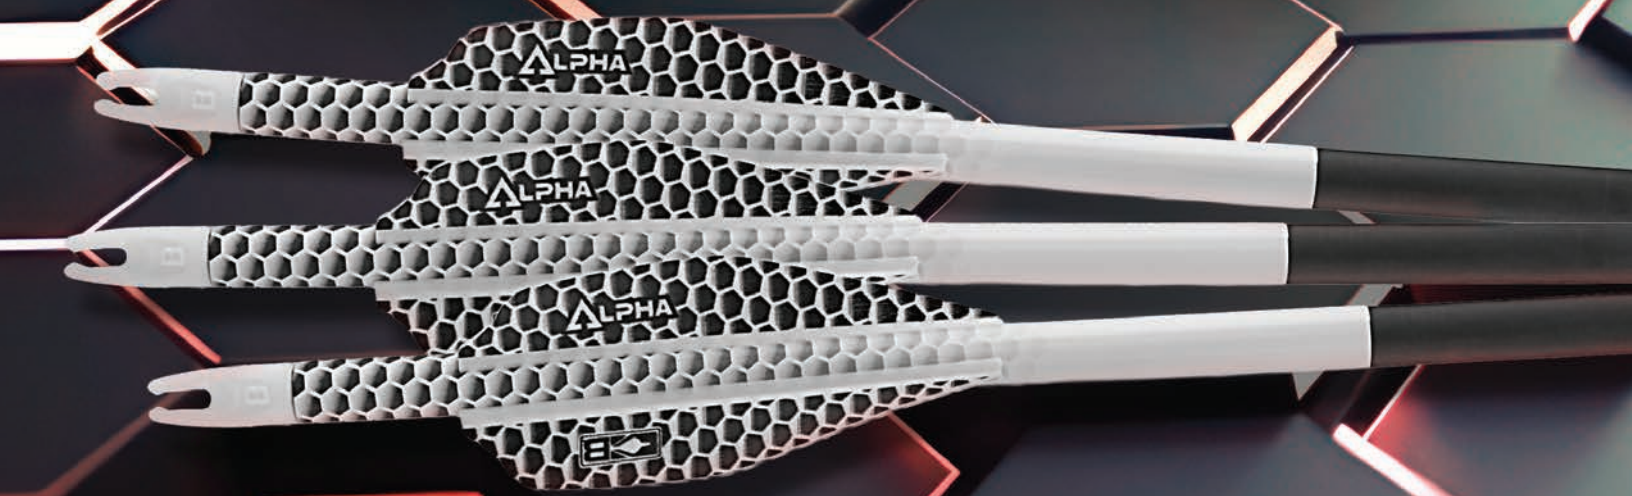

2027

DID YOU KNOW?

At Bohning, our commitment to producing high-quality products and providing exceptional customer service extends well beyond archery. It's the standard we bring to every industry we serve. Learn more about our advancements in these industries by scanning the QR codes located on this page.

park & trail pet co.

Website QR Code

New pet products to keep your four-legged friends moving and ready for their next adventure. Our paw and nose balm is made from natural ingredients, non-toxic, and good for daily use.

www.parkandtrailpet.com



BOHNING AG

Website QR Code

Bohning AG develops, engineers, and produces innovative products for the agricultural industry. The Bohning Block is a revolutionary hoof block. Durable, with no heating necessary to install, this block stays put, reducing the need for reapplication.

www.bohningag.com





BOHNING GOLF PRODUCTS

Website QR Code

Bohning Golf Products takes pride in producing a wide variety of Ferrules for both Irons and Metalwoods. Bohning has served the golf industry for over 30 years. Golf Ferrules not only provide a decorative element to a golf club, they also provide a smooth transition from the shaft to the hosel, covering any rough edges.

www.bohninggolf.com

BOHNING USA FISHING SUPPLY

Website QR Code

BOHNING USA FISHING SUPPLY sells fishing products, paints, adhesives, waxes, and more. Contact us today to learn more.

www.usafishingsupply.com





BOHNING Creative PRODUCTS

Website QR Code

Custom plastic coins, keychains, wing pins, magnets, decals, and more. 100% made in the USA using the latest UV printing technology to ensure vibrant colors and durable designs. Provide your own artwork or let our team design something for you.

www.bohningcreative.com


BOHNING PRECISION PRODUCTS

TOOLING AND MACHINING DIVISION

Website QR Code

Bohning Precision Products can get your machining or tooling projects off the ground and in your hands quickly and efficiently. 50+years of experience in machining and molding. We will get your project done. Don't send your tooling needs out of the country.

www.bohningprecisionproducts.com

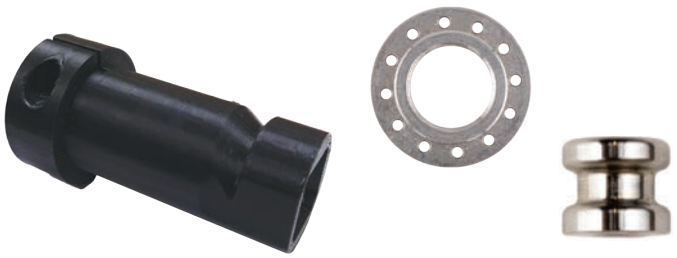

OVER 80 YEARS OF ARCHERY INNOVATION

BOHNING®



PRODUCING HIGH-QUALITY ARCHERY ACCESSORIES FOR MORE THAN 80 YEARS!

TO ORDER:

WEBSITE: www.bohning.com
PHONE: 231-229-4247
TOLL FREE: 800-253-0136
EMAIL: info@bohning.com
FAX: 231-229-4615

ADDRESS:
Bohning
7361 N. 7 Mile Rd.
Lake City, MI 49651
USA

CONTENTS

FLETCHING JIGS ---------- 1
WAXES ---------- 4
ADHESIVES ---------- 5
NOCKS ---------- 7
PREMIUM POINTS ---------- 9
ARROW WRAPS ---------- 12
CUSTOM PRODUCTS ---------- 15
VANES ---------- 17
CROSSBOW PRODUCTS ---------- 26
COVERTECH ---------- 29
DISPLAYS ---------- 30
YOUTH ARCHERY ---------- 31
ACCESSORIES ---------- 33
STRING ACCESSORIES ---------- 35
TRADITIONAL ARCHERY ---------- 36
QUIVERS ---------- 39
BOW CASES ---------- 41
TOOLS ---------- 42
APPAREL ---------- 43
TECHNICAL GUIDE ---------- 45
REPLACEMENT PARTS ---------- 57

TECHNICAL GUIDE

IN-DEPTH INFORMATION ON HOW TO CHOOSE VANES, ADHESIVES, NOCKS, POINTS, JIGS, WAXES, LUBES, AND WRAPS

For your convenience, the **2027 Bohning Technical Guide** can be located at the end of this catalog! Inside, you will find an abundance of technical information regarding vanes, adhesives, nocks, points, fletching jigs, waxes, lubes, arrow wraps, product use cases, general tips, and good general practices relating to archery.

See page 45 for the 2027 Bohning Technical Guide, or scan this QR code for a digital version located on our website.

NEW



ASYMMETRICAL PIN NOCK

FOR RECURVE AND TRADITIONAL FINGER SHOOTERS

AVAILABLE IN 17 COLORS

See page 7

401041 - 12 pack
401042 - 100 pack
401043 - 1000 pack



WIND CHECK

NEW FORMULA AND PACKAGING

WIND CHECK
16122 - 0.21 oz

See page 33

SPIN FLETCHER 2.0™

NEW AND IMPROVED SPIN FLETCHER DESIGN

FAST AND ACCURATE MYLAR VANE FLETCHING AND REPAIR



LEFT-HANDED VANE VERSION NOW AVAILABLE!

COMPACT DESIGN ALLOWS FOR EASY STORAGE IN YOUR RANGE BAG

601070 - Spin Fletcher Right-handed
601070LEFT - Spin Fletcher Left-handed

See page 2

NEW

ARROW WRAPS

- Create a consistent fletching surface with no additional arrow preparation needed. Simply apply your arrow wrap and then fletch!
- Durable material providing a strong adhesion base
- Available in a variety of vibrant colors and unique patterns to customize your arrows

Need a custom design? Contact us with your artwork, or let our team create something for you!

INFO@BOHNING.COM
231-229-4247

See page 13 and 14 or visit us online for more patterns:





PRISM WRAPS
premium vinyl • unique colors

Color-shifting Technology. Changes color depending on perspective!

HEX WRAPS
Matching Hex vanes also released. See page 18



FLETCHING JIGS

PRECISION FLETCHING, SIMPLIFIED

Bohning fletching jigs are built for accuracy, speed, and simplicity. From quick three-vane systems to single-vane precision setups, our jigs make it easy to customize arrows for consistent flight and top performance. Durable, dependable, and trusted by archers worldwide.

PRO TIP: Excess glue buildup can be cleaned with acetone. Place jig arm inserts in a jar of acetone for **two minutes** then remove and wipe off using a small brush. **Do not leave in acetone for extended periods of time.**

CAULDRON®

ADVANCED 3-VANE FLETCHING SYSTEM

3 FLETCH VANES

XBOW

CROSSBOW COMPATIBLE
(WITH CROSSBOW MODEL ONLY)

*SEE CLAMPS INCLUDED CHART



MADE IN USA

(Patented compression ring)

FEATURES:

- Fletches 3 vanes at once using Bohning's award-winning clamp style inserts
- Easy to switch inserts for different fletching configurations (no tools needed)
- Fletches any arrow diameter from .166" to .422" (10.6/64 to 27/64) with nock on
- Can fletch 3° Right or Left (up to 3"); 1° Right or Left (up to 5"); Straight (up to 5"); and 1.5° Right (NASP®)
- Easy to clean with acetone

***CLAMPS INCLUDED:**

	Straight	1° Left	1° Right	1.5° Right	3° Left	3° Right
Cauldron	√	√	√	√	√	√
Crossbow		√	√		√	√
Helix					√	√
Youth	√			√		

THIS JIG WILL:

3 Fletch (120°/120°/120°)

Replacement parts: page 57

601025 - Cauldron Complete
601025XB - Crossbow Edition ONLY ACCEPTS CROSSBOW NOCKS
601025HELIX - 3 Degree Right and Left Only
601025YOUTH - Straight and 1.5 Degree Right

PRO TIP: **Remember that all Bohning vanes are primed twice in the manufacturing process!** You will never have to use a primer pen or clean the bases of any of Bohning vanes before fletching.

Need help choosing the right fletching jig? See page 54

FRONTIER®

PORTABLE & ACCURATE 3 OR 4 FLETCH

3 FLETCH · 4 FLETCH · VANES · XBOW

CROSSBOW COMPATIBLE
(WITH CROSSBOW & COMPLETE MODELS)
*SEE CLAMPS INCLUDED CHART



MADE IN USA



FOLDS FLAT

FEATURES:

- Incorporates Bohning's clamp style inserts
- Fletch any diameter arrow or crossbow bolt
- Easy to use
- Easy to clean with acetone
- Great for your bench, hunting camp, club, or pack
- Fletches with nock on for perfect indexing
- Small package size: 4"(10 cm) x 3"(8 cm) x 9"(22 cm)
- Easy retail display

*CLAMPS INCLUDED:

	Straight	1° Left	1° Right	1.5° Right	3° Left	3° Right
Complete	√	√	√	√	√	√
Crossbow			√			
Frontier					√	√
Youth	√			√		

THIS JIG WILL:
3 Fletch (120°/120°/120°)
4 Fletch Standard (90°/90°/90°/90)

Replacement parts: page 57

1346COMPLETE – Frontier Complete
(includes crossbow receiver adapter)
1346XB – Crossbow Edition
1346 – Frontier
1346YOUTH – Straight and 1.5 Degree Right

SPIN FLETCHER 2.0™

FAST MYLAR® FLETCHING & REPAIR

MYLAR® · 3 FLETCH

NEW MODEL REVISION!

MADE IN USA



The Bohning Spin Fletcher is the ultimate solution for fast and easy re-fletching of Mylar® vanes up to 70mm (2.75") in length. This compact and portable tool is perfect for archers on the go. Available in right or left-hand variations.

FEATURES:

- Fast Mylar® fletching and repair
- Compact design
- Easily fits inside pocket or bow case
- Simply slides over tip of arrow and positions in seconds
- Fletch 1, 2, or 3 Mylar® vanes at a time
- Fletches Mylar® vanes up to 70mm (2.75") in length
- Made in the USA
- Left-handed vane configuration now available
- Great for youth, coaches, parents, and those needing quick and accurate mylar style vane replacement

* Designed by Danio Campanelli

601070 – Spin Fletcher Right-handed
601070LEFT – Spin Fletcher Left-handed

PRO CLASS JIG™

SIMPLE AND EFFICIENT

3 FLETCH | 4 FLETCH | VANES | FEATHER | XBOW

CROSSBOW COMPATIBLE
(WITH ADDED CROSSBOW BOLT RECEIVER ADAPTER)

MADE IN USA



FEATURES:

- Capable of 3 or 4 fletch
- Fits all shaft sizes
- Adjustable offset on vanes or feathers up to 5.5" (140mm) long
- Fletches from 2° left to 2° right
- Fletches feathers and vanes
- Made in the USA

THIS JIG WILL:
3 Fletch (120°/120°/120°)
4 Fletch Standard (90°/90°/90°/90)

Replacement parts: page 57

1347 - Pro Class Complete
Includes Straight, Right, and Left Clamps

601004 — Crossbow Bolt Receiver-Adapter

TOWER®

THE ORIGINAL 3 VANE AT ONCE JIG

3 FLETCH | VANES | FEATHER | MYLAR®

(ON RESPECTIVE MODELS)

XBOW

CROSSBOW COMPATIBLE
(WITH COMPLETE, TRIPLE, HELIX MODELS)

*SEE CLAMPS INCLUDED CHART

MADE IN USA



FEATURES:

- Capable of fletching 1° to 3° right, 1° to 3° left, or straight
- Fletch all 3 vanes at once with precise 120° spacing
- Applies even pressure along the entire vane base
- Great for single or multiple vane repairs too!
- Made in the USA

***CLAMPS INCLUDED:**

	Straight	1° Left	1° Right	3° Left	3° Right	2° Left Feather	2° Right Feather	Mylar Straight
Complete	√	√	√	√	√	√	√	√
Triple	√		√		√			
Helix				√	√			
Feather						√	√	
Mylar								√

601027 - Complete Tower
12963 - Triple Tower
12962 - Helix Tower
601010 - Feather Tower
601035 - Mylar Tower

THIS JIG WILL:
3 Fletch (120°/120°/120°)

Replacement parts: page 57

PROTECT YOUR STRINGS AND YOUR BOW

Waxes for strings, slides, wheels, rollers, buttons, and more

WAXES

TEX-TITE®

THE ORIGINAL



Available with box applicator

- The original bowstring wax
- Silky smooth feel
- Waterproof
- Industry standard for over 70 years
- Box container made from 100% recycled plastic

1306 – 0.92 oz tube (28 g)
1306BOX – 1 box 1.41 oz (40 g)

1630 – 24 tubes
1630BOWL – Bowl + 24 pack
32001 – 250 tubes
3200 – 500 tubes

1630BOX – 24 boxes
32001BOX – 250 boxes
3200BOX – 500 boxes

SEAL-TITE®

MODERN FORMULATION



Available with box applicator

- Silicone-based bowstring wax
- More "grippy" texture for a tactile feel
- Odorless and waterproof
- Box container made from 100% recycled plastic
- Usable on press-fit and pin nocks for easier installation and point and broadhead threads to prevent loosening and rust
- Vegan

1360 – 0.92 oz tube (28 g)
1360BOX – 1 box 1.41 oz (40 g)

1631 – 24 tubes
1631BOWL – Bowl + 24 pack
35001 – 250 tubes
3500 – 500 tubes

1631BOX – 24 boxes
35001BOX – 250 boxes
3500BOX – 500 boxes

XCCELERATOR WAX®

STRING CONDITIONER



- Softens at a low temperature
- Odorless and waterproof
- Fast saturation
- Reduces friction from slides, wheels, and rollers
- Vegan

1365 – 0.51 oz tube (14.5 g)

1634 – 16 tubes
1634BOWL – Bowl + 16 pack
1365-250 – 250 tubes

HERITAGE NATURAL BOWSTRING WAX®

100% NATURAL



- Bowstring wax made from Beeswax and plant-based ingredients
- 100% natural
- Convenient application with push up tube packaging
- Includes leather application pad
- Waterproof

301029 – 1 tube

301029-24 – 24 tubes
301029BOWL – Bowl + 24 pack

STRING SHIELD®

LIQUID WAX



- Silicone-based liquid wax
- Sponge-top applicator
- Liquid formula penetrates fibers of individual strands on string
- Odorless and waterproof
- Vegan

301019 – 1.18 oz tube (35 ml)

301019-16 – 16 tubes
301019BOWL – Bowl + 16 pack
301019-250 – 250 tubes

ZIP SNAP®

ZIPPER AND SNAP WAX



ZipSnap is used on metal and plastic zippers and snaps to lubricate and prevent seizing. ZipSnap is waterproof, odorless, and will not freeze.

301028 – .39 oz tube (11 g)

301028-24 – 24 tubes
301028BOWL – Bowl + 24 pack
301028-250 – 250 tubes

Need help choosing the right wax? See page 56

ADHESIVES

HUMBLE BEGINNINGS IN 1946

Over 80 years of archery innovation, beginning with Ferr-L-Tite®

ARROW LOCK™

RUBBERIZED INSERT ADHESIVE



- Impact resistant
- Rubberized instant glue
- Begins curing in 90 seconds
- Fully cured in 24 hours
- Designed for points and inserts
- Works on all shaft types
- Not reversible

301069 - .71 oz bottle (21 ml)

INSERT IRON™

SUPER STRONG, NOT REVERSIBLE



- Designed for points and inserts
- 48 hour cure time (72 hours if air is dry)
- Expands while curing for better adhesion
- Best possible adhesion, permanent adhesive
- Works on all shaft types

1317 - 1 oz bottle (29.6 ml)

FLETCH-TITE PLATINUM®

THE ORIGINAL

SERVING ARCHERS FOR 80+ YEARS



- Solvent-based glue designed for vanes, feathers, and swedged nocks
- Works on wood, aluminum, fiberglass, carbon, arrow wraps, and painted shafts
- Clamp time 5 minutes, cure time 24-48 hours
- The archery industry's most flexible and durable glue
- Industry standard for over 75 years
- If you have a pint, quart, or gallon of Platinum that has thickened, try Bohning's Platinum Thinner on page 57
- Strongest bond for AR1000 vane material

1301 - 0.75 oz tube (22.1 ml)

301040 - 40 pack
301030 - 200 pack
301006EQ - 6 pack*
301040EQ - 40 pack*
301030EQ - 200 pack*
1356 - Pint (473.1 ml)
1357 - Quart (946.4 ml)
1358 - Gallon (3.79 L)

*Packed to meet "Expected Quantities" International ocean and air transportation requirements in order to reduce dangerous good fees.

⚠ WARNING: Cancer and Reproductive Harm. www.P65Warnings.ca.gov

BLAZER BOND®

PREMIUM INSTANT ADHESIVE



- Instant glue designed for vanes and swedged nocks
- Works on all shaft types
- Use a very thin bead or several dots spread out for best adhesion
- Clamp time - 20 seconds
- Cure time - 2 hours
- Works well in humid conditions

301016 - 1 oz bottle (29.2 ml)
301015 - 0.5 oz bottle (17.2 ml)

301015-24 - 24 bottles
301015BOWL - Bowl + 24 pack

FLETCH FUSE™

INSTANT ADHESIVE



- Instant glue designed for vanes and swedged nocks
- Works on all shaft types
- Clamp time - 30 seconds
- Cure time - 2 hours
- Budget-friendly

301025 - 0.5 oz bottle (17.2 ml)

301025-24 - 24 bottles
301025BOWL - Bowl + 24 pack

Bohning's recommendations for adhesive applications

ADHESIVES TABLE	VANES	POINTS	INSERTS	OUTSERTS	SWEDGED NOCKS	FEATHERS
Fletch-Tite Platinum®	√				√	√
Blazer Bond®	√				√	
Fletch Fuse®	√				√	
Arrow Lock™		√	√	√	√	
Insert Iron™		√	√	√		
Fletching Tape						√

PRECISION GLUE TIPS

LESS GLUE MESS AND WASTE



- Precisely apply glue to your vanes
- Helps prevent glue from drying out
- Simply cut tip to desired size
- Disposable
- For use with Fletch Fuse® and Blazer Bond®

301017-25 - 25 applicator tips

FERR-L-TITE®
ALUMINUM OR WOOD



- Recommended for use with aluminum and wooden arrows. Not for carbon shafts
- Designed for points and inserts
- Heat-reversible on aluminum shafts - high temperature required
- Melting point of 350° F (176.7° C)
- Industry standard for 80 years
- Bohning's first product!

1309 - 12 gram stick

1339 - 1 lb brick (453.6 g)
1633 - 16 sticks (bulk)
31001 - 250 sticks (bulk)

COOL FLEX™
CARBON OR FIBERGLASS



- Recommended for carbon and fiberglass arrow shafts
- Designed for points, inserts, and bushings
- Fully cured once it reaches room temperature
- Use hot water for adjustment, replacement, or removal
- Melting point of 280° F (137.8° C)

1308 - 12 gram stick

1368 - 1 lb brick (453.6 g)
13081 - 16 sticks (bulk)
13082 - 250 sticks (bulk)

ALCOHOL BURNER
EASY WAX MELTING SYSTEM



- Ideal for installation of hot melt adhesives
- Fill with denatured alcohol (not included)
- Holds 4 oz (118.3 ml)

1315 - Burner
1316 - Replacement wick

PREMIUM FLETCHING TAPE
FEATHERS, MYLAR, AND GRIFFIN VANES



- Designed for feathers and mylar vanes
- Works on all shaft types
- Trusted for over 25 years
- Length: 60' (18.3 m)
- Width: 0.188" (4.8 mm)
- Machine-cut without lubricant. No dead zones in the roll
- One roll fletches approximately 40 arrows with 5" (127 mm) feathers

1649 - 60' Fletching Tape

FLETCHING TAPE APPLICATOR
EASILY APPLY AND STORE FLETCHING TAPE



- Easily apply tape to feathers and mylar vanes
- Keeps tape free of dust and debris with the included case
- Easily replace tape by twisting holder counterclockwise. Turn clockwise to secure
- Includes 1 roll of premium fletching tape

801093 - Fletching Tape Applicator with Case

DISPENSER BOTTLES
FOR USE WITH BULK FLETCH-TITE PLATINUM®



- 2 oz (59.1 ml) bottle for use with Fletch-Tite Platinum®
- Deluxe bottle has a smaller opening for easier and cleaner application

1303 - Regular
1304 - 6 pack (red) replacement nozzles and caps
13031 - Deluxe
13032 - 6 pack deluxe (white) replacement nozzles and caps

ADHESIVES TABLE	POINTS	INSERTS	OUTSERTS	PIN BUSHINGS	FEATHERS	MYLAR VANES
Ferr-L-Tite® Aluminum and Wood	√	√	√			
Cool Flex™ Carbon and Fiberglass	√	√	√	√		
Fletching Tape All Shaft Types					√	√

Learn more about adhesives on page 49

NOCKS

CONSISTENT FIT, FLAWLESS RELEASE

Precision-engineered nocks for reliable and consistent shots

PRO TIP: **Inspect your nock after every shot, looking closely for cracks.** Bohning translucent nocks make it easier to see hairline cracks!

NEW ASYMMETRICAL PIN NOCK


FOR TRADITIONAL FINGER SHOOTERS



- Asymmetrical design benefits finger shooters and traditional archers
- Designed to fit a broad range of pin sizes
- Raised index

- Throat size: .106" (2.69 mm)
- Ear-to-Ear Size: .086" (2.18 mm)
- Avg. Weight: 5.0 grains

401041 - 12 pack
401042 - 100 pack
401043 - 1000 pack

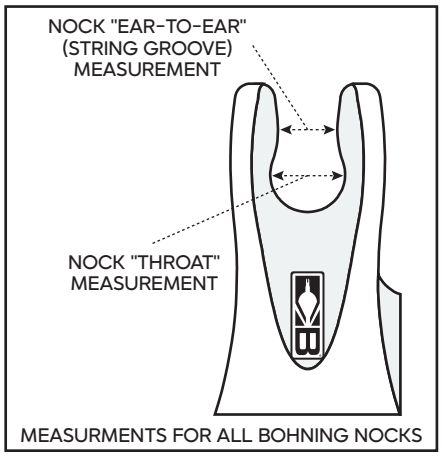

MEASURMENTS FOR ALL BOHNING NOCKS

F NOCK

FITS .166" SHAFTS



- Double-lock throat
- "Micro Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .095" (2.41 mm)
- 6.5 grains

10141 - 12 pack
10142 - 100 pack
10143 - 1000 pack

Fits .166" shafts

A NOCK

FITS .204" SHAFTS



- Double-lock throat
- Raised index
- "Small Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .095" (2.41 mm)
- 7.0 grains

10151 - 12 pack
10152 - 100 pack
10153 - 1000 pack

Fits .204" shafts

H.E. NOCK

FITS .231" SHAFTS



- Double-lock throat
- Recessed index
- "Reduced Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .087" (2.21 mm)
- 8.0 grains

401023 - 12 pack
401024 - 100 pack
401025 - 1000 pack

Fits .231" shafts

SIGNATURE NOCK

FITS .246" SHAFTS



- Smooth throat
- Raised index
- "Standard Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .084" (2.13 mm)
- 12.0 grains

1006 - 12 pack
1008 - 100 pack
1009 - 1000 pack

Fits .246" shafts (standard carbon size)

SMOOTH RELEASE INSERT NOCK

FITS .246" SHAFTS



- Single-lock throat
- Raised index
- "Standard Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .100" (2.54 mm)
- 7.0 grains

401033 - 12 pack
401034 - 100 pack
401035 - 1000 pack

Fits .246" shafts (standard carbon size)

BLAZER NOCK

FITS .246" SHAFTS



- Double-lock throat
- Raised index
- "Standard Diameter"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .096" (2.44 mm)
- 9.0 grains

1003 - 12 pack
1004 - 100 pack
1005 - 1000 pack

Fits .246" shafts (standard carbon size)

F, A, H.E., SIGNATURE, INSERT, AND PIN NOCKS AVAILABLE IN 17 COLORS:

TRANSLUCENT										SOLID						
CL Clear	RU Ruby	TG Tangerine	AP Apricot	LM Lime	KW Kiwi	TL Teal	EB Electric Blue	PU Purple	RS Rose Pink	RD Red	NO Neon Orange	NY Neon Yellow	NG Neon Green	SB Satin Blue	BK Black	WH White

BLAZER PIN NOCKS



Small Throat

- Raised index
- Fits most recurve strings
- Marked with the letter "R"

- Throat Size: .106" (2.69 mm)
- Ear-to-Ear Size: .085" (2.16 mm)
- 5.0 grains

10161 - 12 pack
10162 - 100 pack
10163 - 1000 pack



Standard Throat

- Raised index
- Fits most compound bow strings
- Marked with the letter "V"

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .095" (2.41 mm)
- 5.0 grains

10071 - 12 pack
10072 - 100 pack
10073 - 1000 pack

BLAZER AND SMOOTH RELEASE PIN NOCKS AVAILABLE IN:
17 SOLID AND TRANSLUCENT COLORS
SEE PREVIOUS PAGE

SMOOTH RELEASE PIN NOCK



- Smooth throat and short ears
- Fits most compound bow strings
- Marked with the letter "M"
- Redesigned to fit broader range of pin sizes
- Raised index

- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .100" (2.54 mm)
- 5.0 grains

401030 - 12 pack
401031 - 100 pack
401032 - 1000 pack

CLASSIC NOCK

FOR SWEDGED END ARROWS



- Glue-on nock for swedged end aluminum, wood, and fiberglass shafts
- Index and alignment feature
- Throat Size: .120" (3.05 mm)
- Ear-to-Ear Size: .100" (2.54 mm)

AVAILABLE SIZES:

- 5/16" (7.94 mm)
  Avg. Weight: 10.0 grains
- 11/32" (8.73 mm)
  Avg. Weight: 13.0 grains

10131 - 12 pack
10132 - 100 pack
10133 - 1000 pack

TRANSLUCENT

AP	RS	EB	LM
Apricot	Rose Pink	Electric Blue	Lime

SOLID

NG	RD	OR	BK	PL
Neon Green	Red	Orange	Black	Pearl

YE	NB	PU	BR	WH
Yellow	Navy Blue	Purple	Brown	White

More colors available. Contact us for special orders.

T NOCK

FOR SWEDGED END ARROWS



- Glue-on nock for swedged end aluminum, wood, and fiberglass shafts

1054T - 12 pack
1055T - 100 pack
1056T - 1000 pack

AVAILABLE SIZES:

- 1/4" T Nock (6.35 mm)
  Throat Size: .105" (2.67 mm)
  Ear-to-Ear Size: .082" (2.08 mm)
  Avg. Weight: 6.0 grains
- 9/32" T Nock (7.14 mm)
  Throat Size: .105 (2.67 mm)
  Ear-to-Ear Size: .082" (2.08 mm)
  Avg. Weight: 8.0 grains
- 5/16" T Nock (7.94 mm)
  Throat Size: .115" (2.92 mm)
  Ear-to-Ear Size: .082" (2.08 mm)
  Avg. Weight: 14.0 grains
- 11/32" T Nock (8.73 mm)
  Throat Size: .115" (2.92 mm)
  Ear-to-Ear Size: .082" (2.08 mm)
  Avg. Weight: 15.0 grains

TRANSLUCENT

AP	LM	RS
Apricot	Lime	Rose Pink

SOLID

YE	WH
Yellow	White

More colors available. Contact us for special orders.

LEGEND NOCK

FOR SWEDGED END ARROWS



- Glue-on nock for swedged end aluminum, wood, and fiberglass shafts

AVAILABLE SIZES:

- 9/32" Legend Nock (7.14 mm)
  Throat Size: .120" (3.05 mm)
  Ear-to-Ear Size: .108" (2.74 mm)
  Avg. Weight: 8.0 grains
- 5/16" Legend Nock (7.94 mm)
  Throat Size: .120" (3.05 mm)
  Ear-to-Ear Size: .108" (2.74 mm)
  Avg. Weight: 11.0 grains

1057 - 12 pack
1058 - 100 pack
1059 - 1000 pack

TRANSLUCENT NEW

TG	LM
Tangerine	Lime

SOLID

WH
White

More colors available. Contact us for special orders.

CROSSBOW NOCK

FITS STANDARD .300" CROSSBOW BOLTS



- .300" Half Moon Nock (7.70 mm)
- 11.0 grains

401008 - 12 pack
401009 - 100 pack
401010 - 1000 pack

SOLID

RD	NO	NY	NG	BK	WH
Red	Neon Orange	Neon Yellow	Neon Green	Black	White

See page 50 for more information regarding choosing nocks

Shaft Nominal I.D.	0.166"	0.204"	0.231"	0.246"
Industry Name:	"Micro"	"Small"	"Reduced"	"Standard"
Bohning Nocks	**F Nock**	**A Nock**	**H.E. Nock**	**Blazer Nock Signature Nock Smooth Release Nock**
Size Family:	"4 mm"	"5 mm"	"6 mm"	"6.5 mm"

PREMIUM POINTS

GLUE-IN

AVAILABLE IN 12 PACKS

Outfit your premium bow set-up with Bohning's Premium Points! Each Premium Point is machined to the precise standards you've come to expect from Bohning. They're guaranteed to weigh within 0.25 grains of the specified weight and to be concentric (round) within 0.001" (.025mm). Premium Points are made from stainless steel for a durable rust-free finish. The end result is a stable arrow that spins true and flies clean with every shot.



Bohning manufactures Glue-in Pin Points to fit a wide variety of large diameter aluminum and carbon arrows.

PRO TIP:

To install Glue-in points use Ferr-L-Tite® for aluminum arrows, Ferr-L-Tite® Cool Flex for carbon or carbon hybrid arrows, or Arrow Lock™ for a rubberized instant adhesive.

BREAK-OFF

AVAILABLE IN 12 PACKS

Designed with multiple break-off sections, they allow for easy weight customization to fine-tune arrow flight. Made from high-quality stainless steel, these points ensure consistent impact, optimal balance, and reliable penetration. Perfect for both target and field archery.



GLUE-IN PREMIUM POINTS

SIZE	WEIGHT GRAIN (GRAM)	ARROW MFG	PART #
PS23	100 gn (6.5 g)	Black Eagle®	851036
	150 gn (9.7 g)		851037
	180 gn (11.7 g)		851038
PS26	100 gn (6.5 g)	Black Eagle®	8510100
	120 gn (7.8g)		8510101
	150 gn (9.7 g)		8510102
	180 gn (11.7 g)		8510103
PS27	120 gn (7.8 g)	Black Eagle®	851039
	180 gn (11.7 g)		851040
	210 gn (13.6 g)		851041
	250 gn (16.2 g)		851042
Tank 23D/ X Buster (350 - 500 Spine)	100 gn (6.5 g)	Carbon Express®	851030
	120 gn (7.8g)		851031
	150 gn (9.7 g)		851032
	180 gn (11.7 g)		851075
X Buster (600 - 700 Spine)	120 gn (7.8 g)	Carbon Express®	851063
	150 gn (9.7 g)		851064
	180 gn (11.7 g)		851065
Line Jammer-Pro	100 gn (6.5 g)	Carbon Express®	851047
	120 gn (7.8 g)		851048
	150 gn (9.7 g)		851049
X23 2312	150 gn (9.7 g)	Easton®	851001
	180 gn (11.7mg)		8510112
	200 gn (13.0 g)		851002
X23 2314	150 gn (9.7 g)	Easton®	851003
	180 gn (11.7mg)		8510113
	200 gn (13.0 g)		851004
X23 2315	150 gn (9.7 g)	Easton®	851005
	180 gn (11.7mg)		8510114
	200 gn (13.0 g)		851006
X23 2318	150 gn (9.7 g)	Easton®	851028
	180 gn (11.7mg)		8510115
	200 gn (13.0 g)		851029
	250 gn (16.2 g)		8510121
X27 2712	200 gn (13.0 g)	Easton®	851007
	300 gn (19.4 g)		851008
FatBoy	100 gn (6.5 mg)	Easton®	851094
	150 gn (9.7 mg)		851095
	180 gn (11.7mg)		851096
SuperDrive 23	100 gn (6.5 g)	Easton®	851033
	120 gn (7.8 g)		851034
	150 gn (9.7 g)		851035
SuperDrive 25	100 gn (6.5g)	Easton®	851050
	150 gn (9.7 g)		851051
	180 gn (11.7 g)		851052
SuperDrive 27	150 gn (9.7 g)	Easton®	851066
	180 gn (11.7 g)		851067

GLUE-IN PREMIUM POINTS

SIZE	WEIGHT GRAIN (GRAM)	ARROW MFG	PART #
Gold Tip Series 22	100 gn (6.5 g)	Gold Tip®	8510104
	120 gn (7.8g)		851097
	150 gn (9.7 g)		851098
	180 gn (11.7 g)		851099
X-Cutter	100 gn (6.5 g)	Gold Tip®	851056
	120 gn (7.8 g)		851057
Nine.3 Max	100 gn (6.5 g)	Gold Tip®	851053
	120 gn (7.8 g)		851054
	150 gn (9.7 g)		851055
	180 gn (11.7 g)		8510119
	200 gn (13.0 g)		8510120
Triple X	120 gn (7.8 g)	Gold Tip®	851072
	180 gn (11.7 g)		851073
	210 gn (13.6 g)		851074
	250 gn (16.2 g)		8510122
	300 gn (19.4 g)		8510123
V-TAC 23 NVX 23	100 gn (6.5 g)	Victory®	851060
	150 gn (9.7 g)		851061
	180 gn (11.7 g)		851062
	200 gn (13.0 g)		8510118
V-TAC 25 NVX25	100 gn (6.5 g)	Victory®	851056
	120 gn (7.8 g)		851057
V-TAC 27	120 gn (7.8 g)	Victory®	8510126
	180 gn (11.7 g)		8510127
	210 gn (13.6 g)		8510128
	250 gn (16.2 g)		8510129
NVX 25 HV	100 gn (6.5 g)	Victory®	851058
	120 gn (7.8 g)		851059
VX-27 NVX27	120 gn (7.8 g)	Victory®	851043
	180 gn (11.7 g)		851044
	210 gn (13.6 g)		851045
	250 gn (16.2 g)		851046

BREAK-OFF PREMIUM POINTS

SIZE	WEIGHT GRAIN (GRAM)	ARROW MFG	PART #
0.166" 4.22 MM TYPE I	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS UP TO 0.218" (5.54MM)	851025
0.166" 4.22 MM TYPE II	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS 0.219"- 0.228" (5.56 - 5.79MM)	851026
0.166" 4.22 MM TYPE III	100-110-120 GN (6.5 - 7.2 - 7.8 G)	FOR SHAFTS 0.229" (5.82MM) AND UP	851027

PREMIUM POINTS

SCREW-IN


AVAILABLE IN 6, 12, 120, AND 1,200 PACKS
(SPECIFY PACK SIZE WHEN ORDERING)

BULLET & CONCAVE



Bohning manufactures over 28 premium Screw-in points to fit a wide array of aluminum and carbon arrow and crossbow bolt dimensions. Made of match grade anti-rust stainless steel, our points are manufactured to precise standards and guaranteed within .25 grains in weight and .001" (.025mm)* concentricity (concentricity is the measure of how precisely centered the tip of the point is). Superior concentricity creates a point, and in turn an arrow, that spins and flies true. Choose from either a bullet or concave point style and 85, 100, 125, 150, 175, 200, 250, or 300 grain weights to accommodate any shooting setup. We also produce a selection of premium points with O-rings included for increased point security. Don't let a cheap point hold back your arrow's performance; choose industry-leading Premium Points from Bohning.

*Screw-in points 150 gn and up are guaranteed within .002" concentricity



SCREW-IN PREMIUM POINTS				
SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	BULLET PART #	CONCAVE PART #
17/64"	85 gn (5.5 g)	0.266" (6.75 mm)	851009	851091
	100 gn (6.5 g)		851010	851092
	125 gn (8.1 g)		851011	851093
9/32"	85 gn (5.5 g)	0.281" (7.14 mm)	851012	851076
	100 gn (6.5 g)		851013	851077
	125 gn (8.1 g)		851014	851078
	175 gn (11.3 g)		8510125	Made to Order
	150 gn (9.7 g)		8510108	Made to Order
19/64"	85 gn (5.5 g)	0.297" (7.54 mm)	851015	851079
	100 gn (6.5 g)		851016	851080
	125 gn (8.1 g)		851017	851081
5/16"	85 gn (5.5 g)	0.313" (7.94 mm)	851018	851082
	100 gn (6.5g)		851019	851083
	125 gn (8.1g)		851020	851084
	150 gn (9.7 g)		8510105	Made to Order
	175 gn (11.3 g)		8510124	Made to Order
	200 gn (13.0 g)		8510109	Made to Order
	250 gn (16.2 g)		8510116	Made to Order
	300 gn (19.4 g)		8510117	Made to Order
21/64"	85 gn (5.5 g)	0.328" (8.33 mm)	Made to Order	851085
	100 gn (6.5 g)		851021	851086
	125 gn (8.1 g)		851022	851087
	150 gn (9.7 g)		8510106	Made to Order
11/32"	85 gn (5.5 g)	0.344" (8.73 mm)	Made to Order	851088
	100 gn (6.5 g)		851023	851089
	125 gn (8.1 g)		851024	851090
	150 gn (9.7 g)		8510107	Made to Order
	200 gn (13.0 g)		8510110	Made to Order

SCREW-IN PREMIUM POINTS WITH O-RINGS				
SIZE	WEIGHT GRAIN (GRAM)	SHAFT O.D.	BULLET PART #	CONCAVE PART #
17/64"	100 gn (6.5 g)	0.266" (6.75 mm)	851010R	Made to Order
9/32"	100 gn (6.5 g)	0.281" (7.14 mm)	851013R	Made to Order
19/64"	100 gn (6.5 g)	0.297" (7.54 mm)	851016R	Made to Order
5/16"	100 gn (6.5 g)	0.313" (7.94 mm)	851019R	Made to Order
	125 gn (8.1 g)		851020R	Made to Order
11/32"	100 gn (6.5 g)	0.344" (8.73 mm)	851023R	Made to Order


Don't see the point you are looking for?
Contact us to discuss a custom point order.

MADE IN USA

CONVERSION CHART		
17/64"	0.266"	6.75 mm
9/32"	0.281"	7.14 mm
19/64"	0.296"	7.54 mm
5/16"	0.313"	7.95 mm
21/64"	0.328"	8.33 mm
11/32"	0.344"	8.74 mm

WHAT SCREW-IN POINT FITS MY ARROW?

PLACE YOUR SHAFT HERE
(start at largest diameter and move right until white dotted line is not visible)

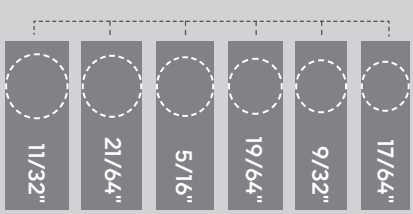



BOHNING ARCHERY PARTNER
*@_BBROWNLEE_*



BOHNING ARCHERY PARTNER
@FENNA.STALLEN.ARCHER



BOHNING ARCHERY PARTNER
@ADRENALINESEEKOUTDOORS

FLETCH PREP – CLEAR ARROW WRAPS



- Provides a clear, clean, and consistent fletching surface
- Works on all types of arrow shafts
- No tools needed. Apply to arrow like a normal arrow wrap
- Fletch Prep Arrow Wraps are NASP® approved (use standard size)
- Made from high-quality vinyl

WIDTH

XS – 0.875" (22mm)	Fits arrow shafts with O.D. up to 14/64" (0.219 mm)
SM – 1.00" (25mm)	Fits arrow shafts with O.D. up to 17/64" (0.226 mm)
STND – 1.125" (29mm)	Fits arrow shafts with O.D. up to 19/64" (0.296 mm)
LG – 1.375" (35mm)	Fits arrow shafts with O.D. up to 24/64" (0.375 mm)
XL – 1.50" (38mm)	Fits arrow shafts with O.D. up to 26/64" (0.406 mm)



30 PACK – 5" WRAP (127 mm)
502091CL – 5" Standard
502092CL – 5" Small
502093CL – 5" XS
502094CL – 5" Large
502095CL – 5" XL

VISI-WRAP






501018BL – Bohning Logo
501018TS – Tiger Stripe

- Find arrows in poor light!
- 3 sets of 12 highly reflective decal wraps
- Fits arrows up to standard diameter: 19/64" / 0.296" (7.54 mm)
- Weighs 1.8 Grains (117 mg)

NUMBER DECALS



501012WA – Number Decals

Need custom decals?
Contact us!



- Great way to number your best arrows
- 16 sets of numbers 1-12
- Weighs 0.5 Grains (32 mg)
- Fits arrows up to standard diameter: 19/64" / 0.296" (7.54 mm)


ARROW WRAPS

IMPROVE ADHESION AND VISIBILITY

Arrow wraps are a useful fletching tool to help improve vane adhesion and eliminate the need for additional arrow shaft preparation work before fletching. Simply apply your arrow wrap and start fletching.

ARROW WRAP SIZING GUIDE

TRUE TO SIZE - PLACE YOUR ARROW SHAFT HERE

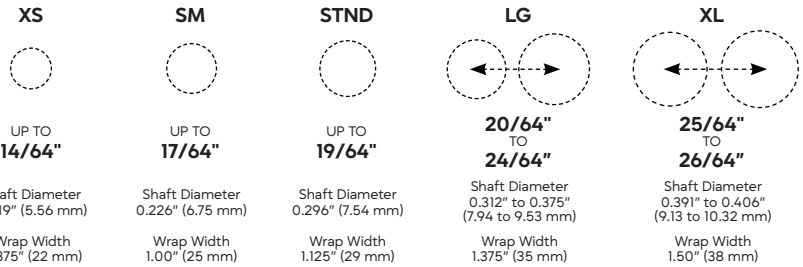

XS	SM	STND	LG	XL
UP TO **14/64"**	UP TO **17/64"**	UP TO **19/64"**	**20/64"** TO **24/64"**	**25/64"** TO **26/64"**
Shaft Diameter 0.219" (5.56 mm)	Shaft Diameter 0.226" (6.75 mm)	Shaft Diameter 0.296" (7.54 mm)	Shaft Diameter 0.312" to 0.375" (7.94 to 9.53 mm)	Shaft Diameter 0.391" to 0.406" (9.13 to 10.32 mm)
Wrap Width 0.875" (22 mm)	Wrap Width 1.00" (25 mm)	Wrap Width 1.125" (29 mm)	Wrap Width 1.375" (35 mm)	Wrap Width 1.50" (38 mm)

Custom ARROW WRAPS AVAILABLE

Contact us today to get started with your custom product order!

AVAILABLE IN 3 LENGTHS AND 5 WIDTHS

All wraps are available in 13 packs or bulk packaging.
Please indicate the wrap color code when ordering.

SOLID AND REFLECTIVE



4" WRAP (101.6 mm)
501031 — 4" Standard
501032 — 4" Small
501033 — 4" XS
501034 — 4" Large
501035 — 4" XL

5.5" WRAP (139.7 mm)
501071 — 5.5" Standard
501072 — 5.5" Small
501073 — 5.5" XS
501074 — 5.5" Large
501075 — 5.5" XL

7" WRAP (177.8 mm)
501051 — 7" Standard
501052 — 7" Small
501053 — 7" XS
501054 — 7" Large
501055 — 7" XL

TIGER STRIPE



4" WRAP (101.6 mm)
501001 — 4" Standard
501002 — 4" Small
501003 — 4" XS
501004 — 4" Large
501005 — 4" XL

5.5" WRAP (139.7 mm)
501061 — 5.5" Standard
501062 — 5.5" Small
501063 — 5.5" XS
501064 — 5.5" Large
501065 — 5.5" XL

7" WRAP (177.8 mm)
501041 — 7" Standard
501042 — 7" Small
501043 — 7" XS
501044 — 7" Large
501045 — 7" XL

PRO TIP: **Arrows are easier to fletch when using arrow wraps. Simply peel off the old arrow wrap for a clean fletching surface. Vanes also stick better to arrow wraps; no additional arrow shaft preparation work required!**

For for information on wraps and their benefits, see page 53

PATTERN WRAPS

TGID Topographical Glow in the Dark
TBKREF Topo Black Reflective
TWHREF Topo White Reflective
TTN Topo Tan
TWH Topo White — TOP SELLER
TNY Topo Neon Yellow — TOP SELLER
TNO Topo Neon Orange — TOP SELLER
TNG Topo Neon Green
THP Topo Hot Pink
TBK Topo Silver Black — NEW
TWBK Topo White Black — NEW
MOBT Mossy Oak Bottomland — TOP SELLER
TNC Tan Camo
ODC Olive Drab Camo
KWH Kryptek® White
KNG Kryptek® Neon Green
KP Kryptek® Pontus
US Stars and Stripes
FR First Responder
LE Law Enforcement
WSPT White Spatter
CYE Crested Wrap Yellow
BLL Blue Lightning
WTH Whitetail Hunter
WHD White Deer
BIRCH Birch Bark

4" WRAP (101.6 mm)
501001 — 4" Standard
501002 — 4" Small
501003 — 4" XS
501004 — 4" Large
501005 — 4" XL

5.5" WRAP (139.7 mm)
501061 — 5.5" Standard
501062 — 5.5" Small
501063 — 5.5" XS
501064 — 5.5" Large
501065 — 5.5" XL

7" WRAP (177.8 mm)
501041 — 7" Standard
501042 — 7" Small
501043 — 7" XS
501044 — 7" Large
501045 — 7" XL

HWH Hex White — NEW
HNY Hex Neon Yellow — NEW
HNO Hex Neon Orange — NEW
HNG Hex Neon Green — NEW
HHP Hex Hot Pink — NEW
BX Blue X-Ray
GX Green X-Ray
YX Yellow X-Ray
OX Orange X-Ray
RX Red X-Ray
WHDT White Don't Tread on Me
NYDT Neon Yellow Don't Tread on Me

CLEAR PATTERN WRAPS

Clear wrap vinyl material with white foil patterns. Arrow shaft color shows through!

TCL Topo Clear — NEW
White topographical pattern on clear vinyl material

WL White Lace
White lace pattern on clear vinyl material

PRISM™ WRAPS

PPG Plasma Green — NEW
TPPG Topo Plasma Green — NEW
BPPG Biohazard Plasma Green — NEW

COLOR SHIFTING*
PAV Aqua Violet — NEW
TPAV Topo Aqua Violet — NEW
PPAV Punk Aqua Violet — NEW
SHIFTS FROM AQUA TO VIOLET

PHR Hunter Reflex — NEW
TPHR Topo Hunter Reflex — NEW
GPHR Gobbler Hunter Reflex — NEW
SHIFTS FROM GREEN TO BROWN

*Aqua Violet and Hunter Reflex wraps color shift depending on view perspective

PRO TIP: Bohning arrow wraps make arrows easier to see in the field and downrange.

MORE PATTERNS AND DESIGNS AVAILABLE ONLINE:


Missing your favorite wraps? Legacy patterns also available online!

CUSTOM ARROW WRAP SIZES AND PATTERNS AVAILABLE. CONTACT US TODAY TO GET STARTED!

Custom Products

ARTWORK CAN BE PROVIDED OR WE CAN CREATE IT FOR YOU!

YOUR BRAND



- Custom vanes are available in all standard colors with a 1,000 vane minimum order quantity
- Custom arrow wraps are available in all colors and patterns. Only a 50 wrap minimum order quantity required!
- Provide your own artwork, have our design team create something for you, or add your logo to our many existing arrow wrap designs

Contact us for more information:
custom@bohning.com 231-229-4247

ON ALL BOHNING PRODUCTS



CUSTOM STICKERS AND DECALS

STYLE 1 (CD1)



STYLE 2 (CD2)



STYLE 5 (CD5)



STYLE 6 (CD6)



STYLE 3 (CD3)



STYLE 4 (CD4)



STYLE 7 (CD7)



STYLE 8 (CD8)



- Custom stickers with your logo or shop name
- Great for give-aways or for sale

CHOOSE YOUR STYLE AND QUANTITY

- 8 styles
- 100 custom stickers
- 300 custom stickers

NEED A CUSTOM DESIGN?

CONTACT US!
231-229-4247

Please email logos for custom vanes, wraps, and decals in a **vector format**, such as **Adobe Illustrator (.ai)** or **Encapsulated Post Script (.eps)** files. You must have permission to use the artwork given to Bohning for custom products. Bohning will not take responsibility for artwork that is copyrighted. Fees and fines could result from using imagery you do not have the proper license for.

We are happy to provide a quote upon request as long as the vane style and quantity, wrap size and quantity, custom artwork, and size are known.

Bohning reserves the right to charge a $36.00 design fee for vane logos or wraps that take an excessive amount of design time. This will never be charged without correspondence with the customer



BOHNING ARCHERY PARTNER
@GRACECAMOANDLACE

Customize

ARROW BOXES
WIND-CHECK
ADHESIVES
WAXES
ARROW LUBE
AND MORE!


- Use 80 years of Bohning innovation to build trust with your customers using custom white label products
- Same great Bohning quality, just with your name on the package
- Bring your own artwork or have our team design it for you
- Low minimum order quantities


Contact us for more information:
custom@bohning.com
231-229-4247


Need arrow boxes for your custom arrow builds?
See more on page 34





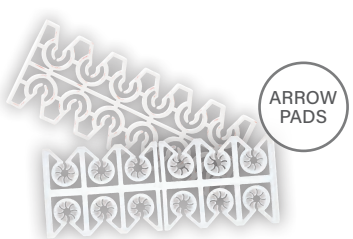

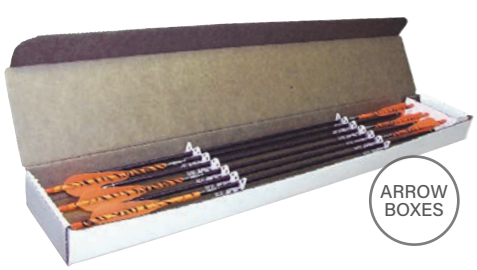

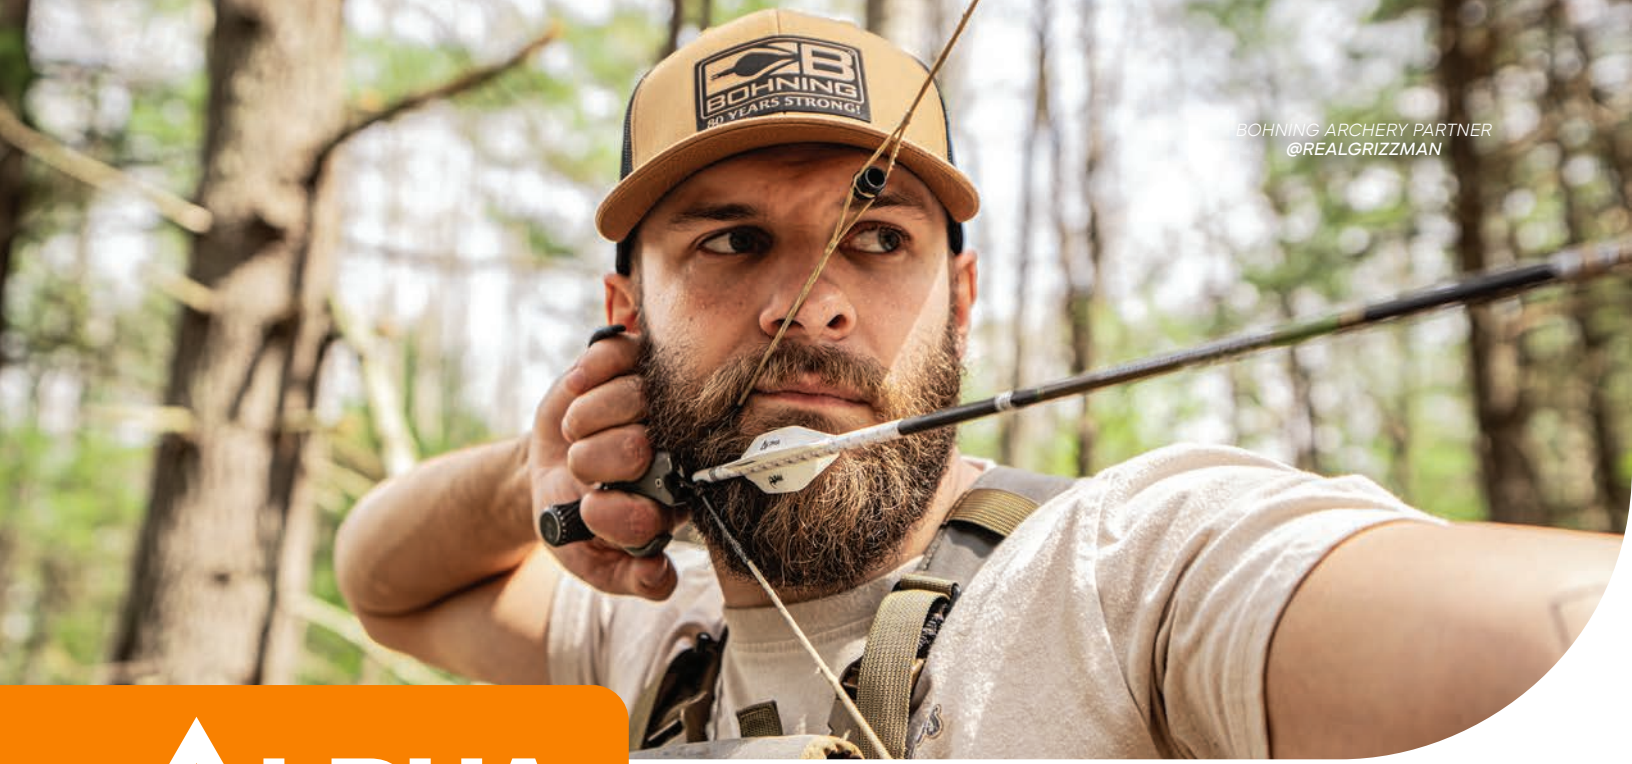

BOHNING ARCHERY PARTNER
@REALGRIZZMAN

ALPHA
AR1250 MATERIAL



HUNTING, 3D, CROSSBOW, TARGET



8.5 GRAINS (551 mg) 8.6 STIFFNESS

101061 - 36 pk
101062 - 100 pk
101063 - 1000 pk

STEALTH + SPEED + TORQUE

Alpha was designed with the modern bowhunter in mind. It steers mechanical or fixed blade broadheads with ease and reduces vane flutter with its low profile and soft shield cut. The highest point of the vane has been moved forward, initiating spin faster and correcting arrow flight sooner.

AR1250 VANE MATERIAL

ULTRA STIFF - QUIET - BEST FOR LONG DISTANCE AND HIGH SPEED

AR1250 is the stiffest material on the market. If you have ever shot HEAT or X3 vanes, Alpha will feel familiar. This stiff material, combined with the unique low profile vane shape, creates a hunting vane that will perform in even the most rugged situations.

NEW TRUE COLOR PATTERNS FOR ALPHA/ATLAS



WH	TBR	TTN	TOD	THP	TNO	TNY	TNG	TSB	HWH	HHP	HNO	HNY	HNG	AF
Topo White	Topo Brown	Topo Tan	Topo Olive Drab Green	Topo Hot Pink	Topo Neon Orange	Topo Neon Yellow	Topo Neon Green	Topo Satin Blue	Hex White	Hex Hot Pink	Hex Neon Orange	Hex Neon Yellow	Hex Neon Green	American Flag

ALPHA/ATLAS VANES AVAILABLE IN 16 SOLID COLORS

NEW



BR	TN	OD	NR	RD	NO	NY	NG	BL	SB	TL	PU	HP	BK	SL	WH
Brown	Tan	Olive Drab Green	Neon Red	Red	Neon Orange	Neon Yellow	Neon Green	Blue	Satin Blue	Teal	Purple	Hot Pink	Black	Silver	White



9.0 GRAINS (583 mg) 6.1 STIFFNESS

101071 - 36 pk
101072 - 100 pk
101073 - 1000 pk

ATLAS
AR1000 MATERIAL

3D

HUNTING, 3D, TARGET

DURABILITY + FORGIVENESS + TORQUE

Atlas shares the same profile as Alpha, but is made from our softer, most durable, vane material. This material maximizes forgiveness while retaining optimal downrange speed. Atlas excels at hunting, as well as target archery.

AR1000 VANE MATERIAL

DURABLE - BEST ADHESION - BEST SELLING VANE MATERIAL EVER

AR1000 is our most durable vane material; made popular with the release of the Blazer vane. This ultra-durable material is easy to fletch, holds up to the toughest hunting conditions, and is less likely to sheer off if struck by a stray arrow during competition. Atlas vanes are NASP® approved and our recommendation for youth archers.

NEW TRUE COLOR PATTERNS
ALPHA AND ATLAS VANES


TWH Topo White


TTN Topo Tan


TBR Topo Brown


TOD Topo Olive Drab


THP Topo Hot Pink


TNY Topo Neon Yellow


TNO Topo Neon Orange


TNG Topo Neon Green


TSB Topo Satin Blue


HWH Hex White


HHP Hex Hot Pink


HNY Hex Neon Yellow


HNO Hex Neon Orange


HNG Hex Neon Green



AF American Flag


ALPHA:
101071 - 36 pk
101072 - 100 pk
101073 - 1000 pk


ATLAS:
101071 - 36 pk
101072 - 100 pk
101073 - 1000 pk


COMBO PACKS
ALPHA AND ATLAS VANES


TN/OD
12 - Tan
24 - Olive Drab


WH/RD
12 - White
24 - Red


WH/NY
12 - White
24 - Yellow


WH/HP
12 - White
24 - Hot Pink


WH/NO
12 - White
24 -Neon Orange


WH/NG
12 - White
24 - Neon Green


WH/AF
12 - White
24 - American Flag

ALPHA
101060 - 36 pk
(12 Index, 24 Color)

ATLAS
101070 - 36 pk
(12 Index, 24 Color)



PRO TIP: **A one degree or greater offset/helical is recommended for Bohning vanes.** Vane offset/helical generates spin and corrects your arrow with every rotation.

For more information regarding vane material, see page 46





Blazer®
AR1000 MATERIAL

HUNTING, 3D, CROSSBOW



6.6 GRAINS (428 mg) 6.0 STIFFNESS

10831 - 36 pk
10832 - 100 pk
10833 - 1000 pk

TRUSTED FOR OVER 20 YEARS

The Blazer vane is easily recognizable around the world by its uniquely short length and tall profile. This combination allows the Blazer Vane to offer superior stabilization without adding excessive drag or weight. The short length reduces surface area and drag, while the tall profile enhances steering and arrow control. This is important when shooting broadheads. *Blazer has been the #1 selling vane in the world since 2005.*

AR1000 VANE MATERIAL

DURABLE - BEST ADHESION - BEST SELLING VANE MATERIAL EVER

AR1000 is the most durable vane material that Bohning offers. This ultra-durable material is easy to fletch, holds up to the toughest hunting conditions, and is less likely to sheer off or deflect if struck by a branch or other foliage during flight.

BLAZER VANES AVAILABLE IN 16 SOLID COLORS

TN	OD	NR	RD	NO	NY	NG	BL	SB	TL	PU	HP	BK	BKO	SL	WH
Tan	Olive Drab Green	Neon Red	Red	Neon Orange	Neon Yellow	Neon Green	Blue	Satin Blue	Teal	Purple	Hot Pink	Black	Blackout	Silver	White

PRO TIP: **All Bohning vanes are pre-primed at the factory. No additional vane prep work needed!**
Blazer Bond, Fletch Fuse, and Fletch-Tite Platinum® adhesives are recommended for Blazer vanes.

For help choosing the correct vane, see page 46

COMBO PACKS

BLAZER VANES



TN/OD
12 - Tan
24 - Olive Drab



WH/RD
12 - White
24 - Red



WH/NY
12 - White
24 - Neon Yellow



WH/HP
12 - White
24 - Hot Pink



WH/NO
12 - White
24 - Neon Orange



WH/NG
12 - White
24 - Neon Green



WH/AF
12 - White
24 - American Flag



101050 - 36 pk
(12 Index, 24 Color)

TRUE COLOR PATTERNS

BLAZER VANES



TWH Topo White



TTN Topo Tan



TOD Topo Olive Drab



TSB Topo Satin Blue



THP Hot Pink



TNY Topo Neon Yellow



TNO Topo Neon Orange



TNG Topo Neon Green



HNO Hex White



HHP Hex Hot Pink



HNO Hex Neon Orange



HNY Hex Neon Yellow



HNG Hex Neon Green



WT White Tiger



RT Red Tiger



YT Yellow Tiger



GT Green Tiger



TT Teal Tiger



OT Orange Tiger



PUT Purple Tiger



PT Pink Tiger



FTS Flying Tiger Shark



NYDT Don't Tread on Me NY



WHDT Don't Tread on Me WH



AM American Made



AF American Flag



WSPT White Spatter



PC Pink Camo

10831 - 36 pk
10832 - 100 pk
10833 - 1000 pk



PRO TIP: **All Bohning vanes are pre-primed at the factory. No additional vane prep work needed!**
Blazer Bond or Fletch Fuse adhesives are recommended for Alpha vanes.

To learn more about vane adhesion, see page 47

TRUEFLETCH

WHY USE THIS PRODUCT?: Blazer® and Black Sky™ TrueFletch are easy to install for emergency purposes in the backcountry or for everyday fletching! Slide TrueFletch over your prepared arrow shaft and submerge in boiling water. Whether it is on your stove at home, over your campfire, or camp stove while hunting, you can have consistent easy to install vanes and wraps on your arrows. TrueFletch also works well with crossbow bolts.

Blazer® **101001** - 6 pk
101003 - 50 pk

BLAZER® TRUEFLETCH

BLACK SKY **101002** - 6 pk

BLACK SKY™ TRUEFLETCH

- Shrinks to Fit shafts 0.219" - 0.375" (5.56 mm - 9.525 mm)
- Store in a cool place until use
- 5" in length (127 mm)
- Average weight (Blazer TrueFletch): 27 grains
- Average weight (Black Sky TrueFletch): 36 grains



APPLY USING BOILING WATER!



AR1000 VANE MATERIAL

Durable - Best Adhesion - Best Selling Vane Material Ever


AR1250 VANE MATERIAL

Ultra Stiff - Quiet - Best for Long Distance and High Speed

PRO TIP: **For a left or right helical, simply rotate clockwise or counterclockwise while submerging in water.** No additional tools or adhesives needed!

BLACK SKY AND HEAT VANES AVAILABLE IN 14 COLORS

NR	RD	NO	NY	NG	BL	SB	TL	PU	HP	BK	SL	WH	AF
Neon Red	Red	Neon Orange	Neon Yellow	Neon Green	Blue	Satin Blue	Teal	Purple	Hot Pink	Black	Silver	White	American Flag

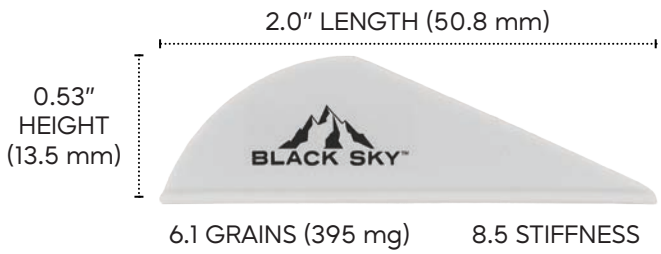

6.1 GRAINS (395 mg) 8.5 STIFFNESS

BLACK SKY™ AR1250 MATERIAL


HUNTING, 3D, CROSSBOW

BLACK SKY –

10901 - 36 pk
10902 - 100 pk
10903 - 1000 pk

OPTIMIZED FOR FIXED BLADE BROADHEADS - ULTRA STIFF - QUIET

The Black Sky 2.0 vane is designed with high-speed bows and crossbows in mind. It has the same legendary profile as the Blazer vane but is manufactured with our ultra-stiff AR1250 material. This combination will give you the unmatched ability to steer an arrow while being more rigid and quieter in flight. Try this vane out in your high-speed compound or crossbow and see for yourself.

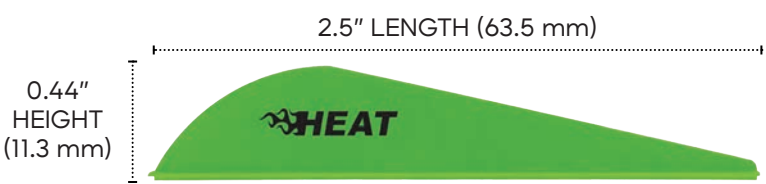

6.2 GRAINS (395 mg) 9.0 STIFFNESS

HEAT AR1250 MATERIAL

HUNTING, 3D

HEAT –

101036 - 36 pk
101037 - 100 pk
101038 - 1000 pk

LOW PROFILE - OPTIMIZED FOR MECHANICAL BROADHEADS - ULTRA STIFF - QUIET

The HEAT vane is designed for bows that require a lower profile vane. It has the same surface area as our Blazer vane but is only 0.44" (11.3 mm) in height. This allows you to shoot this vane out of bows or rests that have lower clearance levels. This vane is perfect, 3-fletched, to steer a mechanical broadhead or 4-fletched with a fixed-blade broadhead. The AR1250 material and low profile make this one of the quietest vanes on the market.

PRO TIP: **All Bohning vanes are pre-primed at the factory. No additional vane preparation work needed!**
Blazer Bond or Fletch Fuse instant adhesives are recommended for Black Sky and HEAT vanes.

X VANE
AR1000 MATERIAL



Available in 5 sizes

VANE	HUNTING	3D	CROSSBOW	INDOOR	FITA/FIELD	RECURVE
3.5 Inch	√		√	√		
3.0 Inch	√	√	√	√		
2.25 Inch	√	√		√	√	
1.75 Inch		√		√	√	√
1.5 Inch		√		√	√	√

LENGTH	HEIGHT	GRAINS	STIFFNESS
3.5 Inch (88.9 mm)	0.49" (12.4 mm)	12.0	5.8
3.0 Inch (76.2 mm)	0.48" (12.1 mm)	9.5	6.1
2.25 Inch (57.2 mm)	0.36" (9.2 mm)	6.0	6.7
1.75 Inch (44.5 mm)	0.40" (10.2 mm)	4.5	6.6
1.5 Inch (38.1 mm)	0.35" (8.9 mm)	3.5	6.8

X VANE – **10771*** – 36 pk
10772* – 100 pk
10773* – 1000 pk *Specify length when ordering

VERSATILE SHIELD CUT – AVAILABLE IN 5 LENGTHS – DURABLE – BEST ADHESION

The 3.5" and 3.0" X Vanes are excellent for hunting, 3D, crossbow, and target archery. The 3.0" X Vane is also a great choice for youth competitions and has become a mainstay at IBO, ASA, and TAC events. The 1.5" and 1.75" and their low profiles are perfect for small diameter arrows, distance competitions, and recurve and traditional bow setups.

X3
AR1250 MATERIAL



Available in 5 sizes

X3	HUNTING	3D	CROSSBOW	INDOOR	FITA/FIELD	RECURVE
3.5 Inch	√		√	√		
3.0 Inch	√	√	√	√		
2.25 Inch	√	√		√	√	
1.75 Inch		√		√	√	√
1.5 Inch		√		√	√	√

LENGTH	HEIGHT	GRAINS	STIFFNESS
3.5 Inch (88.9 mm)	0.49" (12.4 mm)	11.6	8.8
3.0 Inch (76.2 mm)	0.48" (12.1 mm)	8.8	8.6
2.25 Inch (57.2 mm)	0.36" (9.2 mm)	5.5	9.0
1.75 Inch (44.5 mm)	0.40" (10.2 mm)	4.3	9.0
1.5 Inch (38.1 mm)	0.35" (8.9 mm)	3.3	9.3


X3 – **101051*** – 36 pk
101052* – 100 pk
101053* – 1000 pk *Specify length when ordering

VERSATILE SHIELD CUT – AVAILABLE IN 5 LENGTHS – ULTRA STIFF – QUIET

Born out of the need for stiffer material due to high-powered vertical and crossbows, the X3 vane is perfect for hunting, 3D, and crossbow applications. The stiffer material results in less vane flutter and maximized arrow stabilization in flight.

X, X3, ZEN, AIR, AND BRONCO VANES AVAILABLE IN 14 COLORS

NR	RD	NO	NY	NG	BL	SB	TL	PU	HP	BK	SL	WH	AF
Neon Red	Red	Neon Orange	Neon Yellow	Neon Green	Blue	Satin Blue	Teal	Purple	Hot Pink	Black	Silver	White	American Flag

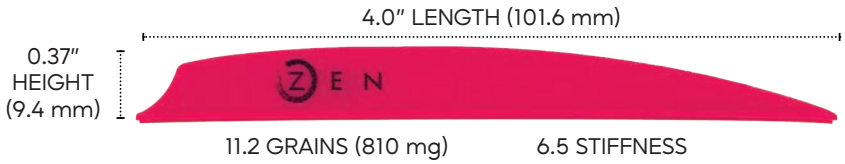

ZEN
AR1000 MATERIAL


ZEN –

101047 - 36 pk
101048 - 100 pk
101049 - 1000 pk

INDOOR

LOW PROFILE - DESIGNED FOR INDOOR TARGET SHOOTING

Designed specifically for indoor target archery, the Zen vane's low profile height (0.37") allows for clearance on tight setups with larger arrow shafts (25/64" and 27/64"). At 4 inches in length, Zen provides the preferred vane surface area to stabilize large diameter arrow shafts in short distances.

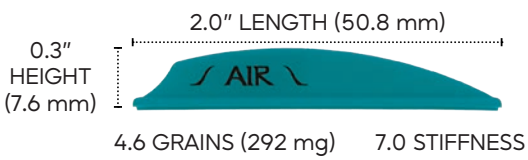

AIR
AR1000 MATERIAL


AIR –

101026 - 36 pk
101027 - 100 pk
101028 - 1000 pk

FITA/FIELD, RECURVE

#1 SELLING INTERNATIONAL TARGET VANE - DURABLE

The AIR vane was developed with input from some of the best long-distance shooters in the world for FITA and Field. Its low profile height (0.30") and reduced surface area are ideal for minimizing crosswind drift. The aerodynamic leading edge provides a smooth profile resulting in low turbulence while maximizing speed retention downrange.



Available in 2 sizes

BRONCO VANE
AR1000 MATERIAL

LENGTH	HEIGHT	GRAINS	STIFFNESS
4.0 Inch (101.6 mm)	0.52" (12.7 mm)	13.6	5.7
3.0 Inch (76.2 mm)	0.45" (12.7 mm)	9.5	6.2


	HUNTING	3D	CROSSBOW	INDOOR	FITA/FIELD	RECURVE
4.0 Inch	√		√	√		√
3.0 Inch	√		√	√		√

BRONCO –

10501* - 36 pk
10502* - 100 pk
10503* - 1000 pk *Specify length when ordering

THE ORIGINAL FLETCH-TITE® VANE - DURABLE

The Bronco vane's long profile is similar to traditional feathers but with superior durability. The 3.0" Bronco vane meets the requirements for NASP® arrows and is usable in all youth competitions.

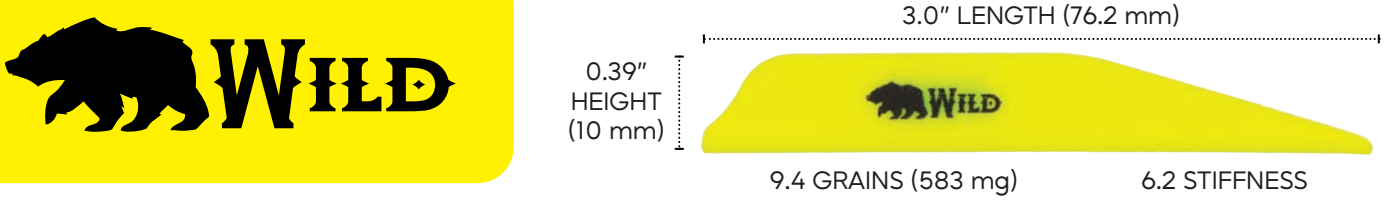

WILD VANE –

101082 - Wild Vane 100 pk
101083 - Wild Vane 1000 pk

RECURVE


MODERN PRECISION MEETS TRADITIONAL ARCHERY

The perfect blend of tradition and innovation with this low-profile archery vane, engineered specifically for barebow archers. Standing at just 0.39" (10 mm) tall, this vane eliminates clearance issues while maintaining exceptional stability and control. Designed with the needs of traditional and barebow archers in mind.

WILD VANES AVAILABLE IN 15 COLORS

OD	TN	NR	RD	NO	NY	NG	BL	SB	TL	PU	HP	BK	SL	WH
Olive Drab	Tan	Neon Red	Red	Neon Orange	Neon Yellow	Neon Green	Blue	Satin Blue	Teal	Purple	Hot Pink	Black	Silver	White

GRIFFIN VANE

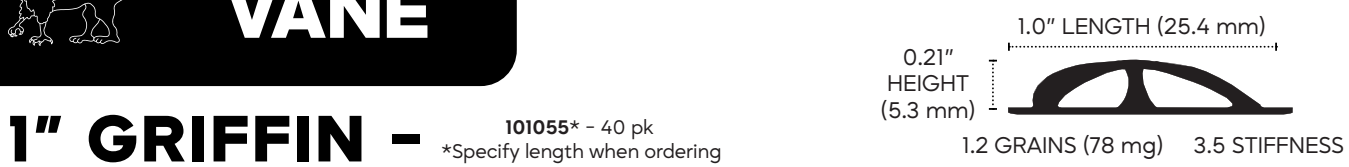


1" GRIFFIN –

101055* - 40 pk
*Specify length when ordering

RECURVE

FOR OLYMPIC RECURVE AND COMPOUND USING MICRO-DIAMETER ARROWS

Made of extremely durable, non-deforming vane material. The twisted ribbon design aids in arrow rotation and spins twice as fast as Mylar style vanes. The Griffin vane features a straight base for easy fletching and provides stable, accurate flight in any wind conditions. Includes clamp adapter for Pro Class style fletching jigs.

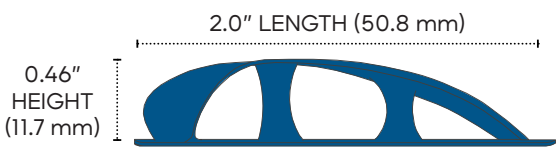

2" GRIFFIN –

101055* - 40 pk
*Specify length when ordering

3D, FITA/FIELD, INDOOR

TWISTED RIBBON DESIGN FOR COMPOUND BOWS

The 2" Griffin vane has a built in helical that allows for straight fletching while providing superior rotation of the arrow. Includes clamp adapter for Pro Class style fletching jigs.

GRIFFIN VANES AVAILABLE IN 9 COLORS

RD	NO	NY	NG	SB	HP	BK	SL	WH
Red	Neon Orange	Neon Yellow	Neon Green	Satin Blue	Hot Pink	Black	Silver	White

CROSSBOW PRODUCTS

CROSSBOW BOLT/ARROW WRAPS




AVAILABLE IN 6 COLORS

REF	NY	NG	HP	NO	WH
Reflective	Neon Yellow	Neon Green	Hot Pink	Neon Orange	White

Most crossbow users do not fletch their own bolts. We have designed these high visibility wraps to be put on **AFTER** the arrow has been fletched! They are sized to fit large diameter bolts (can be cut to width).

501013 - 6 pk Crossbow Bolt/Arrow Wraps

CROSSBOW BOLT/ARROW BOX

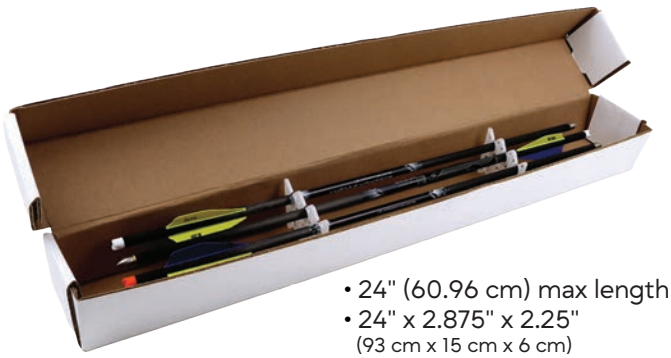

- 24" (60.96 cm) max length
- 24" x 2.875" x 2.25" (93 cm x 15 cm x 6 cm)

- Comfortably fits 6 crossbow bolts or arrows
- Easy to assemble
- Improved box design for enhanced durability
- Works with Bohning Boa arrow pads. See page 34

120003 - Crossbow Bolt Arrow Box - 50 pk
16092 - Boa Arrow Pad (1 pad)
311178 - Custom Crossbow Bolt Box Sticker - 50 pk

CROSSBOW LUBE KIT



- Contains Xccelerator Wax and Lightning Lube (string conditioner and rail lube applicator tubes for smooth crossbow operation
- Odorless and no mess application

801005 - Crossbow Lube Kit

Also available separately:

Lightning Lube
1363 - 1.18 oz (35 ml)
941019 - 16 pk
941019BOWL - Bowl + 16 pk
1363-250 - 250 tubes

Xccelerator Wax
1365 - 0.51 oz tube (14.5 gm)
1634 - 16 pk
1634BOWL - Bowl + 16 pk
1365-250 - 250 tubes

CROSSBOW NOCK



- .300" Half Moon Nock (7.70 mm)
- 11.0 grains (713 mg)

401008 - 12 pack
401009 - 100 pack
401010 - 1000 pack

SOLID COLORS AVAILABLE

RD	NO	NY	NG	BK	WH
Red	Neon Orange	Neon Yellow	Neon Green	Black	White



BOHNING ARCHERY PARTNER
@FATALIMPACTOUTDOORS



BOHNING ARCHERY PARTNER
@ADRENALINESEEKOUTDOORS



BOHNING ARCHERY PARTNER
@MADDY.HUNTS

COVERTECH
HD WINDOW CAMO

YOU CAN SEE THEM THEY CAN'T SEE YOU!



ODB



TANB



CGB



APX



EDGE



KOS



KFD



KOTB


8 COLORS AVAILABLE TO MATCH ANY BLIND AND FOLIAGE


CoverTech is made with a new, micro-perforated, and high definition material that is similar to looking through a screen or tinted window. It no longer strains the eyes like the old style material. CoverTech is printed on one side in High Definition Graphics which helps to break up your silhouette inside your blind.

- High Definition printed/pattern exterior
- Black micro-perforated backing
- One-way graphics

502099 - (1 pc.) 24"x59"
502000 - (1 pc.) 14"x36"
502000-3 - (3 pc.) 14"x36"







Contact us at info@bohning.com for a custom quote

CUSTOM SIZES AND PATTERNS AVAILABLE. CONTACT US!

TREE STAND SILENCING KIT



DON'T LET A LOUD TREESTAND RUIN YOUR HUNT!

Restore old, creaky, and weathered treestands with this 3-in-1 silencing kit from Bohning. Included Joint Wax, Hinge Oil, and Camouflage Moleskin Pads silence all joints, pins, hinges, and metal contact points while protecting your tree stand from additional wear. Contents are odorless, resistant to freezing, and mess-free.

- 11 gram tube Joint Wax
- 1/2 oz (14.79 ml) bottle Hinge Oil
- 4" x 6" moleskin (101.6 mm x 152.4 mm)

801023 - Blind & Stand Silencing Kit

BLIND & STAND SILENCING KIT



PROTECT YOUR ZIPPERS AND BUTTONS
Check out ZipSnap on page 4

NEED TIE-DOWNS FOR YOUR BLIND?
Hard Point stakes are available on the inside back cover page

DISPLAYS

IMPROVE POINT OF PURCHASE SALES

Show your products better and move them quicker!

FISHBOWL DISPLAYS

Every archer needs these products, so make it easy for them to find and purchase. Stock our most popular waxes and adhesives in these handy fishbowl displays. Place them near your cash register and save money on packaging and restocking with bulk purchases!



1630BOWL
Tex-Tite - 24 pk



1631BOWL
Seal-Tite - 24 pk



301029BOWL
Heritage Wax - 24 pk



1634BOWL
Xccelerator Wax - 16 pk



301025BOWL
Fletch Fuse - 24 pk



301015BOWL
Blazer Bond - 24 pk



941019BOWL
Lightning Lube - 16 pk



301028BOWL
ZipSnap® Wax - 24 pk



301019BOWL
String Shield - 16 pk



301023BOWL
Arrow Lube - 16 pk



1619BOWL
Broadhead Wrench - 24 pk

Put your brand on these products. Contact us today to get started with your custom product order.

STOCKED SNAPFIT DISPLAY

- 5 lbs (2.3 kg) shelf capacity
- 1 lb (.45 kg) hook capacity
- Made from engineering-grade recycled plastic
- Hooks attach to panels and columns
- Panels are reversible to hide or show Bohning logo
- Soft urethane feet for non-marring stability
- Slots in column caps accommodate standard foamboard signage
- Compact and lightweight to ship
- Additional/replacement parts available
- Easily combine multiple SnapFit products to create larger displays

Contact Bohning for more details and ordering:
231-229-4247
info@bohning.com

SNAPFIT BY BOHNING



YOUTH ARCHERY

Join the Bohning Youth Archery Schools and Clubs program!

- Receive reduced pricing on all products purchased through your program
- Free welcome package, including stickers, Bohning banner, and fletching jig
- Support for all Bohning products

SCAN TO LEARN MORE!

YOUTH COACH KIT

Everything a coach needs to fletch and re-fletch youth arrows. We have included our 3-vane advanced fletching jig, the Cauldron. We also include our best-in-class Strip Pro vane and wrap remover, along with SSR which cleans oils and adhesives from your arrow to ensure the best possible adhesion of vanes. We include our bow square for bow setup, and Ferr-L-Tite® to attach points, and 1 oz Blazer Bond® to attach vanes. With this package, you will be ready for the season!



- Cauldron Student Edition (1.5 degree right and straight inserts only)
- Strip Pro
- Bottle of SSR
- Bow Square
- Ferr-L-Tite® Hot Melt
- Blazer Bond® - 1 oz

COACHKIT - Youth Coach Tool Kit

PRO TIP: **The Cauldron Jig fletches 3 vanes at once with perfect indexing!**

Want to have custom vanes and wraps for your youth archery team? Contact us for more information!
custom@bohning.com

YOUTH/PARENTS TOOL KIT

Everything a youth archer or parent needs to fletch and re-fletch youth arrows. We have included a compact, foldable fletching jig, the Frontier Jig. We also include our best-in-class Strip Pro vane and wrap remover along with SSR which cleans oils and adhesives from your arrow to ensure the best possible adhesion of vanes. We include Ferr-L-Tite® to attach points and 0.5 oz Fletch Fuse to attach your vanes. With this package, any parent or youth archer can fletch or repair their own arrow



FOLDS FLAT!

- Frontier Student Edition (1.5 degree right and straight inserts only)
- Strip Pro
- Bottle of SSR
- Ferr-L-Tite® Hot Melt
- Fletch Fuse - 0.5 oz

PARENTKIT - Youth/Parent Tool Kit

PRO TIP: **The Frontier Jig fletches one vane at a time but folds flat for easy re-fletching at tournaments.**

Want a fun fundraising project for your team?
See our Arrow Pen Kits on page 34!

NASP® APPROVED VANES

After extensive testing, Bohning is recommending the 2.8" Atlas vane for youth archery setups. Fletched at 1.5 degree, this vane will fly true even at low speeds. The AR1000 vane material is soft enough to not damage rests and is resilient enough to perform for a complete season. Other Bohning vanes that comply with NASP® rules are the 3" X Vane and 3" Bronco Vane.

2.8" LENGTH (71.1 mm)

0.45" HEIGHT (11.4 mm)



See page 18

9.0 GRAINS 6.1 STIFFNESS

3.0" LENGTH (76.2 mm)

0.48" HEIGHT (12.1 mm)



See page 23

9.5 GRAINS 6.1 STIFFNESS

3.0" LENGTH (76.2 mm)

0.52" HEIGHT (12.7 mm)



See page 24

13.6 GRAINS 5.7 STIFFNESS

THE STRIP-PRO



1524 - Strip-Pro
801026 - Blades: 3 pk

- Strips your arrow shaft of all fletchings, glue, and arrow wraps. See page 42 for more details.

BOW SQUARE



801028

See page 42 for more information

FLETCH PREP CLEAR ARROW WRAPS



- Provides a clear, clean, and consistent fletching surface
- Works on all types of arrow shafts
- No tools required
- NASP® approved



5" WRAP (127 mm) - 30 pk
502091CL – 5" Standard

See page 12 for more details
Check out our patterned clear wraps on page 14

SLIP-ON ARMGUARD



801009 - Slip-on Armguard

PU Purple
HP Hot Pink
RD Red
BL Blue
BK Black
CAMO Camo

- Durable, yet flexible, and soft compression-fit material
- Easy on and off; protects the entire forearm
- Internal wear guard for a sleek design
- Available in Extra Small (black only), Small, Medium, Large

See page 33 for more details.

SSR CLEANING POWDER



801053
Shaker bottle - 2.65 oz (75 G)

See page 42 for more details.

ACCESSORY POUCH



701040BK

See page 41 for more details.

TUBE QUIVER



701029BK

See page 41 for more details.

YOUTH BOW CASE



701036BK

See page 41 for more details.

ACCESSORIES

SHOOT COMFORTABLY AND SAFELY

Essential gear that enhances accuracy, comfort, and performance

3-STRAP ARMGUARD



1689

- Made of heavy-duty Cordura
- Double stitched to prevent fraying
- Protects arms and holds loose clothing away from bow strings
- Adjustable, quick disconnect buckle straps

SLIP-ON ARMGUARD




801009

- Durable yet flexible and soft compression-fit material
- Internal wear guard for a sleeker design
- Easy on and off; protects the entire forearm
- Available in Extra Small (black only), Small, Medium, Large

Measure the distance around your arm at your wrist (A) and at your forearm (B). Add these two numbers together and use attached chart.

Size	Total Measurement
XS	Under 14.5" (37 cm)
Small	15"-16.5" (38cm-42cm)
Medium	16.75"-19.5" (43cm-51cm)
Large	19.75"+ (52+cm)

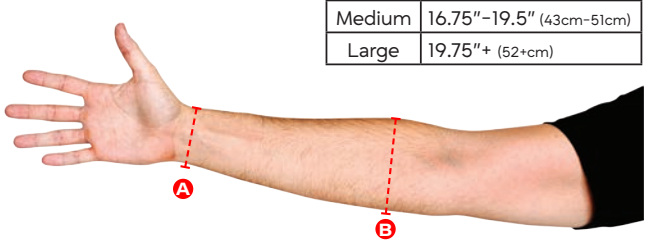


AVAILABLE IN 6 COLORS



PU Purple | **HP** Hot Pink | **RD** Red | **BL** Blue | **BK** Black | **CAMO** Camo

*XS available in black only

D-FLECTOR ARMGUARD

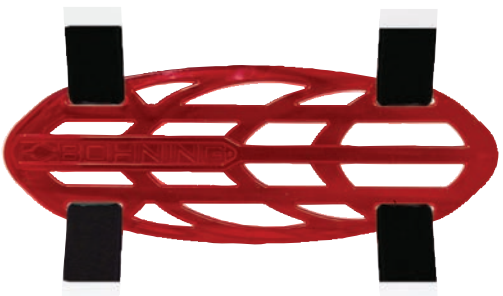

- Durable polycarbonate armguard
- Adjustable soft nylon straps
- Contoured design with a raised center

801092

AVAILABLE IN 10 COLORS

SOLID



NY Neon Yellow | **BK** Black | **WH** White

TRANSLUCENT



TL Teal | **PU** Purple | **RU** Ruby | **TG** Tangerine



KW Kiwi | **EB** Electric Blue | **RS** Rose Pink

WIND CHECK

NEW



16122 - 0.21 oz (6 grams)

- New and improved formula and packaging
- Detects the slightest air thermals
- Extremely fine, odorless and environmentally friendly
- Flip-top bottle for easy one-hand use

BOW GRIP/SIGHT WINDOW PAD



1602 - 2 pads

- Cut-to-fit soft moleskin pads prevent noise and add warmth
- Self-adhesive backing
- 4" x 6" (10 x 15 cm)
- Mossy Oak Break-Up Infinity

BROADHEAD WRENCH



MADE IN USA

- Easy-grip construction protects fingers while installing broadheads
- Works with 3 and 4 blade broadheads
- Excellent price point
- Color may vary

1619 – Single
1619-24 – 24 pack
1619BOWL – Bowl + 24 pack

ARROW LUBE



- For easy removal of arrows from targets
- No-mess applicator
- Silicone-based
- Available in a fishbowl display

301023 – 1.18 oz (35 ml)
301023-16 – 16 tubes
301023 – 250 – 250 tubes
301023BOWL – Bowl + 16 pk

UNIVERSAL ARROW BOX



- Newly designed for 2025
- Each box holds 12 arrows
- 34" max length (86.36 cm)
- 34" x 5.75" x 2.25" (86.36 cm x 14.6 cm x 5.72 cm)

1623 – Arrow Box – 50 pk

Also available in a crossbow bolt variation. See page 26

120003 – Crossbow Bolt Arrow Box – 50 pk

CUSTOM ARROW BOX STICKERS




- 50 custom stickers
- Sized to fit the universal arrow box
- Customized with your logo or branding
- 50 end stickers for arrow information

Arrow Box Sticker
1623STICKER – 50 pk

Crossbow Bolt Box Sticker
311178 – 50 pk

BOA & PYTHON ARROW PADS



- Boa holds 12 arrows of any size
- Can be split in half to fit the crossbow bolt arrow box. See page 26
- Python holds 12 arrows sized .219" (5.56 mm) to .35" (9.12 mm)

16092 – Boa (1 pad)
801047 – Python (1 pad)

ARROW PEN KITS

AVAILABLE TO SCHOOLS AND YOUTH CLUBS ONLY

GREAT FOR FUNDRAISING!



APKIT1 – Arrow Pen Kit 1

APKIT1 – Arrow Pen Kit 1 Includes:
- 110 pk black ferrules
- 100 pk Bic® Pens to match our ferrules
- 100 Standard width 8" Arrow shafts.
- 1 – 0.50 oz bottle of Fletch Fuse instant adhesive

Vanes, Wraps, & Nocks Included to Complete:
- 40 American Flag Pens
- 30 Olive Drab Camo Pens
- 30 White Topographical Pens

APKIT2 – Arrow Pen Kit 2 Includes:
- 110 pk black ferrules
- 100 pk Bic® Pens to match our ferrules
- 100 Standard width 8" Arrow shafts.
- 1 – 0.50 oz bottle of Fletch Fuse instant adhesive

Vanes, Wraps, & Nocks Included to Complete:
- 40 White Birch Pens
- 30 Neon Green X-Ray Pens
- 30 Blue Lightning Pens



APKIT2 – Arrow Pen Kit 2

PRO TIP: **Get arrow pen kits with custom vanes and custom arrow wraps.** Contact us at **custom@bohning.com**

ARROW PEN FERRULES



- 100 pk black ferrules
- Works with standard size carbon arrows and stick pens similar to Bic Cristal (not included)

990004BK


PRO TIP: **Turn broken arrow pieces into a product you can sell or advertising tool.**

STRING ACCESSORIES

SOFT-FLEX KISSER BUTTON



1665 – Kisser with clips



The Soft-Flex Kisser button by Bohning is a split ring design that is made out of a durable yet flexible material that is comfortable to shoot. You do not need to remove your string to install the kisser button. The softer material helps eliminate string noise and vibration. Available in a variety of colors to match your bow.

- Helps maintain a consistent anchor point every shot
- Flexible yet durable material
- 0.5" (12.7 mm) diameter
- Split design for easy installation. 2 enclosed clips

KISSER BUTTON



- Helps maintain a consistent anchor point for every shot
- Lightweight and durable, 0.5" (12.7 mm diameter
- Easy installation with 2 enclosed clips

1664 – Kisser w/ clips
801081 – 100 pk

"SLIM" PEEP



- Durable, high-impact, and lightweight
- 3/16" (4.7 mm) sight orifice, small profile for easy installation
- Individual peeps include 12" (30.5 cm tubing, bulk peeks do not

1668 – Peep with Tube
1640 – 50 pk (peep only)
1641 – 50 pk (tube only)
1' pieces (305 mm)

STRING WHISKERS



- 80 whisker strands per package, 4.5" (11.4 cm) long each
- Dampens string movement to help improve shooting comfort and consistency
- Reduces string vibration and noise
- Easy to install on bowstrings
- Durable material for repeated use
- Suitable for both target and hunting setups

1051 – 80 whiskers
1635 – 800 whiskers

STRING NOCKS



- Creates a positive nocking point for consistent shots
- Quick and easy to install

Hunter String Nocks (black liner)
For 12-14 strand strings – 5.4 grains (350 mg)

1064 – 6 pk
1067 – 100 pk
1070 – 1000 pk

Cam (red liner)
For 16-18 strand strings – 7.4 grains (480 mg)

1065 – 6 pk
1068 – 100 pk
1071 – 1000 pk

SERVING THREAD



NYLON

- Traditional nylon serving thread
- Use for end serving, peeps, and nocks
- 0.018 (0.46 mm) contains 90 yards (82.3 m)

1616 – 0.018" (0.46 mm)

#62 XS

- 20% stronger than normal serving thread
- Use for end serving, peeps, and nocks
- 0.021" contains 100 yards (91.4 m)

801001 – 0.021" (0.53 mm)

HALO

- 100% tightly braided Spectra suitable for end or center serving
- Highest durability
- 0.014" contains 120 yards (109.7 m)

801031 – 0.014" (0.36 mm)

SERVE-TITE



- Adjustable tension and smooth thread flow
- 2.25" x 1" x 2.5" (57.2 x 25.4 x 63.5 mm)
- Fits standard serving spool
- No thread included

16150 – Tool Only

MADE IN USA

STRING SEPARATOR



- Fast and easy installation of serving, peeps, silencers, etc
- Easily inserts into strands without damaging. Twist into separate strings
- 2" (50.58 mm) x .625" (15.87 mm) x 1" (25.4 mm)

1601 – Separator

FOR 80+ YEARS

You won't get any more traditional than these items!

Be sure to check out these other traditional archery products:
Ferr-L-Tite, our original adhesive, on page 6
Tex-Tite, the original bowstring wax, on page 4
Classic, T Nocks, and Legend Nocks on page 8
Arrow cresting tools and supplies on page 37

TRADITIONAL ARCHERY

PROUDLY MADE IN THE USA

WILD VANE



101082 - 100 pk
101083 - 1000 pk

A traditional archery vane with modern enhancements and capabilities. At only 0.39" tall, this vane is perfect for those looking to make clearance issues a problem of the past.

- Length: 3.0" (76.2 mm)
- Height: 0.39" (10 mm)
- Weight: 9.4 grain
- Optimized design for barebow shooting
- 10mm fin height for perfect clearance to performance ratio
- Straight-sloped nose for maximum efficiency
- Available in 15 colors

See more information on page 25

ARROW HOLDER



MADE IN USA



1527 - 1 Arrow Holder

- Innovative design holds securely but easily releases
- Recurve arrow holder molded from TPE for the best combination of durability and ease of use
- Vented Arrow Retainer optimized for traditional shaft sizes 9/32", 5/16", and 11/32"
- Functional on all shafts from .166" to 27/64"
- Easy installation with double sided adhesive foam (2 included). Peel off and press to fit

2-HOLE REST





- Recurve Arrow Rest made of medium hard material for the best combination of strength and forgiveness
- Available in either right or left-handed variations
- Easy installation with double sided adhesive foam. Peel off and press fit your new rest
- Two holes to allow for adjustability when installing around Berger button hole
- Take more accurate shots with a traditional bow setup

MADE IN USA

1526R - (1) 2-Hole Rest Right
1526L - (1) 2-Hole Rest Left
1526R-50 - (50) 2-Hole Rest Right
1526L-50 - (50) 2-Hole Rest Left
1526R-500 - (500) 2-Hole Rest Right
1526L-500 - (500) 2-Hole Rest Left

FEATHER-DRI



- Protect your feather fletchings from the weather
- Colorless, odorless, water-repellent powder
- Environmentally safe

1611 - 250 ml Feather-Dri Powder

FEATHER TOWER FLETCHING JIG



601010 - Feather Tower

See more information on page 3

TRADITIONAL ARCHERY NOCKS



T Nock

- Glue-on nock for swedged end aluminum, wood, and fiberglass shafts
- Choose from 5 colors
- Available in 1/4", 9/32", 5/16", and 11/32" diameters

1054T - 12 pack
1055T - 100 pack
1056T - 1000 pack

See more nocks on page 7

TRADITIONAL ARCHERY

SERVING ARCHERS FOR 80+ YEARS

ARROW CRESTING

Fully customizable, do-it-yourself, arrow building

REVOLUTION ARROW CRESTER

Bohning's traditional arrow crester has been rebuilt for efficiency and ease of use. The updated crester features a new and compact motor module, resulting in better spin on the arrow shaft due to redistributed weight. The new motor provides improved longevity and has fewer wires.

Cresting Kit Includes:

- One crester (made with wood base)
- Four paint brushes:
  Hairline, 1/8" (3.18 mm), 1/4" (6.35 mm) and 1/2" (12.7 mm)
- Adjustable arrow rotation speed of 130-440 RPM
- Ruler with Imperial and Metric measurements. Doubles as a pattern rest
- Carbon-brush motor that is quiet and durable
- International versions come with international power supplies that accept 110 or 220V



801080 - Crester with Brushes
801080INT - Crester with Brushes (international version)

CRESTING BRUSHES



- Made by Andrew Mack and Son Brush Co.
- Fine grade brushes
- Varnish handles
- Aluminum ferrules

1400 - Hairline, red sable bristle
1401 - 1/8" (3.18 mm) pony and goat hair
1402 - 1/4" (6.35 mm) pony and goat hair
1403 - 1/2" (12.7 mm) pony and goat hair

DIP KIT



- 1 glass dip tube
- 1 arrow hanger
- 2 pints (946 ml) of white Crest-Lac
- 2 pints (946 ml) of clear Crest-Lac
- 3 Dip n' Plug rings
- Dip tube holds up to four arrows at a time
- Tube accommodates up to 11" (28 cm) crown dip

801094 - Dip Kit
801095 - Dip Tube
801098 - Arrow Hanger
801100 - Dip 'n Plug Ring

CRESTING STARTER KIT PAINT SET

STARTER KIT COLORS

RD	YE	BL	SL	GO	BK
Red	Yellow	Blue	Silver	Gold	Black

301011KIT

- Six 1 oz jars of Crest-Lac paint
- Red, Yellow, Blue, Silver, Gold, and Black


FLETCH-LAC (SOLVENT-BASED)

SERVING ARCHERS FOR 80+ YEARS

- Industry standard for 80 years - top choice of custom arrow shops worldwide!
- Solvent-based cresting paints that dry to a hard, chip-resistant finish
- Ground transport only
- Thin with Fletch-Lac Thinner
- Dries on all shafts in less than 24 hours
- Improves fletching adhesion

If thinning is desired, use Fletch-Lac Thinner

1412 - 1 oz Jar (17.2 ml)
1105 - Pint (473.1 ml)
1106 - Quart (946.4 ml)
1107 - Gallon (3.79 L)

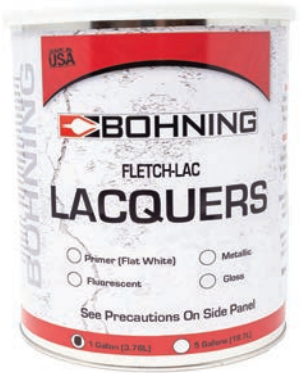

CREST-LAC (WATER-BASED)

- Acrylic water-based paint (no VOC)
- Dries to a glossy, extremely hard layer on any shaft in 24-36 hours (based on humidity in drying area)
- Improves fletching adhesion

If thinning is desired, use distilled water.
DO NOT USE PAINT THINNER

301011 - 1 oz Jar (17.2 ml)
301014 - Pint (473.1 ml)
301012 - Quart (946.4 ml)
301013 - Gallon (3.79 L)



FLETCH-LAC AND CREST-LAC AVAILABLE IN 22 COLORS:

GLOSS

RD	OR	YE	GR	BL	TL	PU	BK	WH
Red	Orange	Yellow	Green	Blue	Teal	Purple	Black	White

METALLIC

GO	SL	CO	PL
Gold	Silver	Copper	Pearl

FLAT

EB	OD	MWH
Earth Brown	Olive Drab	White Primer

FLUORESCENT

SG	RR	CH	BO	AP	SY
Signal Green*	Rocket Red*	Chartreuse*	Blaze Orange*	Aurora Pink*	Saturn Yellow*

*Registered Trademark of Pigment Company

FLETCH-LAC SEALANTS



SERVING ARCHERS FOR 80+ YEARS

Clear and Blue Clear

- Wood shaft seal coat or base dip to maximize adhesion
- Blue Clear produces sharper, brighter colors when dipped over white
- Not recommended for dipping over crested arrows

1124 - BC/CL Pint (473 ml)
1125 - BC/CL Quart (946.4 ml)
1126 - BC/CL Gallon (3.79 L)

Supercoat

- Single coat wood shaft seal
- Cures to a hard protective finish
- Not recommended for dipping over crested arrows

1120 - Supercoat Pint (473 ml)
1121 - Supercoat Quart (946.4 ml)
1122 - Supercoat Gallon (3.79 L)

FLETCH-LAC THINNER



- For use with all Fletch-Lac products
- Not for use with adhesives or Crest-Lac products

1130 - 2 oz (59.15 ml)
1131 - Pint (473 ml)
1132 - Quart (946.4 ml)
1133 - Gallon (3.79 L)

SERVING ARCHERS FOR 80+ YEARS


QUIVERS

CROSSBOW COMPATIBLE
BRUIN and LYNX quivers are crossbow compatible

BRUIN QUIVER
VERTICAL ADJUSTMENT WITH HANGING LOOP

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- High-impact composite stem provides the strength of metal without the weight
- Updated built-in hook eliminates vibration and allows easier hanging
- Equipped with Lever-Lock mounting system
- 2" (5 cm) vertical adjustment to fit your bow crossbow perfectly

201030KH

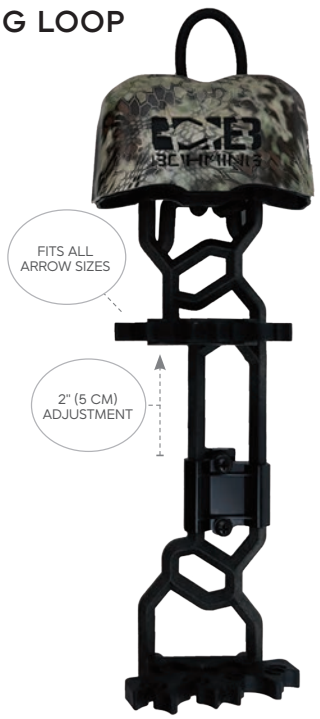

201030BKRD



201030BKBK



201030CFRD



201030CFBK



201030MOC



201030RE



201030 - Indicate hood and line color

HOOD COLOR CHOICES



BK Black
CF Carbon Fiber
MOC Mossy Oak Break-up Country
KH Kryptek® Highlander
RE Realtree® Edge

LINER COLOR CHOICES



BK Black
RD* Red

* Red liner available only with Black or Carbon Fiber hoods

MADE IN USA


LYNX QUIVER
THE CLASSIC

- Dual-retainer, 4 arrow quiver
- Molded hood and liner for quiet storage of any broadhead style
- Lightweight, durable molded stem
- Equipped with the Lever-Lock mounting system
- For standard carbon arrows

201013MOC



HOOD COLOR CHOICES



BK Black
RE Realtree® Edge
MOC Mossy Oak Break-up Country

1038



201013RE



1038 - Black
201013RE - Realtree Edge
201013MOC - Mossy Oak Break-up Country
1045 - Retainer Set for .166" Arrows

LEVER LOCK



- Uses standard 1 5/16" (33.3 mm hole spacing
- Secure mounting system
- Easily attached to quiver
- Quiet (doesn't click!)
- Fits Bruin and Lynx quivers

1073 - Lever Lock

MADE IN USA

3-IN-1 SLING QUIVER

QUIVER, SLING, HOIST ROPE



701080BK - Sling Quiver

- Protects bows, arrows, strings, cables, and sight
- Fits bows from 28" to 40.5" total length (not ATA)
- Waterproof and quiet materials
- Includes 4 arrow Bruin Quiver attached to the sling
- Includes a heavy-duty hoist rope and handle
- Arrow restraint to keep arrows safe
- Multiple storage pockets

The new 3-in-1 Sling Quiver is designed to get your equipment from the vehicle to the stand while protecting your strings, cams, cables, and sight. The sling has our Bruin Quiver mounted to it. Once you are at your stand, the hoist rope allows you to easily get your equipment into position.



Protects bow, cams, strings, cables, and sight from the car to the stand.

Waterproof, silent, neoprene bow sling makes carrying your bow through the roughest terrain easy.



Includes a heavy-duty hoist rope and handle to get your bow into the stand. Hoist rope can be used to tie off the Sling to the tree once in your stand for easy access to your arrows.



Our 4 arrow quiver mounts on the sling so there is no need to attach to your bow or remove it once in your stand.

Hoist rope and handle fits inside of the built-in pocket on the sling.



Paracord Color and Carabiner style may vary.

POCKET QUIVER

CONVENIENT 6 ARROW QUIVER

- Dimensions: 3.75" x 5.125" x 1.25"
- Convenient, secure, holds any arrow diameter
- Attach to pocket, belt, or pack
- Put one in each pocket to hold one dozen arrows
- Prevents damage to arrows and unclutters your pack
- Securely holds arrows and bolts







201035BK - Pocket Quiver
201035BK-10 - 10 pk

POCKET QUIVER SNAPFIT™ DISPLAY



- Order 12 Pocket Quivers and receive a FREE SNAPFIT™ tabletop display
- Compact tabletop design
- Great for impulse point of purchase sales
- Easy to assemble and hang product

201035BK-12SF

MADE IN USA

BOW CASES AND TUBE QUIVERS

FOR SAFELY TRANSPORTING YOUR BOW AND ARROWS

ADULT BOW CASE





Adult Bow Case Interior - Color may vary

- 44.5" (113 cm) x 19.5" (50 cm)
- Fits bows up to 37" (94 cm axle to axle
- Large outer storage pocket and zippered interior mesh pocket
- Made of premium Cordura® Nylon

701037BK

YOUTH BOW CASE





Youth Bow Case Interior - Color may vary

- 40" (102 cm) x 15.8" (40 cm)
- Fits most youth bows (including Genesis®)
- Outer arrow storage pocket and 3 zippered interior pockets

701036BK

TUBE QUIVER



701029BK

- 19" (48 mm) in length
- 2 high capacity, durable, solid base arrow tubes. Each tube easily fits 6 standard sized arrows
- Ambidextrous design
- Mesh storage pocket

(2) Arrow Tubes:
18" (437 cm) long - 1.2" (30 cm) I.D.

ACCESSORY POUCH



701040BK

- Easy to access pouch with two zippered exterior storage compartments
- Split interior compartment to help keep you organized
- Designed to accommodate the target archer's demands
- Secure locking drawstring pouch closure
- Water resistant
- Strong and comfortable belt loop Fits up to 2.5" (6 cm) belt

Dimensions:
6.25" (16 cm) Width
5.75" (15 cm) Height
3.5" (9 cm) Depth

TOOLS

SHOOTER STOOL

COMFORT AND CONVENIENCE

- Double stitched and reinforced bag with multiple storage compartments and built-in cooler
- 3 carrying options (hand, shoulder strap, backpack with chest clip)
- 300 pound (136 kg) capacity



701058BK - Stool with arrow tubes/ umbrella holder
701055BK - Stool Only



BUILT-IN COOLER



BACKPACK AND STRAP CARRYING OPTIONS

THE STRIP-PRO

ERGONOMIC DESIGN FOR REMOVING ARROW WRAPS AND VANES



- Strips your arrow shaft of all fletchings, glue, and arrow wraps
- Ergonomic design. Will not damage carbon arrows when used correctly
- New and improved handle for better grip/ease of use
- Safe for all arrows/diameters
- Extra blade storage in handle
- Replacement blades available
- Made in USA

1524 - Strip-Pro
801026 - Blades: 3 pk

SSR CLEANING POWDER

ARROW SHAFT CLEANER




- Concentrated cleaning powder removes dirt, grease, residue, and contaminants
- For carbon, aluminum, and fiberglass arrow shafts
- Use on a scour pad with hot water to scrub, then rinse

801053 - Shaker bottle - 2.65 oz (78.4 ml)

BOW SQUARE

MULTI-USE BOW SETUP TOOL

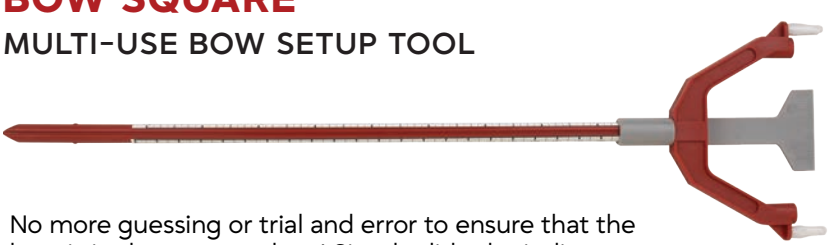


No more guessing or trial and error to ensure that the loop is in the correct place! Simply slide the indicator back and forth as needed to start and finish your D-loop or nock sets.


- Imperial and Metric Measurements


MADE IN USA

801028 - Bow Square


MEASURE BRACE HEIGHT


CAM ALIGNMENT


D-LOOP SET-UP


CAM MEASUREMENT

APPAREL

BOHNING BRANDED ATTIRE

Shirts, hoodies, hats, banners, and more

PULLOVER HOODIE



- Duck brown pullover hoodie with black Bohning logos
- Sizes SM – 2XL

HOODIE26

LONG-SLEEVE HOODED SHIRT



- Lightweight Navy long-sleeve shirt with built-in hoodie
- Athletic sportswear material
- Sizes SM – 2XL

LSTSHIRT26

SHOOTER JERSEY



- Pro style short-sleeve Bohning jersey
- White jersey with cobalt blue accents and dark navy topographical pattern
- Sizes SM – 2XL

JERSEY26/27

T-SHIRT



DETAIL VIEW

- Cotton blend military green frost t-shirt with tan topographical Bohning logo
- Sizes SM – 2XL

TSHIRT26

BROWN TRUCKER HAT



HAT26A

- Caramel brown and black trucker style hat with laser engraved Bohning patch
- Snapback closure

NAVY LOW PROFILE HAT



HAT26B

- Navy and khaki low-profile hat with embroidered Bohning logo
- Snapback closure

WOMEN'S CRISS-CROSS PONYTAIL CAP



701043WM

- Charcoal grey criss-cross back design allows for high messy bun or high ponyail to fit comfortably
- Velcro buckle closure

PERFORMANCE VISOR



701005RD 701005BK

- Low profile visor that provides a sleek and sporty look
- Lightweight, breathable and moisture wicking
- Velcro buckle closure

BOHNING BANNERS



BANNER-USA



BANNER-RD

- 48" x 24" (122 cm x 61 cm) vinyl banner
- Show off your Bohning Archery pride
- Great for your shop, range, or garage

BANNER-USA - USA Flag Pattern
BANNER-RD - Mountain Theme



TECHNICAL GUIDE

Bohning has created this technical guide to help answer many frequent questions we get about our products and archery in general. If you cannot find the answers you are looking for here feel free to reach out to us directly. We do our best to answer every question we receive.
EMAIL: *info@bohning.com*

For a digital version of this guide located on our website, scan this QR code

Table of Contents

Vanes ____ 46
- Helical/Offset ____ 46
- Vane Adhesion ____ 47
- About Bohning Vanes ____ 48

Adhesives ____ 49
- About Bohning Adhesives ____ 49

Nocks ____ 50
- Nock Inspection ____ 51
- About Bohning Nocks ____ 51

Points ____ 52
- About Bohning Points ____ 52

Wraps ____ 53
- About Bohning Wraps ____ 53

Fletching Jigs ____ 54
- About Bohning Jigs ____ 55

Waxes & Lubes ____ 56
- About Bohning Waxes and Lubes ____ 56

Link to Website & Additional Info ____ 56

VANES WHAT VANE SHOULD I USE?

WHY DO WE ATTACH VANES TO ARROWS?

In archery, vanes or fletchings are the small fins attached near the back of an arrow shaft, and their main purpose is to stabilize the arrow in flight. They create drag and, when applied with an offset or helical, induce spin, which helps the arrow fly straighter and more consistently. This stabilization allows the arrow to recover quickly from minor imperfections at release, such as finger torque or rest contact. This, in turn, improves accuracy and grouping, especially at longer distances. Vanes also provide steering, with larger or more offset fletchings offering greater control, which is particularly important when shooting broadheads that create more wind resistance.

IN SHORT: vanes help keep the arrow pointed in the right direction, reduce wobble, and enhance overall accuracy.

CHOOSING A VANE CAN BE BROKEN DOWN INTO THESE CRITERIA:

SURFACE AREA

The size of vane you choose should match the diameter of the shaft you are shooting: larger diameter arrows require more vane surface area to stabilize, making longer and/or taller vanes ideal for indoor arrows. Fixed-Blade broadheads also demand more surface area and height to keep the arrow flying true, since their large blades create added weight, drag, and a "planing effect". Conversely, micro-diameter shafts need less surface area to spin, so smaller vanes are sufficient and also provide the advantage of reduced wind drift and better speed retention. Keep in mind that vane height may be limited by clearance in your personal setup.

IN SHORT: match vane size to arrow diameter and point style—larger shafts or broadheads need larger vanes, while smaller shafts with field points perform best with smaller vanes.

MATERIAL

The material of a vane affects its weight, durability, forgiveness, and the amount of noise it produces in flight. Stiffer materials are typically lighter and quieter, making them a good choice for hunters or anyone concerned about rear arrow weight. Softer materials, on the other hand, are barely louder but offer greater forgiveness and durability, as they can better withstand contact with rests, cables, branches, or other arrows.

IN SHORT: choose stiff vanes for lighter, quieter performance, or soft vanes for maximum forgiveness and durability.

EASE OF FLETCHING

If you're fletching your own arrows, consider how easy it is to get vanes to adhere securely to the shaft. All Bohning vanes come pre-primed and ready to glue. Additional preparation steps may be required with other fletching brands. Always check the manufacturer's instructions and recommended glues to ensure proper adhesion and consistent results. To eliminate unknown variables in the fletching process, cleaning arrow shafts with SSR powder is always recommended.

IN SHORT: choose vanes with a fletching process that matches your skill level and the equipment you have on hand.

HELICAL/OFFSET HOW SHOULD I FLETCH MY VANE?

WHY DO WE FLETCH VANES AT AN OFFSET OR HELICAL?

The main purpose of a vane is to stabilize your arrow by encouraging spin. An arrow flying without any rotation is similar to a paper airplane; it can fly straight, but only if it is perfectly symmetric and flawless. Now imagine that same "paper airplane" only this time spinning about its long axis like a rotating arrow. The veering effects of any minor imperfections are now "canceled out" with each rotation because it is effectively veering the same amount in all directions, negating the error! Each rotation of the arrow = 1 error correction. This flight correction effect makes the added drag associated with angled vanes worth the energy loss. It is up to the archer to then find the right balance: Generally, with longer shots of 35+ yards, use less helical (1-2 degrees). For shorter shots under 35 yards, use heavy helical (2-3 degrees).

WHAT IS THE DIFFERENCE BETWEEN OFFSET AND HELICAL?

Manufacturers use different ways of classifying helicals/offsets, which can be confusing when making comparisons. First of all, let's clarify that helicals and offsets are essentially the same thing. A helical is defined as any vane angle that is not a 0° straight fletch. An offset is, quite simply, a minor helical and usually refers to anything between 0° and 2°. A vane that is fletched at greater than 2° appears more twisted due to way it wraps around the shaft. A vane

fletched at less than 2° still has a helical "twist," it is just less noticeable. There are two main ways to specify the degree of an offset/helical. Figures A and B show the same helicals represented in different ways.

1. Top View of the shaft: this is the classification used by Bohning & most other manufacturers, in which offsets/helicals are measured independent of vane length.
2. End View of the shaft: this is the measurement system used by some jig manufacturers in which the offset/helical is given per inch of vane length (eg 10° /inch), making the values appear higher. Note – measurements in this system can vary with arrow diameter.

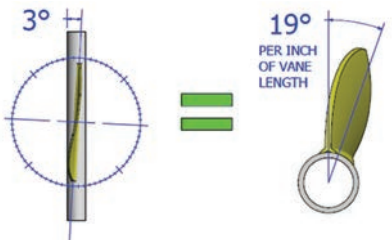


FIGURE A TOP VIEW

FIGURE B END VIEW

Top View Helix Angle	End View Helix Angle Equivalent*						
Any Length Vane	Vane Length in Inches						
	1.0"	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"
1°	6.5°	9.75°	13°	16.25°	19.5°	22.75°	26°
2°	13°	19.5°	26°	32.5°	39°	45.5°	52°
3°	19.5°	29.25°	39°	48.75°	58.5°	68.25°	78°
4°	26°	39°	52°	65°	78°	91°	104°

Values based on standard carbon shaft diameter (0.30" O.D.)

IN SHORT: offset or helical fletching makes your arrows spin, which stabilizes them. Helical and offset are primarily the same thing, and left or right helical simply determines the direction of spin. Consistency across your arrows is the key.

VANE ADHESION WHY ARE MY VANES NOT STICKING?

PREVENTING ADHESION PROBLEMS

- Always prepare your arrow shaft. Proper shaft prep is very important for strong adhesion.
- Follow all instructions and allow proper clamp and cure time for adhesives.
- Fletch arrows and allow to cure in a controlled climate with low humidity (30-50% relative humidity). If humidity is too high (especially above 70% relative humidity) we recommend fletching with an instant adhesive such as Blazer® Bond or Fletch Fuse.
- Make sure none of these items are in your fletching area: Silicone-based aerosols, carbon dust, oils, chemicals, pet hair, food, beverage, etc.
- Use the correct amount of glue on vane base.
- Clean jig clamps/arms frequently. Do not scrape excess glue, follow manufacturers instructions to clean properly.
- All glues have an expiration date. Make sure yours is still good.

IDENTIFYING ADHESION PROBLEMS

If your vane has fully or partially separated from the arrow shaft, the following scenarios may help you narrow down the cause:

ADHESIVE IS ON THE SHAFT, VANE BASE IS FREE OF ADHESIVE: usually indicates a problem with vanes. Some brands of vanes are manufactured using a release agent and must be cleaned prior to fletching. Some brands require the application of a primer to the vane base prior to fletching. **Bohning vanes do not require either of these steps as they come with primer already applied to the base – for this reason DO NOT CLEAN OR PRIME YOUR BOHNING VANES.**


ADHESIVE IS ON THE VANES, ARROW SHAFT IS FREE OF ADHESIVE: usually indicates a problem with the arrow shaft. Some shafts require additional abrasion and cleaning. If all else fails, the best solution may be to use a wrap or to dip the arrow shaft in paint.

ADHESIVE IS ON BOTH VANE AND ARROW SHAFT: could indicate a jig not properly set up, inadequate clamp time, uneven pressure, or a damaged clamp (if you have numbered your clamps, look for a pattern in the failure). It could also indicate that the glue has not been allowed to cure for the recommended amount of time prior to shooting, that there is a contaminant on parts of the shaft or vanes, or too much or too little humidity is present for the adhesive selected.

ABOUT BOHNING VANES:

SURFACE AREA:

Bohning offers 20+ unique vane styles and profiles. We have created the table below to help you in your decision making. Our recommendations are based on aerodynamic properties of each vane and the arrow diameter used in the event listed. Keep in mind not everyone uses the same set-ups so the following should be used as a general guideline. Feel free to try out vanes for what you feel will work for your specific set-up. The choice is up to you!

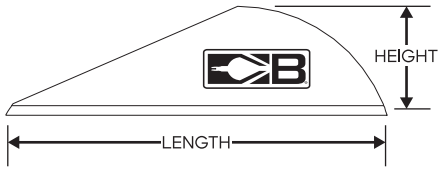

NOTE: All Bohning Vanes are measured using "Installed" height not the overall height of the vane.

MATERIAL:

The **AR1000** is our original vane material that has been used on some of our most popular vanes of all time, like the Blazer. This material is our most durable, and forgiving, and will give you the most choices when deciding what glues to use to attach your vanes to your arrows. You can use either solvent-based glues like Fletch-Tite Platinum or instant glues like Blazer Bond and Fletch Fuse.

The **AR1250** vane material is ultra stiff and many people will tell you they are the quietest vanes on the market. We recommend them for long distance shooting and for use in high-speed bows and crossbows. Vanes made from AR1250 can be challenging to bond using solvent-based adhesives in certain setups or conditions, especially if using a jig without adequate pressure and even contact. For the most reliable and efficient adhesion, we recommend using instant glues like Blazer Bond® or Fletch Fuse®.

EASE OF FLETCHING

Every Bohning vane produced, in either material, is pre-primed and ready to adhere to your arrow. No cleaning or priming should be performed. Simply clean your arrow correctly and they will stick! #bohningvanesstick

BELOW IS A LISTING OF BOHNING VANES AND OUR RECOMMENDATIONS FOR USAGE BASED ON ARROW DIAMETER TYPICALLY USED:

Vane	Length	Material	Hunting	3D	Indoor	Fita/Field	Xbow	Recurve	Height	Weight	Stiffness
Air	2.0"	AR1000				√			0.30"	4.6 gn	7.0
Alpha	2.8"	AR1250	√	√	√		√		0.45"	8.5 gn	8.6
Atlas	2.8"	AR1000	√	√	√		√		0.45"	9.0 gn	6.1
Black Sky 2.0	2.0"	AR1250							0.53"	6.1 gn	8.5
Blazer	2.0"	AR1000	√	√	√		√		0.53"	6.6 gn	6.0
Bronco	3.0"	AR1000	√		√		√	√	0.45"	9.5 gn	6.2
Bronco	4.0"	AR1000	√		√		√	√	0.52"	13.6 gn	5.7
Griffin	1.0"	AR1400						√	0.21"	1.2 gn	3.5
Griffin 2"	2.0"	AR1400			√	√			0.46"	6.2 gn	4.5
Heat	2.5"	AR1250	√	√			√		0.44"	6.2 gn	9.0
X Vane	1.5"	AR1000		√	√	√			0.35"	3.5 gn	6.8
X Vane	1.75"	AR1000		√	√	√			0.40"	4.5 gn	6.6
X Vane	2.25"	AR1000	√	√	√	√			0.36"	6.0 gn	6.7
X Vane	3.0"	AR1000	√	√	√		√		0.48"	9.5gn	6.1
X Vane	3.5"	AR1000	√	√	√		√		0.49"	12.0 gn	5.8
X3 Vane	1.5"	AR1250		√	√	√			0.35"	3.3 gn	9.3
X3 Vane	1.75"	AR1250		√	√	√			0.40"	4.3 gn	9.0
X3 Vane	2.25"	AR1250	√	√	√	√			0.36"	5.5 gn	9.0
X3 Vane	3.0"	AR1250	√	√	√		√		0.48"	8.8 gn	8.6
X3 Vane	3.5"	AR1250	√	√	√		√		0.49"	11.6 gn	8.8
Wild	3.0"	AR1000	√					√	0.38"	9.4 gn	6.2
Zen	4.0"	AR1000			√				0.37"	11.2 gn	6.5

CHOOSING AN ADHESIVE:

There are many factors which will affect your decision on what glue to use for making your arrows.

SOME OF THESE INCLUDE:

Application: different uses (fletching, installing inserts, etc.) require different adhesives. The material of the arrow shaft will also be a determining factor.
Environment: some adhesives are best in high humidity, while others work best in low humidity
Viscosity (resistance to flow): For most applications, you may choose the thickness of glue according to your personal preference.
Time: each adhesive requires a specific clamp time and cure time. Bohning glues do NOT require, and should NOT be used with, an accelerator or adhesive primer.

ABOUT BOHNING ADHESIVES:

Adhesive	Applications	Shaft Type	Clamp Time *(time in jig)*	Cure Time *(before using arrow)*	Info
Fletch-Tite Platinum®	Vanes Feathers Swedged Nocks	Carbon Wood Aluminum Fiberglass Wrapped Painted	5 Min	MIN. 24 hours (48 hours is best)	Flexible bond - does not crack or become brittle Cures best in low humidity application 2 years expiration on unopened tubes Easy jig clean-up. Simply scrape off with fingernail Can be used to tip-and-tail vanes for extra security DO NOT store in the refrigerator*
Blazer Bond®	Vanes Swedged nocks	Carbon Wood Aluminum Fiberglass Wrapped Painted	20 Sec.	2 Hours (50% Relative Humidity Required)	Fastest cure Instant, rigid-bonding glue in liquid form Medium viscosity (Bohning's most liquid CA glue) Begins curing on contact Best for high humidity application One year expiration on unopened containers*
Fletch Fuse®	Vanes Swedged nocks	Carbon Wood Aluminum Fiberglass Wrapped Painted	30 Sec.	2 Hours (50% Relative Humidity Required)	Instant, rigid glue in liquid form Medium viscosity (thicker than Blazer Bond) Begins curing on contact Best for high humidity application One year expiration on unopened containers*
Arrow Lock	Points Inserts Outserts	Carbon Wood Aluminum Fiberglass	90 Sec.	30 min (24 hours is best) (50% Relative Humidity Required)	Rubberized instant glue for inserts and glue in points Flexible when cured – won't release points in target Works on all shaft types 0.71 Oz bottle good for approximately 100 inserts
Insert Iron	Points Inserts Outserts	Carbon Wood Aluminum Fiberglass	N/A	48 Hours (72 if air is dry) (50% Relative Humidity Required)	Strongest glue Cures with moisture - best when applied in humid conditions Not reversible DO NOT store in refrigerator*
Ferr-L-Tite® (Amber)	Points Inserts Outserts	Wood Aluminum	N/A	As soon as it has reached room temp. (~5 min.)	Hot melt adhesive Heat reversible on aluminum shafts. Flame required No expiration*
Ferr-L-Tite® Cool Flex (Blue)	Points Inserts Outserts Pin Bushings	Carbon Fiberglass	N/A	As soon as it has reached room temp. (~5 min.)	Hot melt adhesive (low melt temperature) Heat reversible - no flame required No expiration*
Fletching Tape	Feathers Mylar vanes	All	N/A	Immediate	Pressure sensitive adhesive 3 year expiration

*Do not store in refrigerator with food. This is a good rule to follow for all adhesives!

WHAT IS THE PURPOSE OF A NOCK?

A nock is the small slotted piece at the back end of an arrow shaft, and while it may look simple, it plays a vital role in archery. Its main purpose is to attach the arrow securely to the bowstring, keeping it in place before and during the draw while allowing for a smooth release. The nock ensures consistent alignment by positioning the arrow in the same spot on the string every time, which is crucial for accuracy. It also facilitates efficient energy transfer from the bowstring to the arrow shaft at the moment of release, helping the arrow fly straight and true. Additionally, the nock sets the orientation of the arrow's fletching, ensuring proper clearance around the bow and stable arrow flight.


IMPORTANCE OF A NOCK

- Accuracy: Even a slight misalignment in how the arrow meets the string can cause a big loss in precision.
- Consistency: Every arrow leaves the bow from the same position and angle.
- Safety: A damaged or ill-fitting nock can cause a "dry fire" (string slips without pushing the arrow correctly), which may damage the bow or injure the archer.
- Customization: Archers can rotate or change nocks to fine tune fletching clearance and arrow flight.

IN SHORT: the nock is the anchor point between bow and arrow—a small part with a huge influence on safety, consistency, and accuracy.

In a join effort, Bohning and Beiter have created a new standard for pin nocks. Read more online here:

NOCK TERMINOLOGY

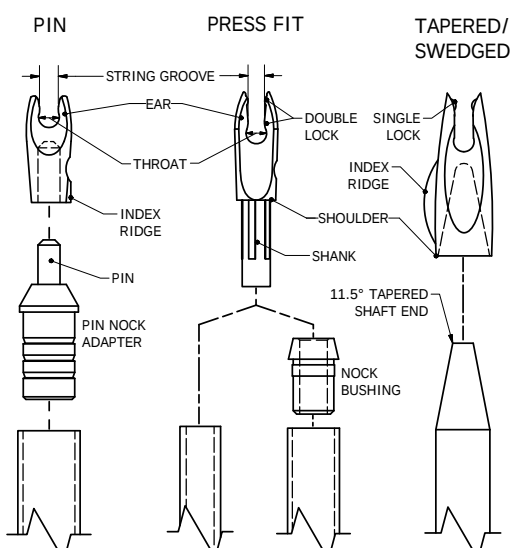

- **Double Lock** – Two sets of small nubs in the string groove that "snap" the nock onto the string
- **Ears** – The two protrusions of the nock that clip onto the bow string
- **Index Ridge** – A small rib on one side of the nock that helps an archer orient the arrow by feel
- **Nock Bushing** – An adapter used to fit relatively small press fit nocks into larger arrow shafts
- **Pin** – The short metal post that a pin nock is pressed onto when installed
- **Pin Nock Adapter/Bushing** – The metal insert necessary to install a Pin Nock on a hollow shaft
- **Shank** – The part of some nocks that fits inside of an arrow shaft or nock bushing
- **Shoulder** – The base of the nock that sits flush against the end of the shaft or adapter
- **Single Lock** – A single set of nubs in the string groove that "snap" onto the bowstring
- **String Groove** – The space between the ears of a nock, measured at the narrowest part
- **Swedged Shaft** – An arrow shaft with a tapered end
- **Tapered Shaft End** – An 11.5 degree cone at the end of a swedged arrow shaft ideal for glue-on nocks
- **Throat** – The bottom of the string groove where the string sits during shooting

NOCK SIZING

Nominal I.D.	0.166"	0.204"	0.231"	0.246"
Industry Name:	"Micro"	"Small"	"Reduced"	"Standard"
Bohning® Nocks:	F-Nock®	A-Nock®	H.E. Nock	Blazer Nock® Signature Nock® Smooth Release Insert Nock
Easton® Nocks:	G-Nock	X-Nock	H-Nock	S-Nock
Size Family:	"4mm"	"5mm"	"6mm"	"6.5mm"

CHOOSING A NOCK CAN BE BROKEN DOWN INTO THESE CRITERIA:

TYPE OF ATTACHMENT
To choose the right nock, you first need to know how it installs. There are three main styles:

- **Insert or Press-fit nocks** are the most common today. They snap directly into the back of the shaft or a bushing and can be easily replaced or rotated for fletching clearance.
- **Pin nocks** fit onto a separate metal pin glued into the back of the shaft. This setup is popular with competitive archers because the pin protects the shaft from rear impact and ensures a consistent, standardized nock fit.
- **Glue-on nocks** are bonded permanently with adhesive. This traditional style is most often used on wooden arrows or shafts with swedged ends.

DURABILITY
Even the smallest crack in a nock can cause dangerous failure. Modern bows are more efficient than ever, transferring a high percentage of stored energy directly into the arrow. Because all that force passes through the nock, it's critical to use a nock that is tested and strong enough to withstand the pressure.

SIZE
Your nock must match the diameter of your shaft or bushing. Using the correct size ensures proper alignment, safety, and consistent arrow performance.

A nock should clip onto the bowstring firmly enough to stay in place but not so tight that it pinches or resists a clean release. Ideally, a light tap on the string should knock the arrow free, proving the fit is snug but not overly tight. Inside the shaft, the nock must seat straight and secure, with no wobble or gaps. Press-fit and insert nocks should sit evenly, while glue-on nocks should be bonded cleanly without excess adhesive. A proper fit ensures safe shooting, consistent arrow flight, and reliable accuracy.


IN SHORT: Choose a nock based on how it attaches, make sure it's strong enough for your bow, match it to your shaft size, and ensure it fits both the string and shaft securely but not too tightly.

INSPECTING YOUR NOCK:
The smallest crack in your nock can lead to a major failure on your next shot. Just like your arrow shaft, it is important to inspect your nock before every shot. Nock damage often occurs at the target when arrows come into contact with each other. For example, you may graze one of your arrows, creating a tiny crack in the shoulder of your nock. From that crack, other minuscule cracks may be radiating deep into the nock, potentially propagating into a major fracture the next time the arrow is shot. This, of course, could both harm you and damage your equipment. When in doubt, replace the nock.

ABOUT BOHNING NOCKS:

DOUBLE LOCK VS SMOOTH RELEASE
A double lock nock has two sets of small nubs in the string groove that "snap" the nock onto the string. This style nock is best used for hunting and for youth as it is an insurance to keep your arrow on your string. A smooth release nock is made for target archers that want the least amount of contact with the string.

NOT ALL NOCKS ARE CREATED EQUAL
Modern bows are more efficient than ever, transferring more stored energy into the arrow. That energy passes through a single component—the nock—making its strength and reliability critical. At Bohning, we've invested decades of expertise, testing, and innovation to ensure our nocks keep pace with today's high-energy bows.

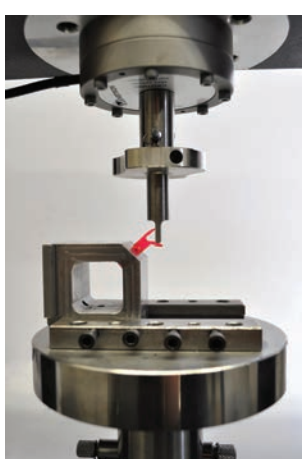

Every design goes through a rigorous process: computer simulations to identify weak points, precision in-house tooling, and expert craftsmanship that ensures consistency from one nock to the next. Once produced, nocks undergo destructive lab testing and demanding range trials. Our toughest accelerated lifecycle testing—requires a single nock to endure over 1,000 shots from a custom bow producing more than 110 ft-lbs of kinetic energy, nearly double that of most hunting bows. Only designs that pass these tests reach the market.

By focusing on resilience—the ability to transmit energy without permanent deformation, we guarantee that Bohning nocks provide unmatched consistency, durability, safety, and performance at an affordable cost.

IN SHORT: Bohning nocks are engineered and tested to handle the extreme energy of modern bows, giving archers confidence in every shot.

POINTS WHAT POINT SHOULD I USE?

CHOOSING A POINT:

A quality field point is essential in archery because it directly affects both performance and safety. Precision-made points ensure consistent weight and shape, which means your arrows will fly uniformly and group tightly, building accuracy in practice. Poorly made or inconsistent points can cause arrows to wobble in flight, drift off target, or even damage the shaft. Durability is also critical—a well-constructed field point resists bending, breaking, or loosening after repeated shots into tough targets. Since field points are often used for thousands of practice shots, investing in quality ensures reliable performance, protects your arrows, and helps you build confidence that carries over to hunting or competition.

IN SHORT: A good field point keeps your arrows accurate, consistent, and safe, making it one of the most important components in archery.

CHOOSING A POINT CAN BE BROKEN DOWN INTO THESE CRITERIA:

USAGE:

If you are using a point to practice for hunting you will want a point that can be removed and is the same weight as your broadhead. If you are using a point for target purpose you can use a screw-in, glue-in or break-off point.

WEIGHT AND CONCENTRICITY:

Archery is all about consistency. Having the same weight points will help you keep tight groups in hunting or target archery.
NOTE: Concentricity means that the tip is actually in the center of your point. If this is off, even by the tiniest amount, your arrow will not fly true.

DURABILITY:

The material and design of your point will allow you to shoot hundreds, if not thousands of shots, with the same point.

FIT AND COMPATIBILITY:

The diameter of the point needs to match your shaft to ensure smooth flight and easy removal from the target.

IN SHORT: Choose points that match your arrow and bow setup, are durable, and suit your purpose

ABOUT BOHNING PREMIUM POINTS:

USAGE:

Bohning has a full line of screw-in, glue-in, and break off points that are manufactured using the best materials and machinery to ensure consistent shots time after time.

WEIGHT AND CONCENTRICITY:

Bohning has industry-leading weight tolerances. Our points are guaranteed ± 0.25 GRAINS (16.2 mg) of listed weight. Our points that are below 150gn we guarantee that they are concentric withing 0.001" (0.025mm). 150gn and above are 0.002" or better.

DURABILITY:
Bohning Premium Points are made of durable stainless steel to ensure they last.

FIT AND COMPATIBILITY:
Bohning points are made with easy removal in mind.

Color-coded Bohning Premium Points are coming in 2027. Creating an easy way to identify high-quality points. Follow us online for the most up-to-date information.

WRAPS
WRAP USAGE AND FIT

WHY USE A WRAP?
Arrow wraps were originally designed to replicate the look of traditional painted or crested arrows. Today, these thin vinyl coverings give archers several practical advantages with very few drawbacks.

BENEFITS:

- **Visibility** – Bright or white wraps make arrows much easier to spot in grass, weeds, or woods.
- **Tracking** – For hunters, white wraps clearly show blood after a hit, helping with game recovery.
- **Adhesion** – Vanes and feathers bond more securely to vinyl than to bare shafts, especially aluminum or glossy carbon finishes.
- **Ease of refletching** – Removing a wrap is often easier than scraping vane adhesive directly off the shaft, making cleanup simpler during refletching.
- **Style** – Wraps come in a wide range of colors and designs, allowing you to personalize your arrows.

DISADVANTAGES:

- **Refletching** – If you lose a vane that was fletched over a wrap, you'll typically need to remove the entire wrap before redoing the fletching.
- **Weight** – Wraps add a small amount of extra weight to your arrow. While minimal, it should be factored in when tuning or building a new set of arrows.

IN SHORT: Wraps make arrows easier to see, easier to fletch, and more customizable, while adding only minor drawbacks in weight and refletching.

ABOUT BOHNING WRAPS:
All arrow wraps are not created equal.

Different manufacturers use varying grades of materials, and without the proper surface coating and thickness, adhesion issues can occur. Bohning wraps are made from materials that have been thoroughly tested and proven for both adhesion strength and long-term durability.

WIDTH:
- XS - 0.85" (22mm) for use on shafts up to 14/64"
- SM - 1.00" (25mm) for use on shafts up to 17/64"
- STD - 1.125" (29mm) for use on shafts up to 19/64"
- LG - 1.375" (35mm) for use on shafts up to 24/64"
- XL - 1.50" (38mm) for use on shafts up to 26/64"

Note: Bohning recommends that the wrap overlap itself by ~1/8" for best adhesion

LENGTH:
- 4" - Vanes up to 2.5" Long
- 5.5" - Vane longer than 2.5"
- 7.0" - Traditional crested arrow look or long feathers

MATERIALS:
- White
- Neon/Gloss
- Reflective
- Glow in the Dark

WEIGHT:
- 4" - White/Neon = 4.0 gn-9.5 gn / Reflective & Glow = 8.0 gn-14.5 gn
- 5.5" - White/Neon = 5.5 gn-13.0gn / Reflective & Glow = 11 gn-19.7 gn
- 7.0" - White/Neon = 7.0 gn-16.5gn / Reflective & Glow = 14.0 gn-25.5gn

** weight varies dependent on width of wrap*

Fletching Jigs
Buying a fletching jig is one of the best investments an archer can make. A jig allows you to repair or build arrows at home with precision, saving both time and money compared to relying on pre-fletched shafts. With a jig, you control every detail—vane type, angle, offset, or helical—so you can customize arrows to match your shooting style, bow setup, or purpose, whether that's target shooting, hunting, or 3D archery. Instead of being limited to factory options, you can experiment and fine-tune your arrows for maximum consistency and performance.

A fletching jig also ensures accuracy and repeatability. It holds each vane in perfect alignment, so every arrow in your quiver is built the same, shot after shot. Over time, it pays for itself by letting you refletch damaged vanes instead of buying new arrows, and it gives you the confidence of knowing your equipment is tuned exactly the way you want it.

IN SHORT: A fletching jig saves money, gives you full control over your arrow setup, and ensures precision and consistency in every arrow you shoot.

PRO TIP: Do not use a knife to scrape excess glue from jigs; this can damage the jig. Place removable Bohning inserts in acetone for two minutes, then wipe clean with a small brush. Glue will fall off with little effort and be as good as new.

CHOOSING A JIG CAN BE BROKEN DOWN INTO THESE CRITERIA:

FLETCHING STYLE:
- Straight, offset, or helical options
- Some jigs only do one style, while others are adjustable

NUMBER OF VANES/FEATHERS
- 3-fletch is standard, but 4-fletch setups are popular
- Check if the jig can accommodate both

SHAFT SIZE/TYPE COMPATIBILITY
- Make sure the jig works with the diameter of your arrows (micro, standard, or larger shafts)
- Does your jig allow fletching of crossbow bolts?

VANE/FEATHER LENGTH
- Some jigs handle only shorter vanes, while others can work with longer feathers or specialty vanes.

CONSISTENCY
- The jig should hold vanes securely and place them in exactly the same position on every arrow.

ADAPTABILITY
- Ability to rotate the nock receiver for different indexing (3-fletch at 120°, 4-fletch at 90°, etc.).
- Fine-tuning for vane offset or helical angle.

EASE OF USE
- How simple it is to load, align, and clean.
- Beginners may prefer a straightforward clamp system, while experienced archers might want more adjustability.

SPEED AND EFFICIENCY
- Single-fletch jigs attach one vane at a time (slower but very precise).
- Multi-fletch jigs (like a 3-fletch jig) can apply all vanes at once.

PRICE VS. VALUE
- Budget-friendly jigs are great for occasional refletching.
- Higher-end jigs offer precision, versatility, and durability that pay off for serious archers.

IN SHORT: Think about what kind of arrows you shoot, how much adaptability you want, and how often you'll be fletching—then balance precision, speed, and cost to pick the right jig.

ABOUT BOHNING FLETCHING JIGS:

Bohning's line of jigs will accommodate any style of you might be interested in trying. From clamp style jigs to 3 vane at once jigs and from feathers to mylar to plastic vanes we have you covered.

All of our jigs are designed and manufactured in the USA by engineers that are archers and understand the importance of consistency and ease of use.

JIG	HOW MANY VANES			XBOW	TYPE OF VANE			OFFSET/HELICAL							
	3 Vane	4 Vane 90/90/90/90	4 Vane 60/120/60/120		Plastic Vane	Feather	Mylar	Straight	1° Right	1° Left	1.5° Right (NASP)	2° Right Feather	2° Left Feather	3° Right	3° Left
Frontier 1346COMPLETE	√	√		√	√			√	√	√	√			√	√
Frontier 1346	√	√			√									√	√
Frontier Crossbow 1346XB	√			√	√				√						
Frontier Youth 1346YOUTH	√	√			√			√			√				
Multi-Fletcher 601055	√	√	√	√	√	√		√	√	√	√	√	√	√	√
Cauldron 601025	√*				√			√	√	√	√			√	√
Cauldron Crossbow 601025XB	√*			√	√				√	√				√	√
Cauldron Helix 601025HELIX	√*				√									√	√
Cauldron Youth 601025YOUTH	√*				√			√			√				
Pro Class 1347	√	√		√	√			√	√	√					
Complete Tower 601027	√*			√	√	√	√	√	√	√	√	√	√	√	√
Triple Tower 12963	√*			√	√			√	√					√	
Helix Tower 12962	√*			√	√									√	√
Feather Tower 601010	√*					√						√	√		
Mylar Tower 601035	√						√	√							
Spin Fletcher 601070	√*						√	√							

**The Cauldrons, Towers, and Spin Fletcher can all fletch 3 vanes at once. All others are one vane at a time.*

WAXES & LUBES WHICH ONE SHOULD I USE?

Bowstring wax is a simple but essential product for maintaining the life and performance of your bowstring. Regular waxing keeps the individual strands of the string and cables bound tightly together, preventing fraying, separating, or snapping under the stress of repeated shots. Wax also protects against dirt, dust, and especially moisture, which can weaken fibers over time and shorten the life of your string. A properly waxed string remains flexible and strong, helping it transfer energy more efficiently from the bow to the arrow. Neglecting this small step can lead to premature string wear, reduced accuracy, and costly replacements.

Bohning recommends applying wax every 200 shots to keep your string in top condition.

IN SHORT: Waxing your bowstring regularly preserves its strength, protects it from damage, and ensures consistent, reliable performance.

ABOUT BOHNING WAXES AND LUBES:

Bohning has a full line of waxes and lubes for all of your archery needs. Bohning created Tex-Tite bow string wax in 1952. It has been an industry standard ever since. Since then, our line of waxes have expanded to keep up with the modern innovations of the archery industry. Below is a guide to help you choose which wax is best for you.

WAXES:

Tex-Tite - "The Original" - Waterproof, odorless, smooth and silky feel - over 70 years of proven track record

Seal-Tite - Modern formulation - Waterproof, odorless, vegan with a tackier feel - perfect for synthetic strings

Heritage String Wax - 100% Natural - Waterproof, odorless - made with bee's wax and soy for those that want a traditional string wax

Xccelerator - String Conditioner - Waterproof, odorless, and vegan - melts at a lower temperature. Great for crossbows and slides, wheels, and rollers

String Shield - Liquid wax - Waterproof, odorless, and vegan - sponge-top applicator, the liquid formulation penetrates the bow string

LUBES:

Lightning Lube - Crossbow Rail Lube - Waterproof, odorless, vegan, liquid formulation - created for application on crossbow rails, provides a protective film for reduced friction and increased velocity

Arrow Lube - Easy arrow removal - Waterproof, odorless, vegan, liquid formulation - created to apply on the end of your arrow to make removal from targets easier

ZipSnap - Zipper and Snap Wax - Waterproof, odorless - for use on metal or plastic zippers and snaps, lubricates, prevents seizing, will not freeze

DIGITAL VERSION AVAILABLE SCAN THE QR CODE BELOW TO VISIT OUR WEBSITE!

www.bohning.com/technical-guide

REPLACEMENT PARTS

ADHESIVES

1304 — Dispenser Bottle Regular Nozzles and Caps, 6 pk (red)
13032 — Dispenser Bottle Deluxe Nozzles and Caps, 6 pk (white)
1316 — Alcohol Burner Replacement Wick
1134 — Platinum Thinner* - 1 Pint (473.1 ml)

**PLATINUM GLUE IS FORMULATED TO WORK BEST WITHOUT THINNING. ONLY USE PLATINUM THINNER WITH PINT, QUART, OR GALLON SIZES OF PLATINUM THAT HAVE THICKENED WITH TIME.*

CRESTING AND DIPPING

1400 — Hair Line Cresting Brush
1401 — 1/8" Cresting Brush (3.18 cm)
1402 — 1/4" Cresting Brush (6.35 cm)
1403 — 1/2" Cresting Brush (12.7 cm)

801095 — Dip Tube
801098 — Arrow Hanger
801100 — Dip'n Plug Ring

FLETCHING JIGS

Blazer® Jigs and The Big Jig
1319 — Clamp Release Tape, 3 pieces
13192 — Clamp Release Tape Bulk Pack, 21 Pieces
8250 — Blazer Straight Clamp
8251 — Blazer 3° Right Helical Clamp
8361 — Big Jig 3° Right Helical Clamp
8362 — Big Jig 1° Right Offset Clamp
601004 — Crossbow Receiver / Adapter
601009 — 4 Fletch Disk Adapter

Multi-Fletcher®
601056 — Multi-Fletcher Clamp
601057 — Insert, 3° Right Helical
601058 — Insert, 1° Right offset
601064— Insert, 1.5° Right offset
601059 — Insert, Straight
601060 — Insert, 1° Left Offset
601061 — Insert, 3° Left Helical
601062 — Insert, Feather 2° Right Offset
601063 — Insert, Feather 2° Left Offset

Frontier Jig
601056 — Frontier Clamp
601057 — Insert, 3° Right Helical
601058 — Insert, 1° Right offset
601064— Insert, 1.5° Right offset
601059 — Insert, Straight
601060 — Insert, 1° Left Offset
601061 — Insert, 3° Left Helical
601004 — Crossbow Receiver / Adapter

Tower® Jigs
601011 — Center Post for .246 (6.25 cm) ID (Standard size)
601012 — Center Post for Pin Adapter
601013 — Center Post for .167" (5.50 cm) ID (F Nock size)
601014 — Center Post for .204" (5.18 cm)ID (A Nock size)
601015 — Center Post for Crossbow Bolts
601016 — Center Post for Swedged-end Arrows
601030 — Center Post for .231" (5.87 cm) ID (H.E. Nock size)
1200 — Arms, 1° Right Offset (red), set of 3
1201 — Arms, Straight (gray), set of 3
1202 — Arms, 3° Helical (black), set of 3
601007 — Arms, Impulse Straight (yellow), set of 3
601024 — Arms, Mylar Straight (gray w/ red clip), set of 3
601037 — Arms, 1° Left Offset (orange), set of 3
601038 — Arms, 3° Left Helical (purple), set of 3
601008L — Arms, Feather Left Wing (green), set of 3
601008R — Arms, Feather Right Wing (blue), set of 3
80211 — Tower Spacers, set of 3
601017 — Pressure Ring, Small (red)
601018 — Pressure Ring, Large (lime)
601036 — Pressure Ring, X-Large (orange)
1319 — Clamp Release Tape, 3 pieces
13192 — Clamp Release Tape, Bulk Pack (21 Pieces)

Pro Class Jig
1351 — Straight Clamp
1352 — Right Clamp
1353 — Left Clamp
601020 — 1" (25cm) Griffin Vane Clamp
601004 — Crossbow Bolt Receiver-Adapter

Cauldron Jig
601026 — Adjustable Compression Ring
601057-3 — (3) Inserts, 3° Right Helical
601058-3 — (3) Inserts, 1° Right offset
601064-3— (3) Inserts, 1.5° Right offset
601059-3 — (3) Inserts, Straight
601060-3 — (3) Inserts, 1° Left Offset
601061-3 — (3) Inserts, 3° Left Helical
601028 — Cauldron Insert Positioning Clip - 3 pk

Cauldron Jig Crossbow Edition
800-XB — Cauldron XBow Center Post (Only works with Crossbow Cauldron)
601026 — Adjustable Compression Ring
601057-3 — (3) Inserts, 3° Right Helical
601058-3 — (3) Inserts, 1° Right offset
601060-3 — (3) Inserts, 1° Left Offset
601061-3 — (3) Inserts, 3° Left Helical
601028 — Cauldron Insert Positioning Clip - 3 pk

Spin Fletcher
601071 — O-rings for Spin Fletcher, 3pk
601072 — Assembled Arm for Spin Fletcher, Right, 1 piece
601072-L — Assembled Arm for Spin Fletcher, Left, 1 piece

QUIVERS

Bruin Quiver
201031 — Retainer Set
201032 — Tree Hanging Loop
1073 — Lever Lock

Lynx® Quiver
1045 — Retainer Set for small .166" (4.22 cm and .204" (5.18 cm) arrows
10382 — Retainer Set for standard-size arrows

STRIPPER TOOLS

801026 — The Strip-Pro Blades, 3 pk (for new black stripper)

SHOOTER STOOL

701057 — Arrow tubes with clips

park & trail pet co.

NOT JUST AN ARCHERY COMPANY

Bohning has six other company divisions that manufacture dairy cow hoof blocks, golf ferrules, fishing supplies, pet supplies, promotional products, and more. See the front inside cover of this catalog or contact us to learn more about these products!

PAMPERED POOCH™

PARK AND TRAIL™ PAW BALM



- All natural
- Non-toxic
- Lick safe
- Easy to apply



Helps soothe paws and noses that are exposed to sidewalks, pavement, dry floors, patios, winter salt, summer heat, and seasonal changes. Good for daily use. All natural and non-toxic blend with calendula and rosemary extracts.

PT1 – Pampered Pooch 2.25 oz Twist-up Tube

PT2 – Pampered Pooch 2 oz Tin

TRAIL DEFENSE™

PARK AND TRAIL™ PAW BALM



- All natural
- Non-toxic
- Lick safe
- Easy to apply

PARKANDTRAILPET.COM
FOLLOW US ON SOCIAL MEDIA!



Protects and moisturizes paws and noses to keep working dogs moving and comfortable. Soothes after days spent in the woods and on pavement. All natural and non-toxic blend with cedarwood and frankincense extracts.

PT3 – Trail Defense 2.25 oz Twist Up Tube

PT2 – Trail Defense 2 oz Tin

HARD POINT™ STAKES AND TIE-DOWNS

HIGH-QUALITY STAINLESS STEEL



- Securing ground and elevated blinds
- Anchoring tarps and awnings
- Guy lines for camping and hiking
- Tent and shelter tie-down
- Construction
- Garden netting and landscape fabric
- Temporary fencing and event setups
- General outdoor anchoring tasks

HPS-7 – Hard Point Stakes 7 Pack

MADE IN USA

You won't find a better tie-down than this! Designed for those construction or DIY jobs that require the strongest tie-downs. Made from high-quality stainless steel off-cuts (the same steel we use to create our Premium Points), these durable stakes give premium material a second life while helping reduce waste. Strong, corrosion-resistant, and built to last, Hard Point™ stakes are a practical and sustainable choice for campers, hikers, and outdoor enthusiasts.

MADE FROM PREMIUM MATERIAL OFF-CUTS
DESIGNED WITH SUSTAINABILITY IN MIND


BOHNING®
7361 N 7 MILE RD, LAKE CITY, MI 49651
MANUFACTURING INNOVATIVE ARCHERY PRODUCTS
IN NORTHERN MICHIGAN SINCE 1946
WWW.BOHNING.COM
INFO@BOHNING.COM
231.229.4247